

**-8V P-Channel Enhancement Mode MOSFET**


# MTA010P01KDFJ6

$BV_{DSS}$	-8V
$I_D @ V_{GS} = -4.5V, T_C = 25^\circ C$	-15.2A
$I_D @ V_{GS} = -4.5V, T_A = 25^\circ C$	-11.4A
$R_{DS(on)} @ V_{GS} = -4.5V, I_D = -11A$	9mΩ (typ.)
$R_{DS(on)} @ V_{GS} = -2.5V, I_D = -7A$	12mΩ (typ.)
$R_{DS(on)} @ V_{GS} = -1.8V, I_D = -5A$	17mΩ (typ.)
$R_{DS(on)} @ V_{GS} = -1.5V, I_D = -3A$	25mΩ (typ.)


**Features**

- Low on-resistance
- Excellent thermal and electrical capabilities
- ESD protected gate, **HBM** ≥ 5kV
- Pb-free lead plating and halogen-free package

**Equivalent Circuit**

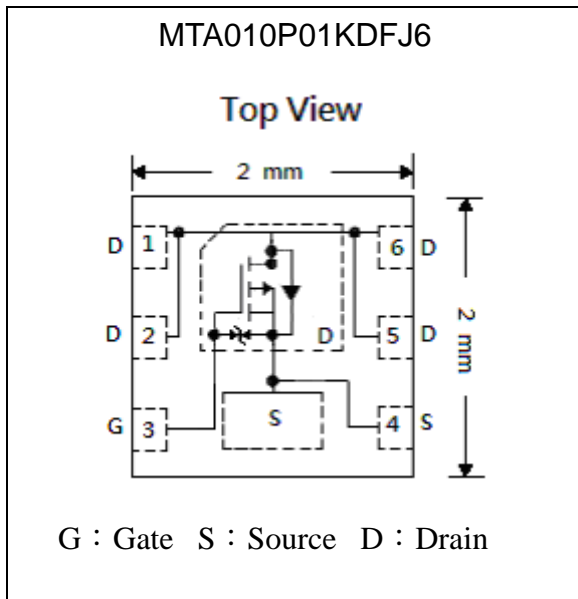


**Outline**

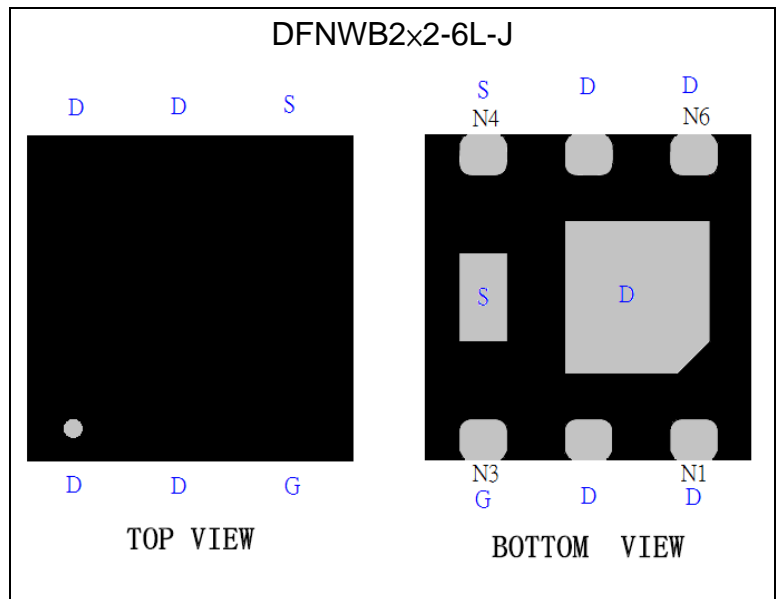

**Ordering Information**

Device	Package	Shipping
MTA010P01KDFJ6-0-T1-G	DFNWB2x2-6L-J (Pb-free lead plating and halogen-free package)	3000 pcs / tape & reel

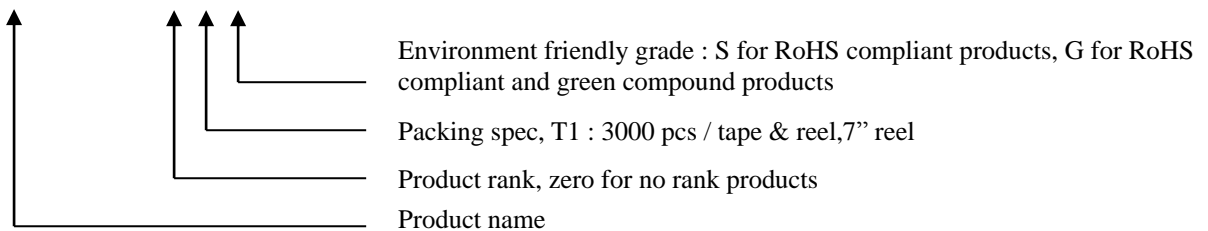



**Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Limits	Unit
Drain-Source Voltage	V <sub>DS</sub>	-8	V
Gate-Source Voltage	V <sub>GS</sub>	±8	
Continuous Drain Current @ T <sub>A</sub> =25°C, V <sub>GS</sub> =-4.5V (Note 3)	I <sub>DSM</sub>	-11.4	A
Continuous Drain Current @ T <sub>A</sub> =70°C, V <sub>GS</sub> =-4.5V (Note 3)		-9.1	
Continuous Drain Current @ T <sub>C</sub> =25°C, V <sub>GS</sub> =-4.5V	I <sub>D</sub>	-15.2	
Continuous Drain Current @ T <sub>C</sub> =70°C, V <sub>GS</sub> =-4.5V		-12.1	
Pulsed Drain Current (Note 1, 2)	I <sub>DM</sub>	-47	
Body Diode Continuous Forward Current (Note 3)	I <sub>S</sub>	-3	
ESD susceptibility (Note 4)	V <sub>ESD</sub>	5000	V
Power Dissipation @ T <sub>A</sub> =25°C (Note 3)	P <sub>DSM</sub>	2.5	W
Power Dissipation @ T <sub>A</sub> =70°C (Note 3)		1.6	
Power Dissipation @ T <sub>C</sub> =25°C	P <sub>D</sub>	4.4	
Power Dissipation @ T <sub>C</sub> =70°C		2.8	
Operating Junction and Storage Temperature	T <sub>j</sub> , T <sub>stg</sub>	-55~+150	°C

**Thermal Data**

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-case, max	R <sub>th,j-c</sub>	28	°C/W
Thermal Resistance, Junction-to-ambient, max	R <sub>th,j-a</sub>	50 (Note 3)	


- Note : 1. Pulse width limited by maximum junction temperature.  
 2. Duty cycle ≤ 1%.  
 3. Surface mounted on 1 in<sup>2</sup> copper pad of FR-4 board, t ≤ 10s.  
 4. Human body model, 1.5kΩ in series with 100pF.

**Electrical Characteristics (Ta=25°C)**

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
<b>Static</b>					
BV <sub>DSS</sub>	-8	-	-	V	V <sub>GS</sub> =0V, I <sub>D</sub> =-250μA
V <sub>GS(th)</sub>	-0.4	-	-0.9		V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =-250μA
I <sub>GSS</sub>	-	-	±10	μA	V <sub>GS</sub> =±8V, V <sub>DS</sub> =0V
I <sub>DSS</sub>	-	-	-1		V <sub>DS</sub> =-6.4V, V <sub>GS</sub> =0V
	-	-	-10	V <sub>DS</sub> =-6.4V, V <sub>GS</sub> =0V, T <sub>j</sub> =55°C	
*R <sub>D(S)ON</sub>	-	9	12.6	mΩ	V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-11A
	-	12	18		V <sub>GS</sub> =-2.5 V, I <sub>D</sub> =-7A
	-	17	26		V <sub>GS</sub> =-1.8V, I <sub>D</sub> =-5A
	-	25	40		V <sub>GS</sub> =-1.5V, I <sub>D</sub> =-3A
*G <sub>F</sub> S	-	10	-	S	V <sub>DS</sub> =-5V, I <sub>D</sub> =-3A
<b>Source-Drain Diode</b>					
*V <sub>SD</sub>	-	-0.6	-1	V	V <sub>GS</sub> =0V, I <sub>S</sub> =-1A

\*Pulse Test : Pulse Width ≤ 300μs, Duty Cycle ≤ 2%


### Recommended Soldering Footprint

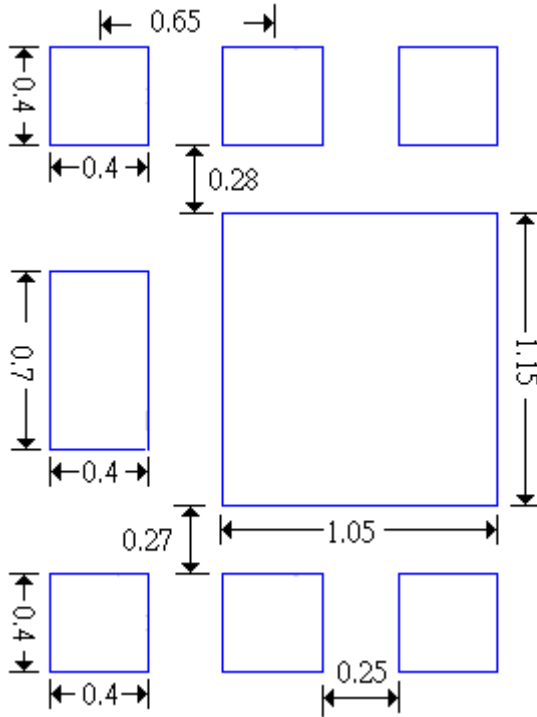


unit : mm

**Typical Characteristics**


Typical Output Characteristics

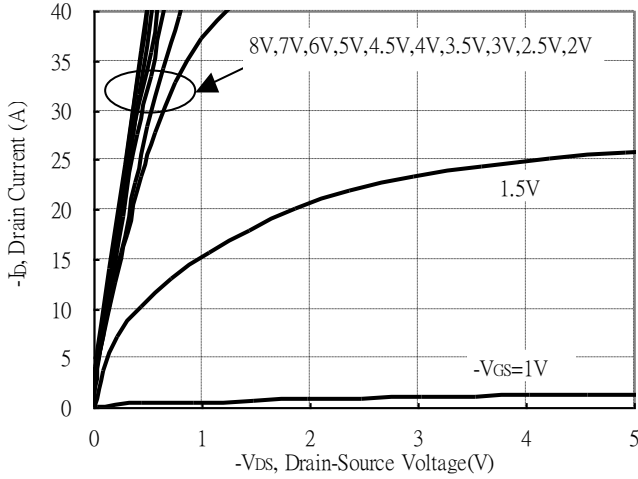


Brekdown Voltage vs Ambient Temperature

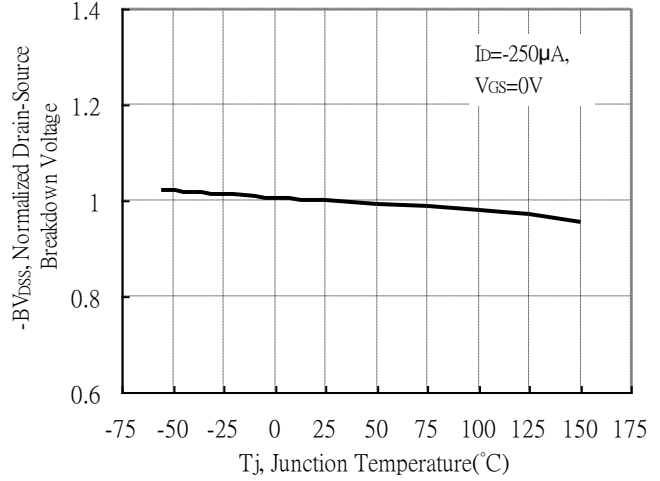


Static Drain-Source On-State resistance vs Drain Current

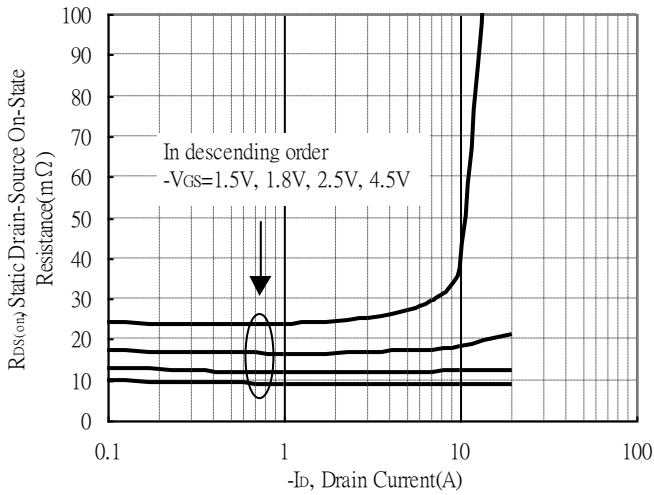


Reverse Drain Current vs Source-Drain Voltage

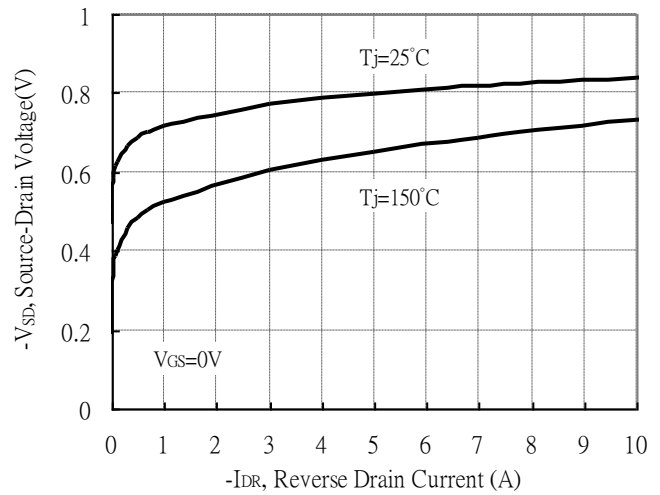

Static Drain-Source On-State Resistance vs Gate-Source Voltage

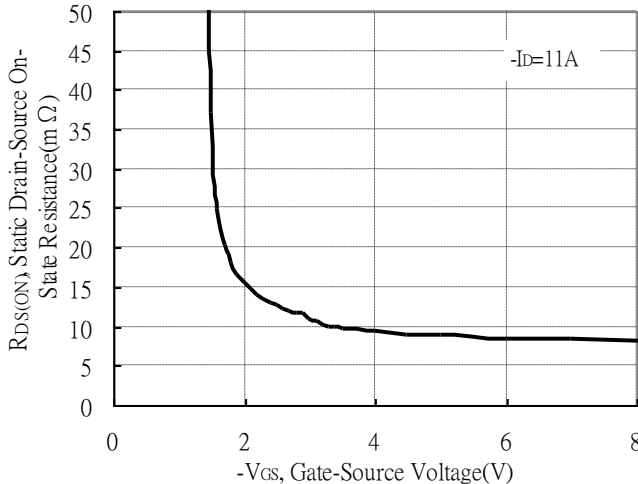


Drain-Source On-State Resistance vs Junction Temperature

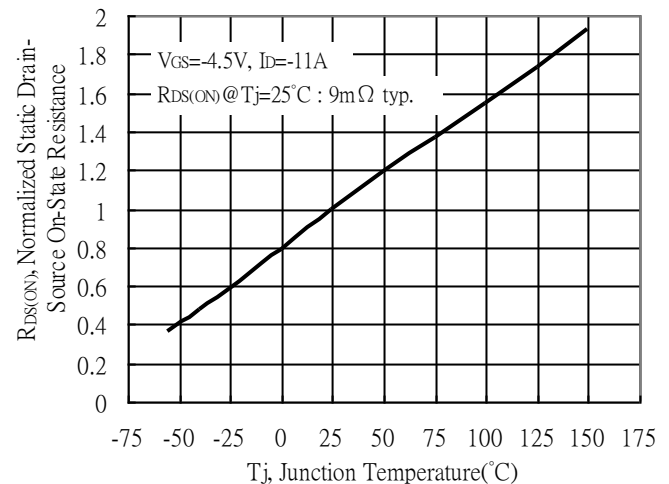


**Typical Characteristics(Cont.)**


Threshold Voltage vs Junction Temperature

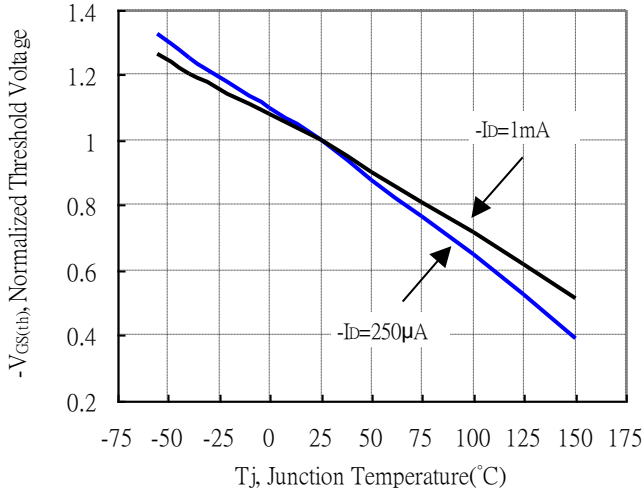


Forward Transfer Admittance vs Drain Current

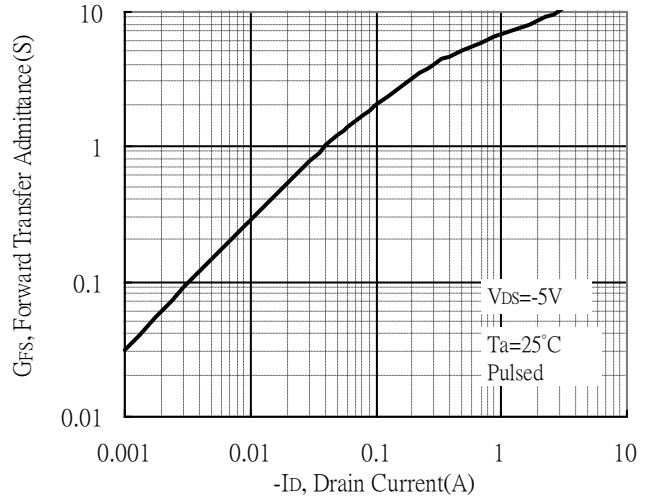


Single Pulse Power Rating, Junction to Case

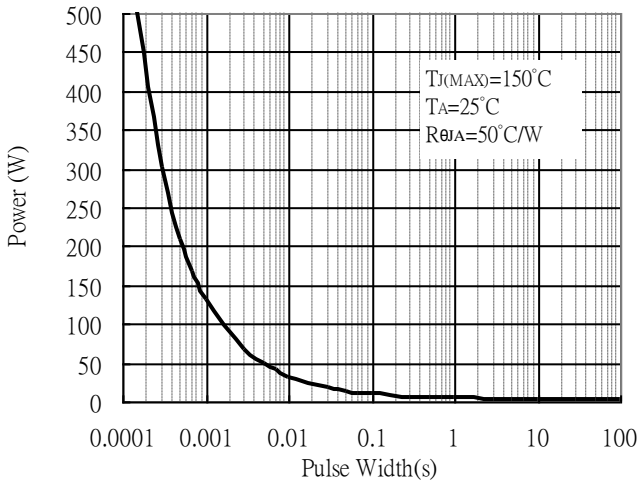

Maximum Drain Current vs Junction Temperature

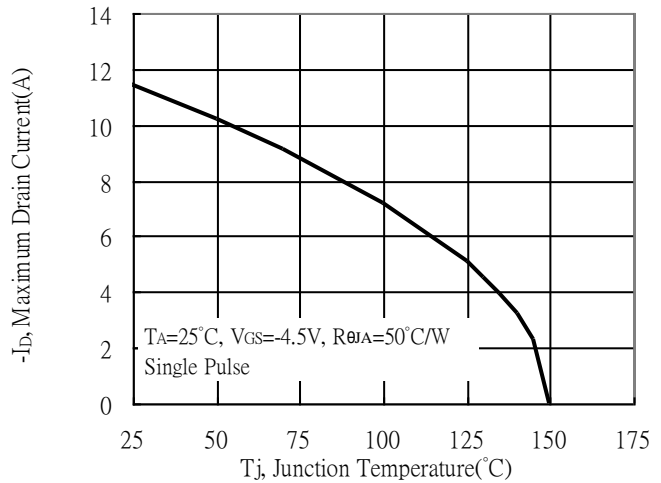


Maximum Safe Operating Area

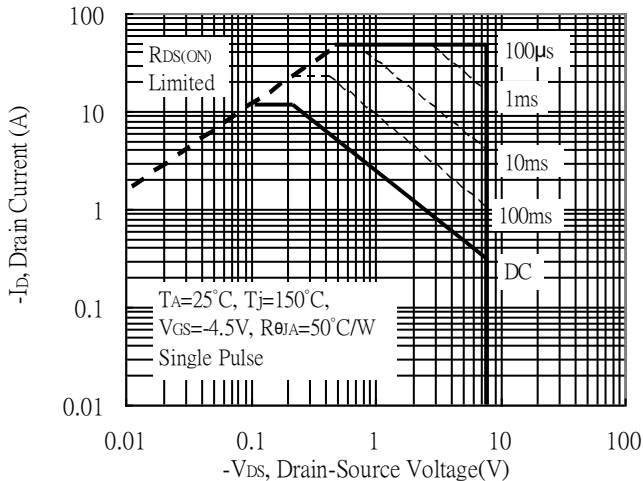


**Typical Characteristics(Cont.)**


Typical Transfer Characteristics

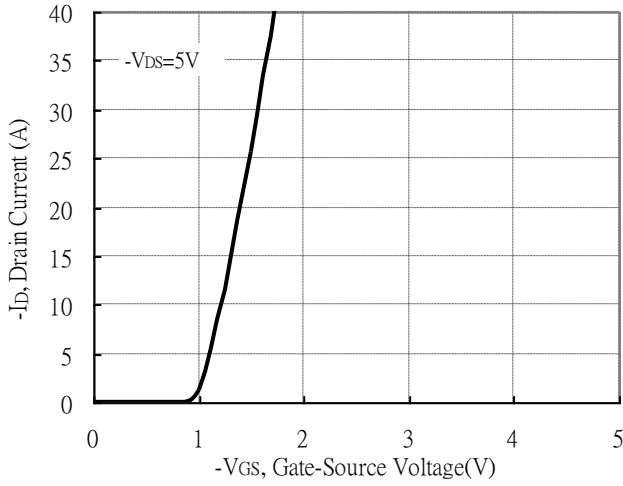


Power Derating Curve

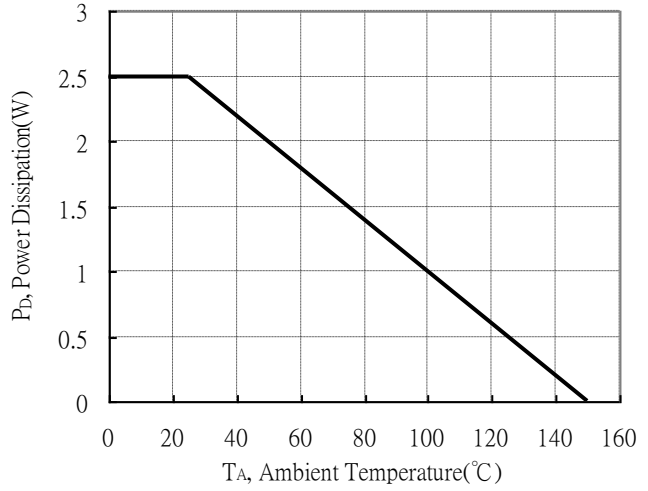


Transient Thermal Response Curves

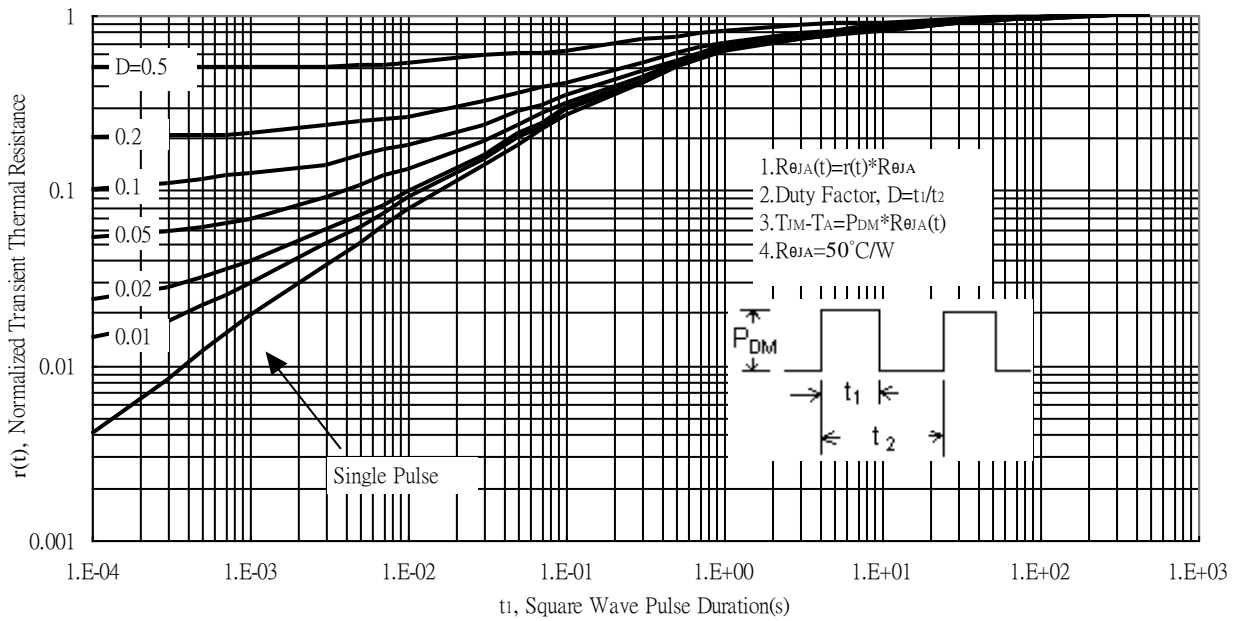

### Reel Dimension

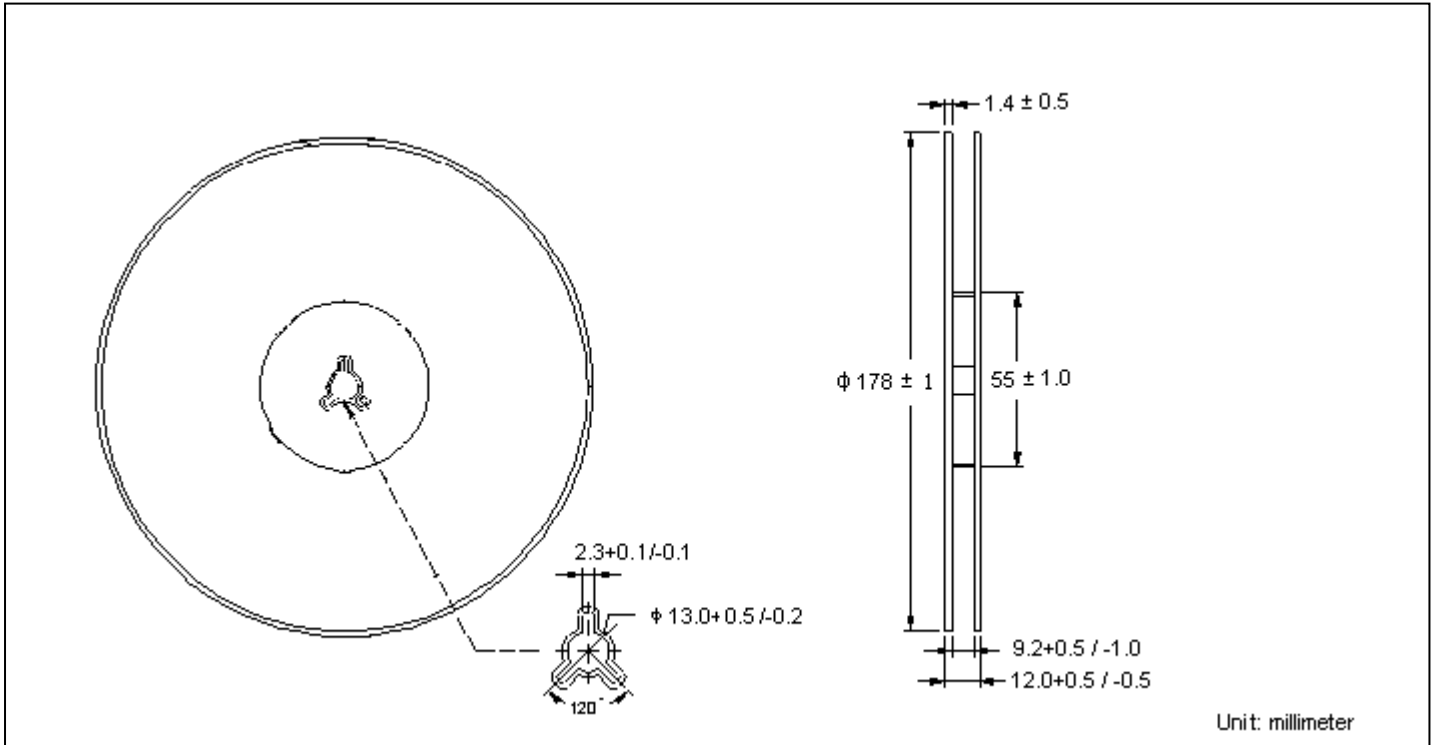


### Carrier Tape Dimension

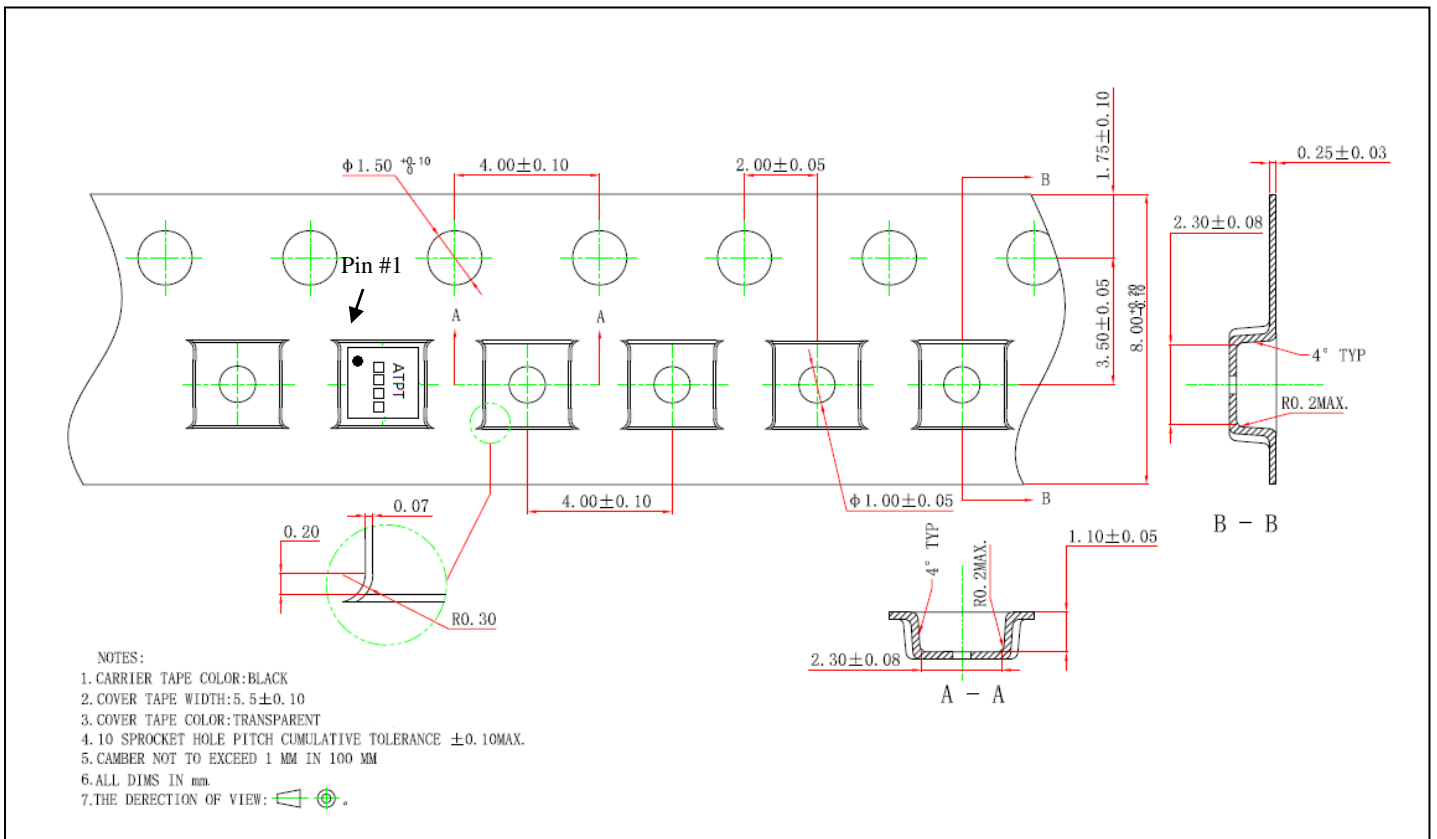

**Recommended wave soldering condition**

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds

**Recommended temperature profile for IR reflow**

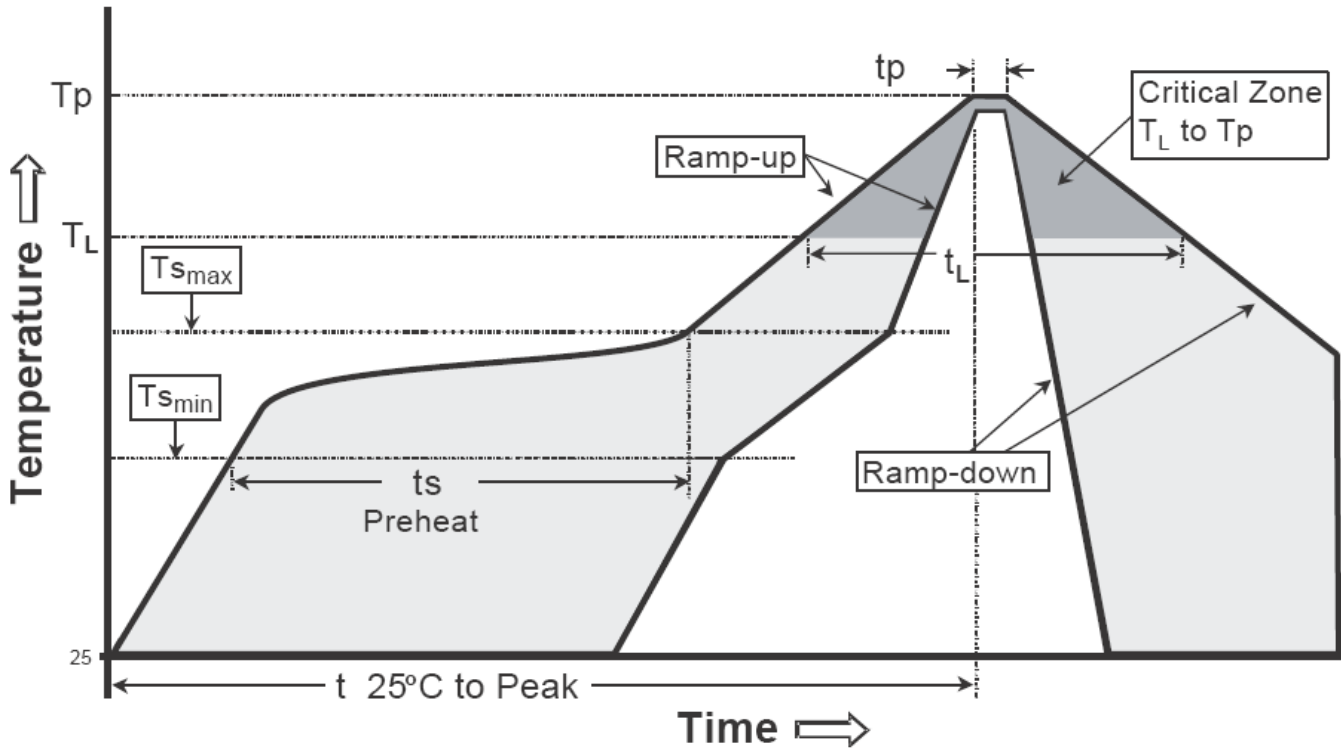


Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (Tsmax to Tp)	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(Ts min)	100°C	150°C
-Temperature Max(Ts max)	150°C	200°C
-Time(ts min to ts max)	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (Tl)	183°C	217°C
- Time (tl)	60-150 seconds	60-150 seconds
Peak Temperature(Tp)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.



**DFNWB2x2-6L-J Dimension**

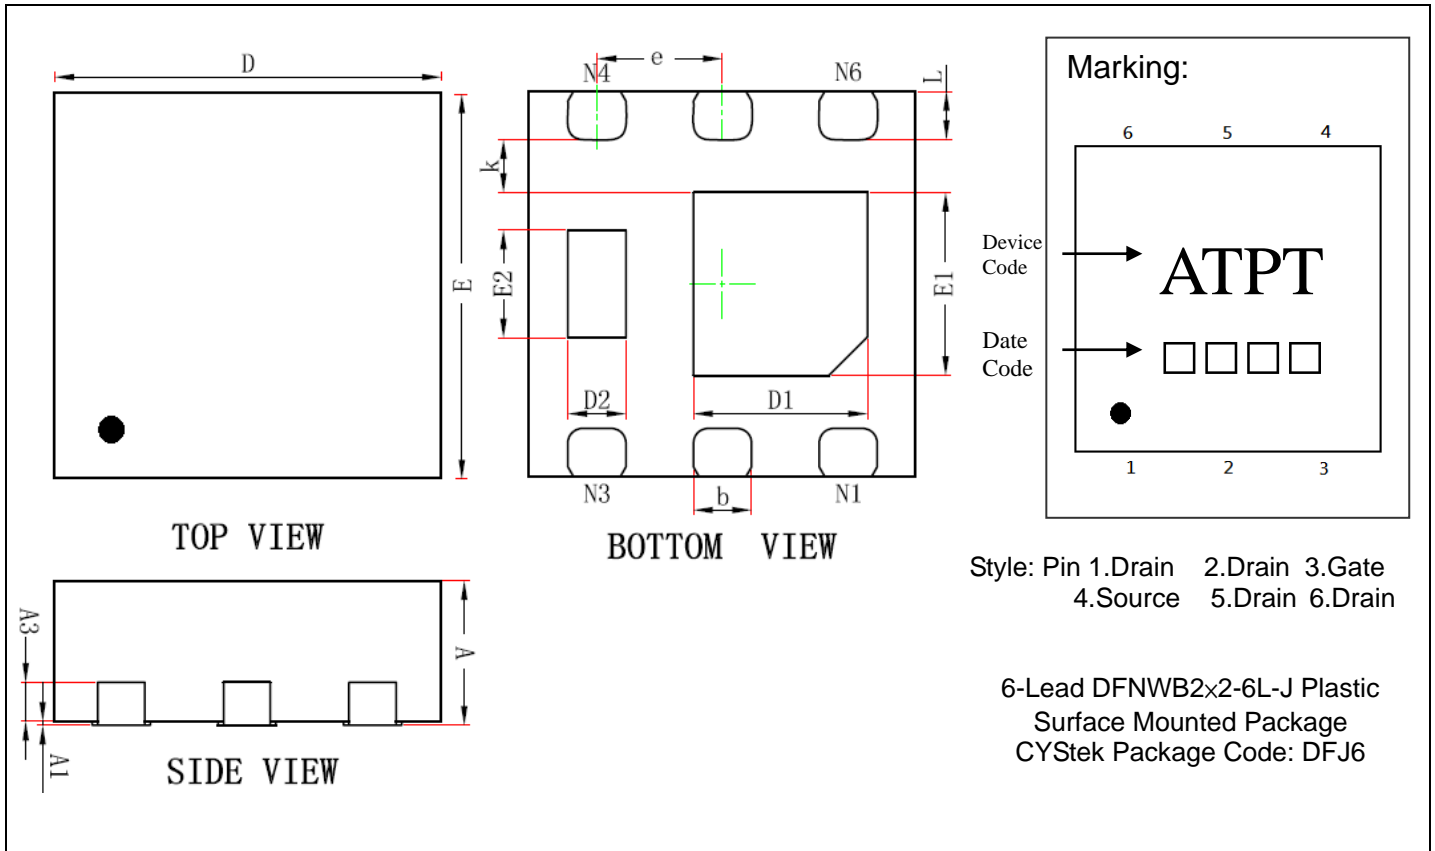

DIM	Millimeters		Inches		DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.700	0.800	0.028	0.031	D2	0.200	0.400	0.008	0.016
A1	0.000	0.050	0.000	0.002	E2	0.460	0.660	0.018	0.026
A3	0.203	REF	0.008	REF	k	0.200	-	0.008	-
D	1.924	2.076	0.076	0.082	b	0.250	0.350	0.010	0.014
E	1.924	2.076	0.076	0.082	e	0.650	TYP	0.026	TYP
D1	0.800	1.000	0.031	0.039	L	0.174	0.326	0.007	0.013
E1	0.850	1.050	0.033	0.041					

Notes: 1.Controlling dimension: millimeters.  
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.  
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

**Material:**

- Lead: Pure tin plated.
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0.

**Important Notice:**

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.