

N- AND P-Channel Enhancement Mode MOSFET


MTC3585G6

	N-CH	P-CH
BV_{DSS}	20V	-20V
I_D	4.5A($V_{GS}=4.5V$)	-3A($V_{GS}=-4.5V$)
$R_{DS(on)}$ (TYP.)	24m Ω ($V_{GS}=4.5V$)	56m Ω ($V_{GS}=-4.5V$)
	28m Ω ($V_{GS}=2.5V$)	71m Ω ($V_{GS}=-2.5V$)
	69m Ω ($V_{GS}=1.5V$)	125m Ω ($V_{GS}=-1.5V$)


Features

- Simple drive requirement
- Low gate charge
- Low on-resistance
- Fast switching speed
- Pb-free lead plating and halogen-free package

Equivalent Circuit

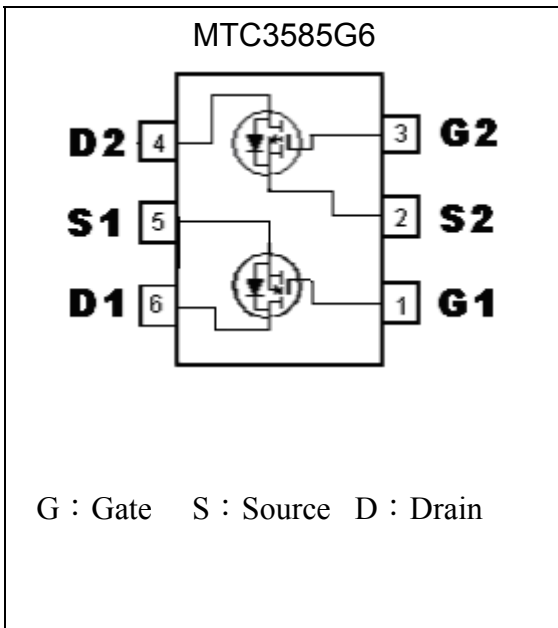


Outline

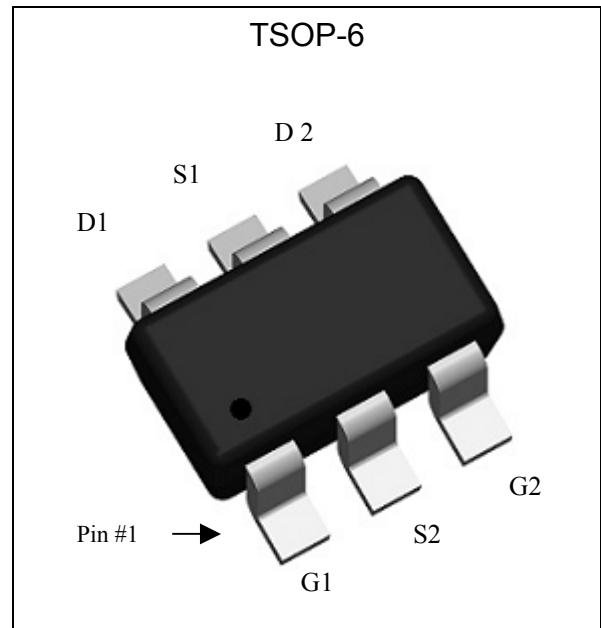

Ordering Information

Device	Package	Shipping
MTC3585G6-0-T1-G	TSOP-6 (Pb-free lead plating and halogen-free package)	3000 pcs / tape & reel

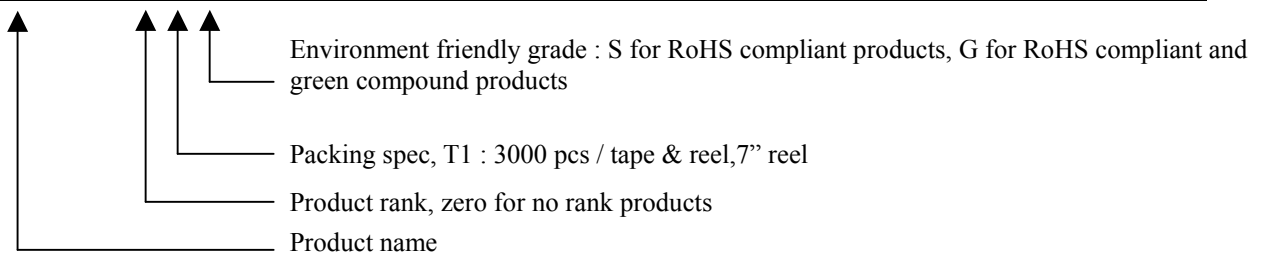



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Limits		Unit
		N-channel	P-channel	
Drain-Source Breakdown Voltage	BV _{DSS}	20	-20	V
Gate-Source Voltage	V _{GS}	±12	±12	
Continuous Drain Current @T _A =25 °C (Note 1)	I _D	4.5	-3	A
Continuous Drain Current @T _A =70 °C (Note 1)		3.6	-2.4	
Pulsed Drain Current (Note 2)	I _{DM}	20	-20	
Total Power Dissipation (Note 1)	P _d	1.14		W
Linear Derating Factor		0.01		W / °C
Operating Junction and Storage Temperature	T _j , T _{stg}	-55~+150		°C

Note : 1.Surface mounted on 1 in² copper pad of FR-4 board, t≤5 sec
 2.Pulse width limited by maximum junction temperature

Thermal Data

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-case, max	R _{θJC}	80	°C/W
Thermal Resistance, Junction-to-ambient, max	R _{θJA}	110 (Note)	

Note : Surface mounted on 1 in² copper pad of FR-4 board, t≤5 sec; 180°C/W when mounted on minimum copper pad

N-Channel Electrical Characteristics (Tj=25°C, unless otherwise specified)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static					
BV _{DSS}	20	-	-	V	V _{GS} =0V, I _D =250μA
ΔBV _{DSS} /ΔT _j	-	0.02	-	V/°C	Reference to 25°C, I _D =1mA
V _{GS(th)}	0.5	0.7	1.2	V	V _{DS} =V _{GS} , I _D =250μA
I _{GSS}	-	-	±100	nA	V _{GS} =±12V, V _{DS} =0V
I _{DSS}	-	-	1	μA	V _{DS} =20V, V _{GS} =0V
	-	-	10		V _{DS} =16V, V _{GS} =0V, T _j =70°C
*R _{D(S)ON}	-	24	35	mΩ	I _D =3.5A, V _{GS} =4.5V
	-	28	50		I _D =1.2A, V _{GS} =2.5V
	-	69	105		I _D =0.5A, V _{GS} =1.5V
*G _{FS}	-	7	-	S	V _{DS} =5V, I _D =3A
Dynamic					
C _{iss}	-	406	-	pF	V _{DS} =20V, V _{GS} =0V, f=1MHz
C _{OSS}	-	47	-		
C _{rSS}	-	37	-		
*t _{d(ON)}	-	4	-	ns	V _{DS} =15V, I _D =1A, V _{GS} =5V, R _G =3.3Ω, R _D =15Ω
*t _r	-	15.2	-		
*t _{d(OFF)}	-	28.2	-		
*t _f	-	5	-		



*Qg	-	7	-	nC	V _{DS} =16V, I _D =3A, V _{GS} =4.5V
*Qgs	-	0.7	-		
*Qgd	-	1.9	-		
Source-Drain Diode					
*V _{SD}	-	0.79	1.2	V	V _{GS} =0V, I _S =1.2A
*trr	-	5.4	-	ns	I _F =3A, V _{GS} =0V, dI _F /dt=100A/μs
*Qrr	-	2	-	nC	

*Pulse Test : Pulse Width ≤300μs, Duty Cycle ≤2%


P-Channel Electrical Characteristics (T_j=25°C, unless otherwise specified)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static					
BV _{DSS}	-20	-	-	V	V _{GS} =0V, I _D =-250μA
ΔBV _{DSS} /ΔT _j	-	-0.01	-	V/°C	Reference to 25°C, I _D =-1mA
V _{GS(th)}	-0.4	-0.8	-1.2	V	V _{DS} =V _{GS} , I _D =-250μA
I _{GSS}	-	-	±100	nA	V _{GS} =±12V, V _{DS} =0V
I _{DSS}	-	-	-1	μA	V _{DS} =-20V, V _{GS} =0V
	-	-	-25		V _{DS} =-16V, V _{GS} =0V, T _j =70°C
*R _{DS(ON)}	-	56	80	mΩ	I _D =-2.5A, V _{GS} =-4.5V
	-	71	130		I _D =-2A, V _{GS} =-2.5V
	-	125	350		I _D =-0.5A, V _{GS} =-1.5V
*G _{FS}	-	6	-	S	V _{DS} =-5V, I _D =-2A
Dynamic					
C _{iss}	-	597	-	pF	V _{DS} =-20V, V _{GS} =0V, f=1MHz
C _{oss}	-	54	-		
C _{rss}	-	40	-		
*t _{d(ON)}	-	4	-	ns	V _{DS} =-10V, I _D =-1A, V _{GS} =-10V, R _G =3.3Ω, R _D =10Ω
*t _r	-	16	-		
*t _{d(OFF)}	-	50	-		
*t _f	-	5.2	-		
*Qg	-	8.2	-	nC	V _{DS} =-16V, I _D =-2A, V _{GS} =-4.5V
*Qgs	-	1	-		
*Qgd	-	2	-		
Source-Drain Diode					
*V _{SD}	-	-0.82	-1.2	V	V _{GS} =0V, I _S =-1.2A
*trr	-	6.2	-	ns	I _F =-2A, V _{GS} =0V, dI _F /dt=100A/μs
*Qrr	-	2.3	-	nC	


*Pulse Test : Pulse Width ≤300μs, Duty Cycle ≤2%

N-channel Typical Characteristics


Typical Output Characteristics

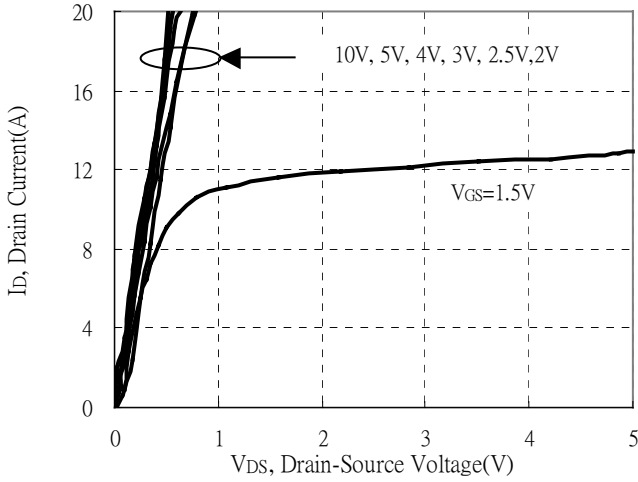


Brekdown Voltage vs Ambient Temperature

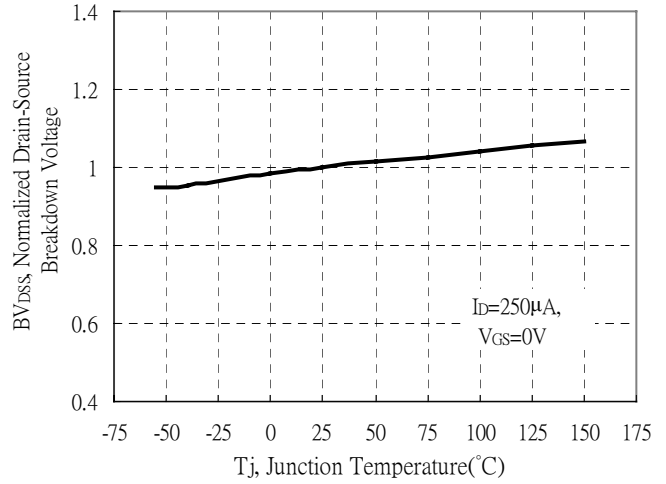


Static Drain-Source On-State resistance vs Drain Current

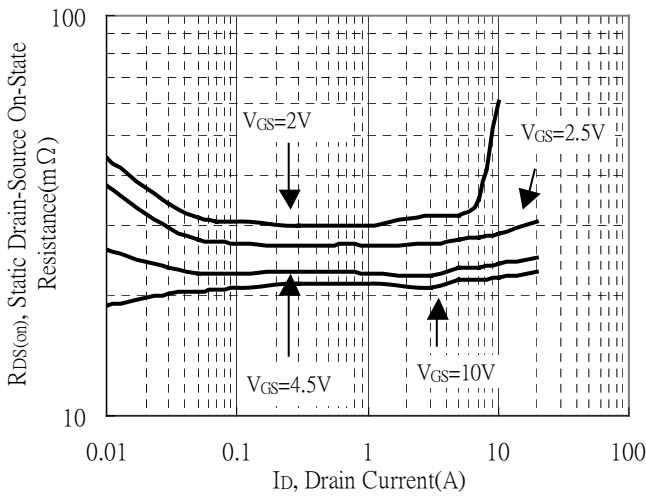


Reverse Drain Current vs Source-Drain Voltage

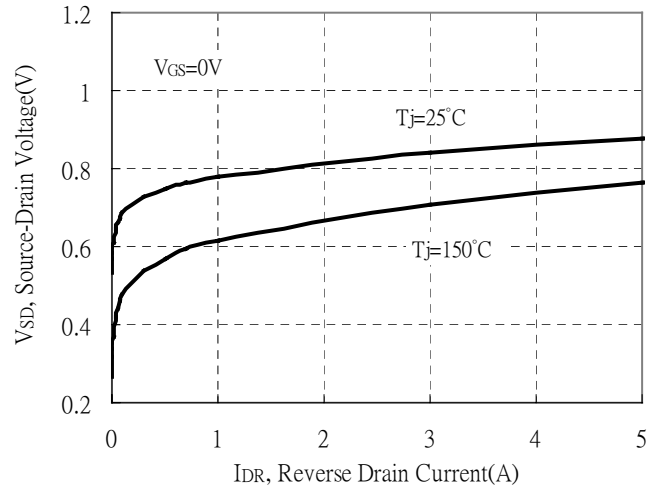

Static Drain-Source On-State Resistance vs Gate-Source Voltage

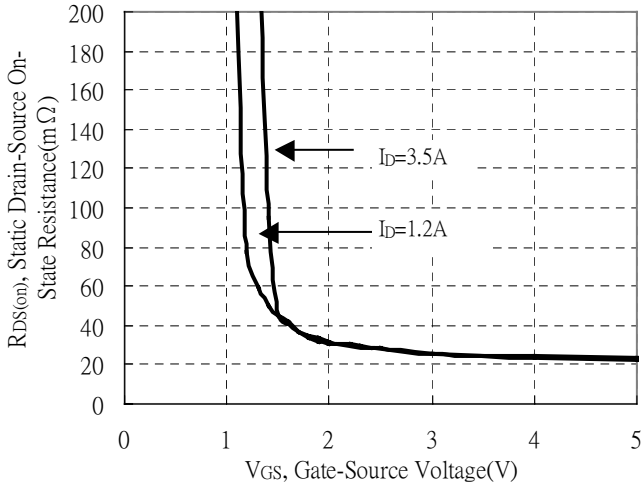


Drain-Source On-State Resistance vs Junction Temperature

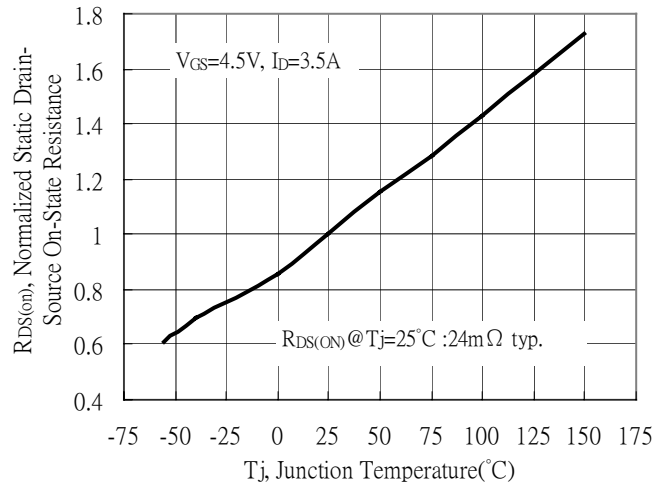


N-channel Typical Characteristics(Cont.)


Capacitance vs Drain-to-Source Voltage

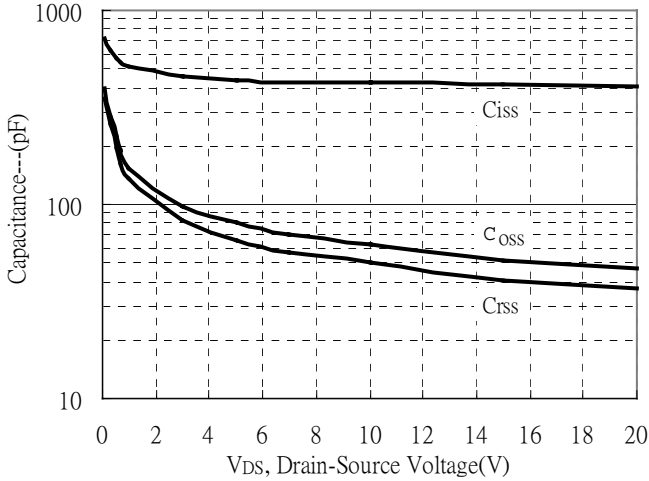


Threshold Voltage vs Junction Temperature

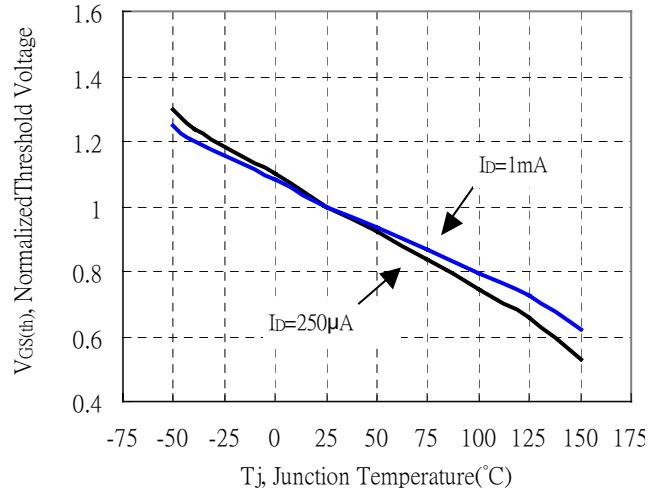


Single Pulse Power Rating, Junction to Ambient

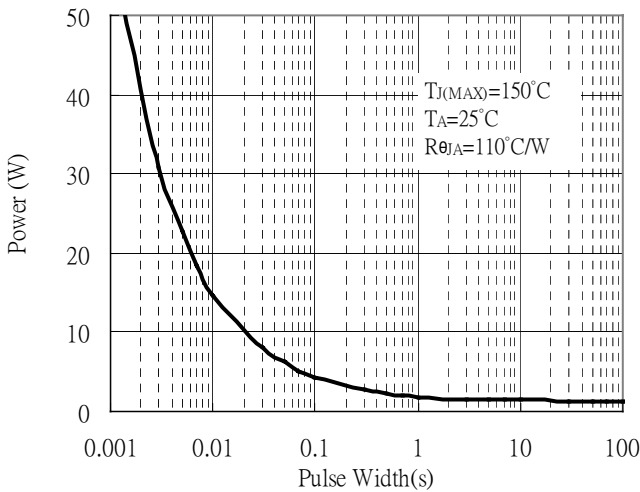


Gate Charge Characteristics

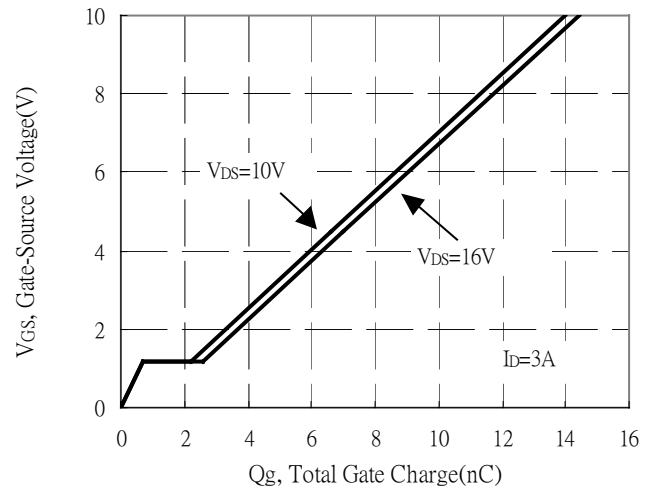

Maximum Safe Operating Area

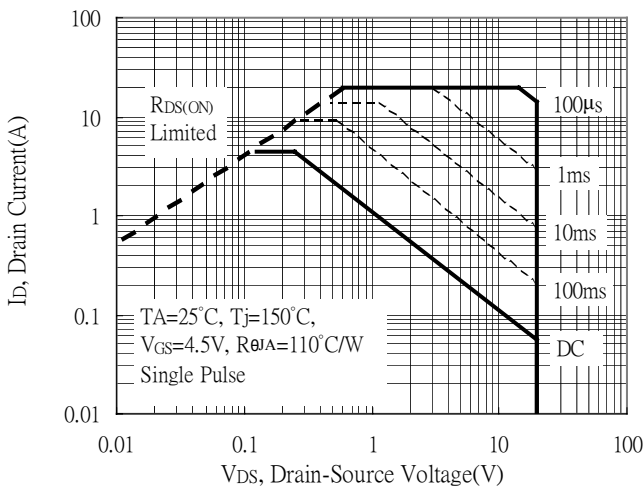


Maximum Drain Current vs Junction Temperature

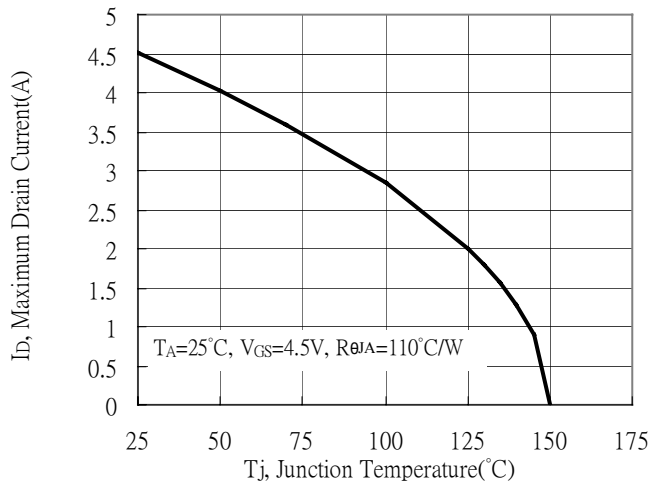


N-channel Typical Characteristics(Cont.)


Typical Transfer Characteristics

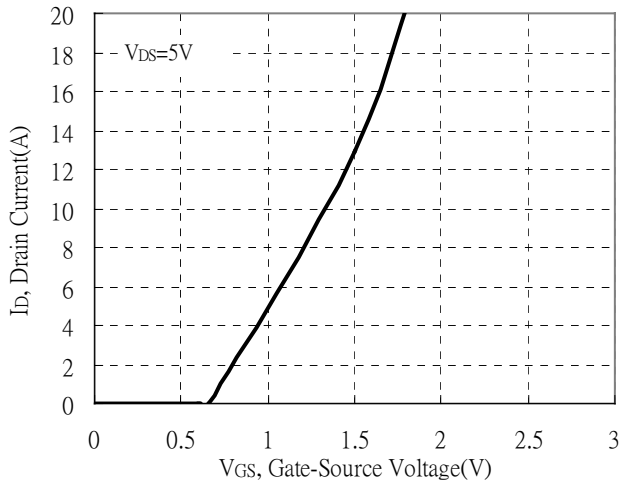


Power Derating Curve

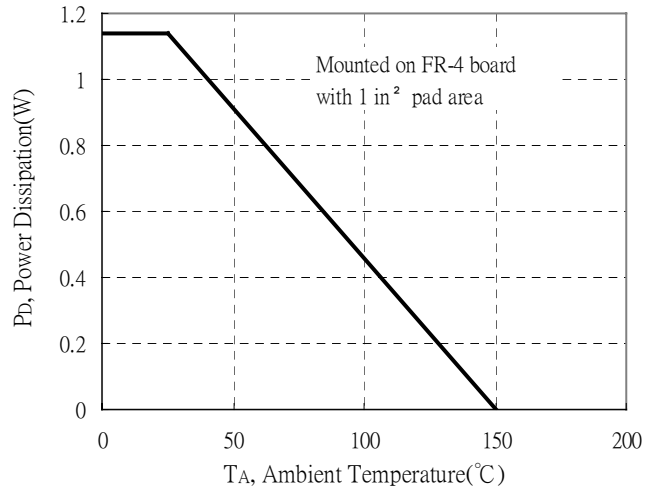

Transient Thermal Response Curves

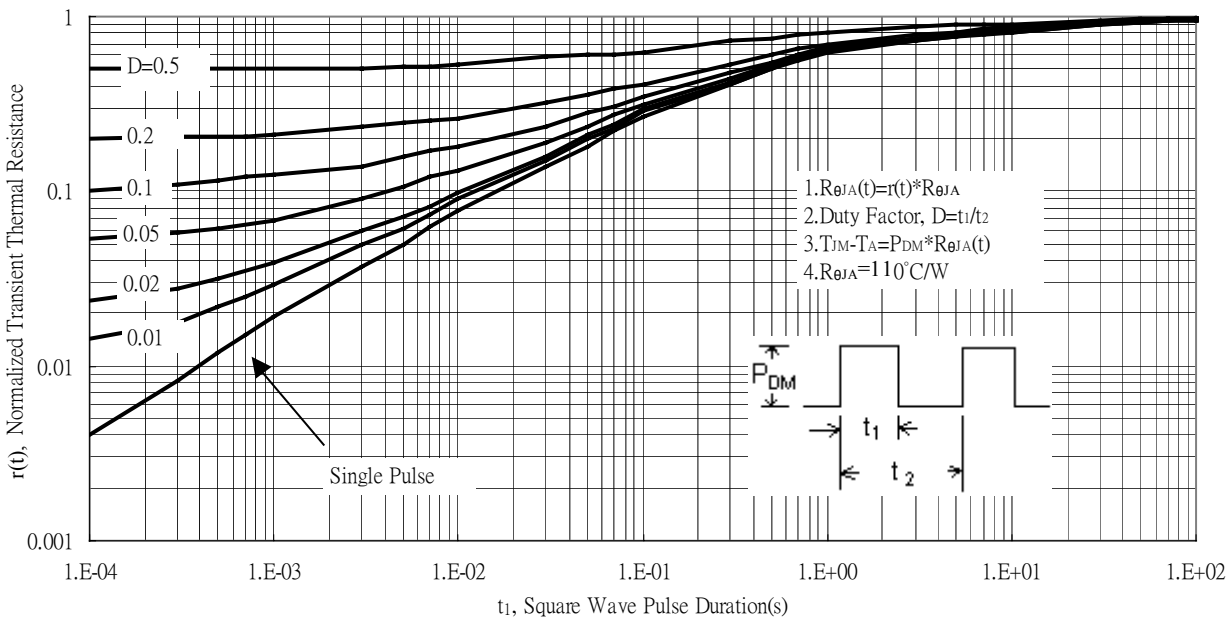


Forward Transfer Admittance vs Drain Current

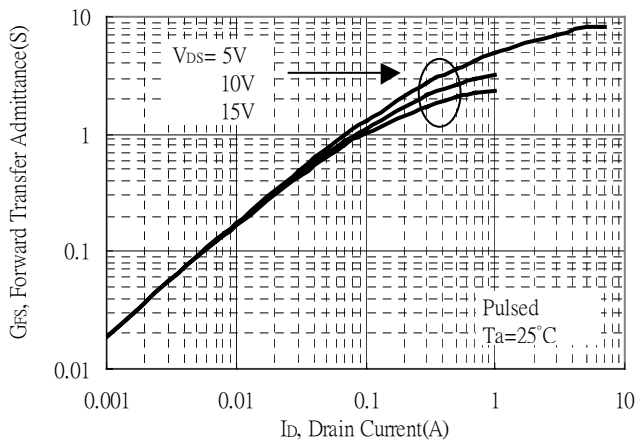


P-channel Typical Characteristics


Typical Output Characteristics

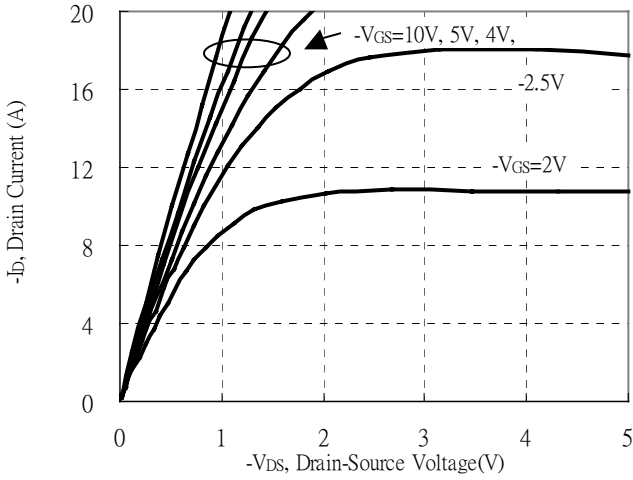


Brekdown Voltage vs Ambient Temperature

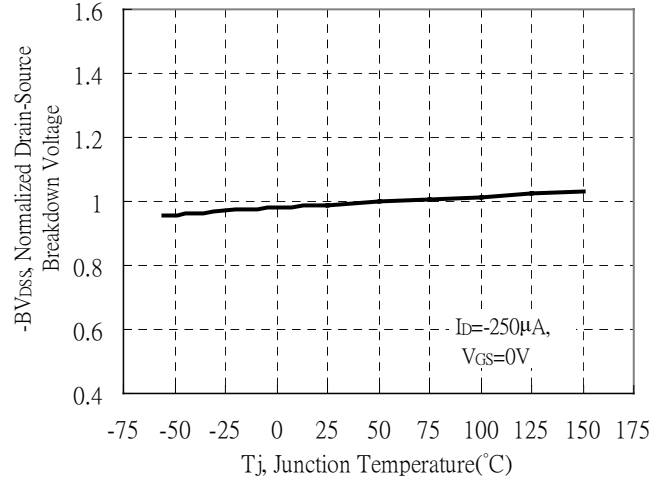


Static Drain-Source On-State resistance vs Drain Current

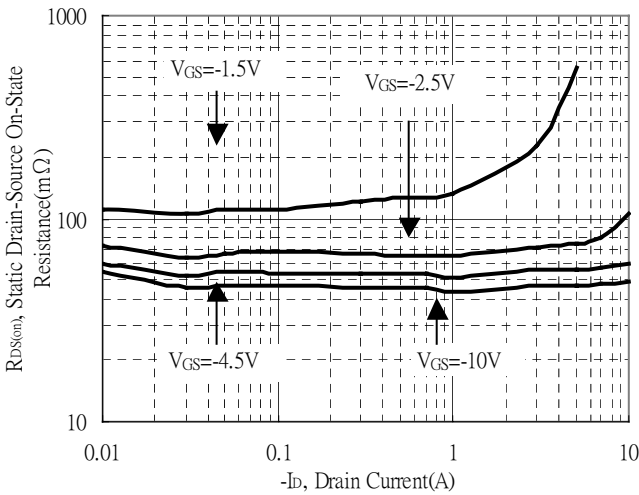


Reverse Drain Current vs Source-Drain Voltage

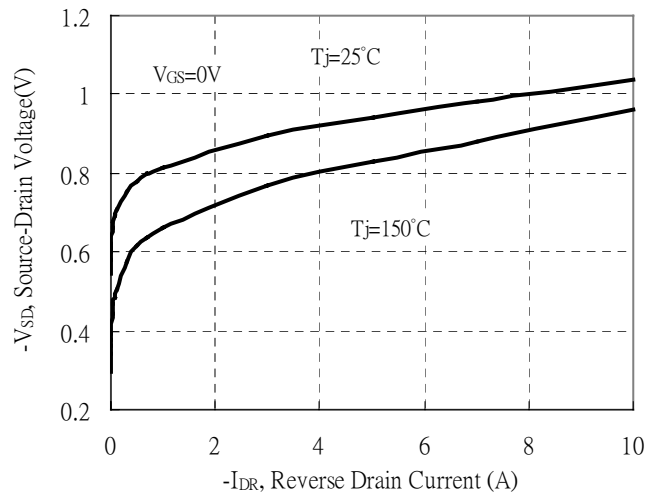

Static Drain-Source On-State Resistance vs Gate-Source Voltage

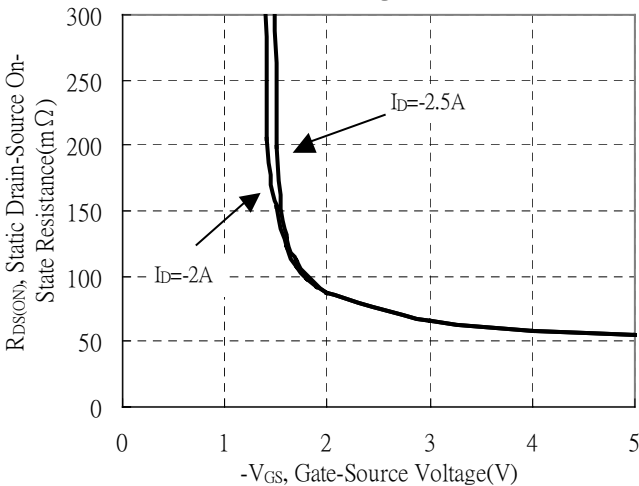


Drain-Source On-State Resistance vs Junction Temperature

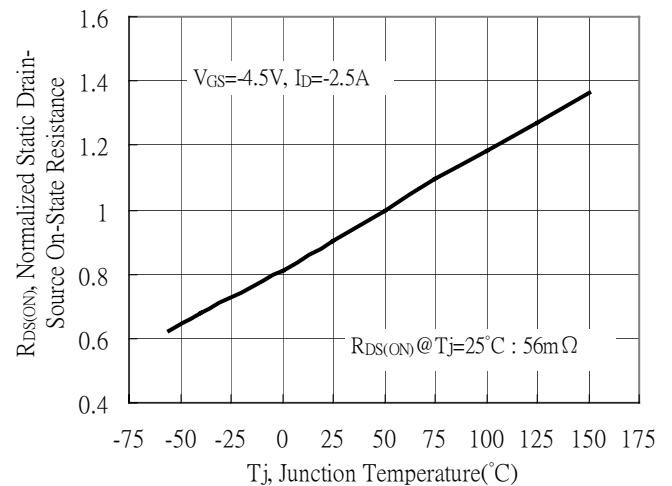


P-channel Typical Characteristics(Cont.)


Capacitance vs Drain-to-Source Voltage

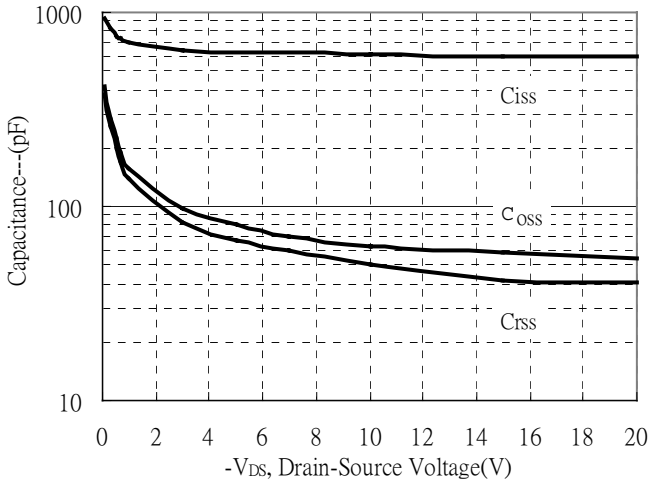


Threshold Voltage vs Junction Temperature

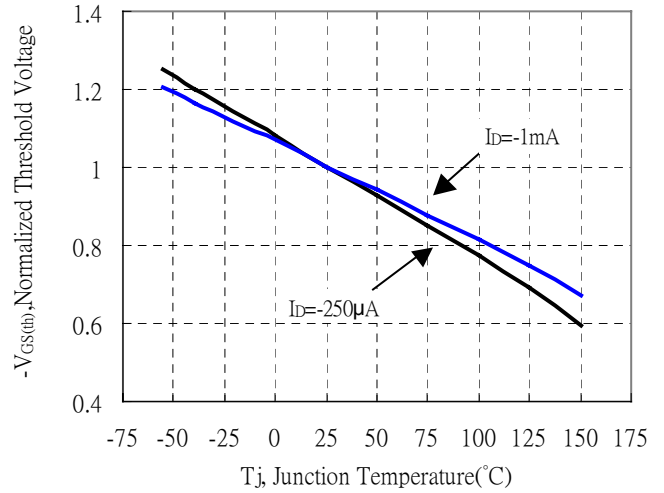


Single Pulse Power Rating, Junction to Ambient

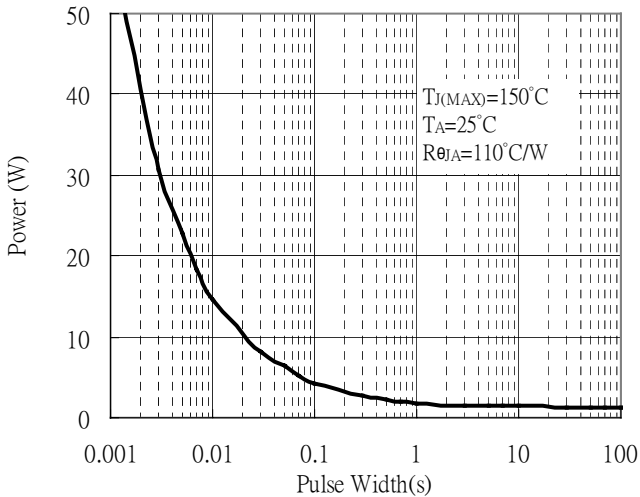


Gate Charge Characteristics

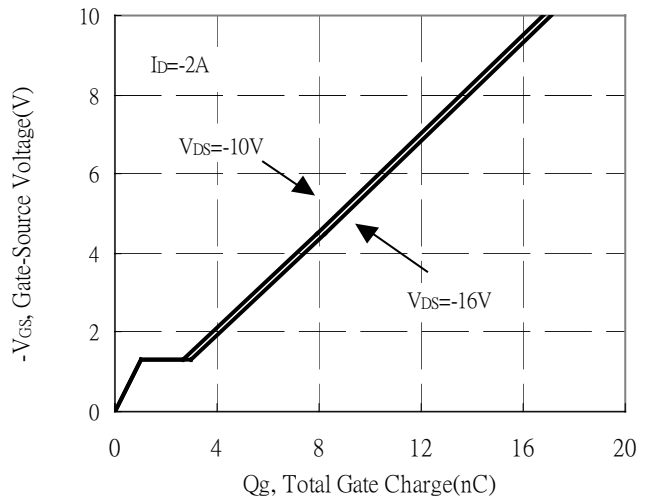

Maximum Safe Operating Area

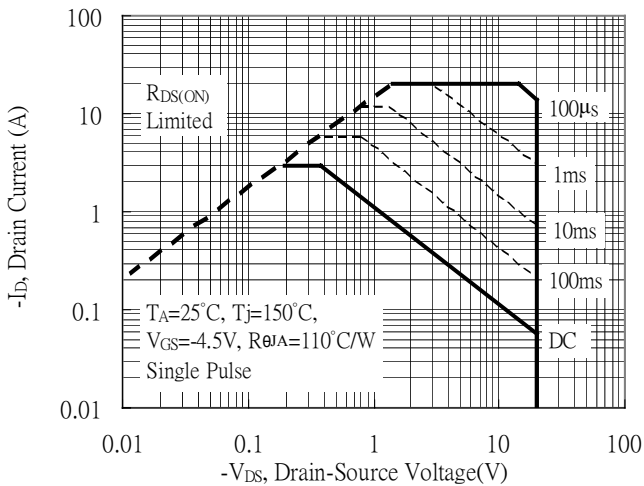


Maximum Drain Current vs Junction Temperature

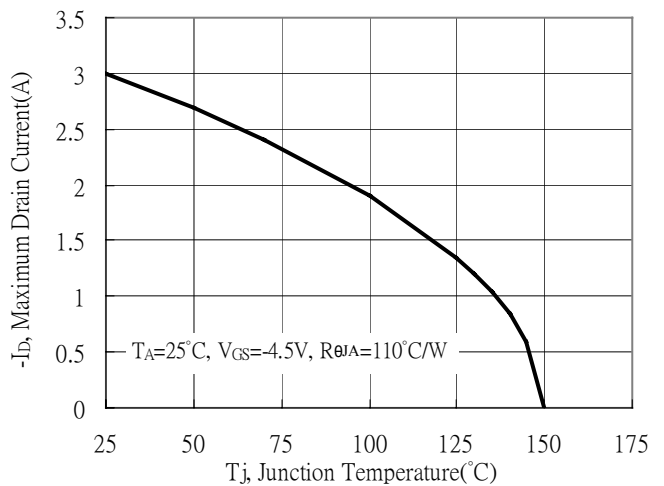


P-channel Typical Characteristics(Cont.)


Typical Transfer Characteristics

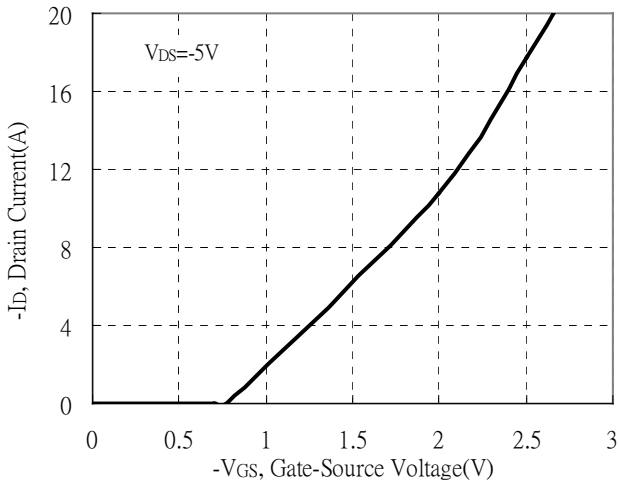


Power Derating Curve

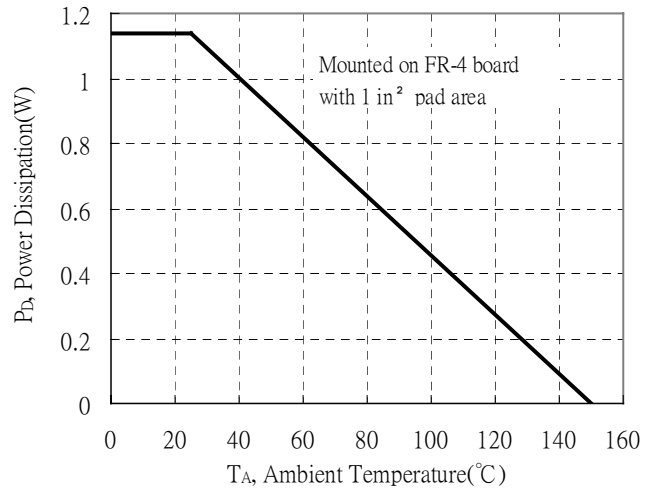


Transient Thermal Response Curves

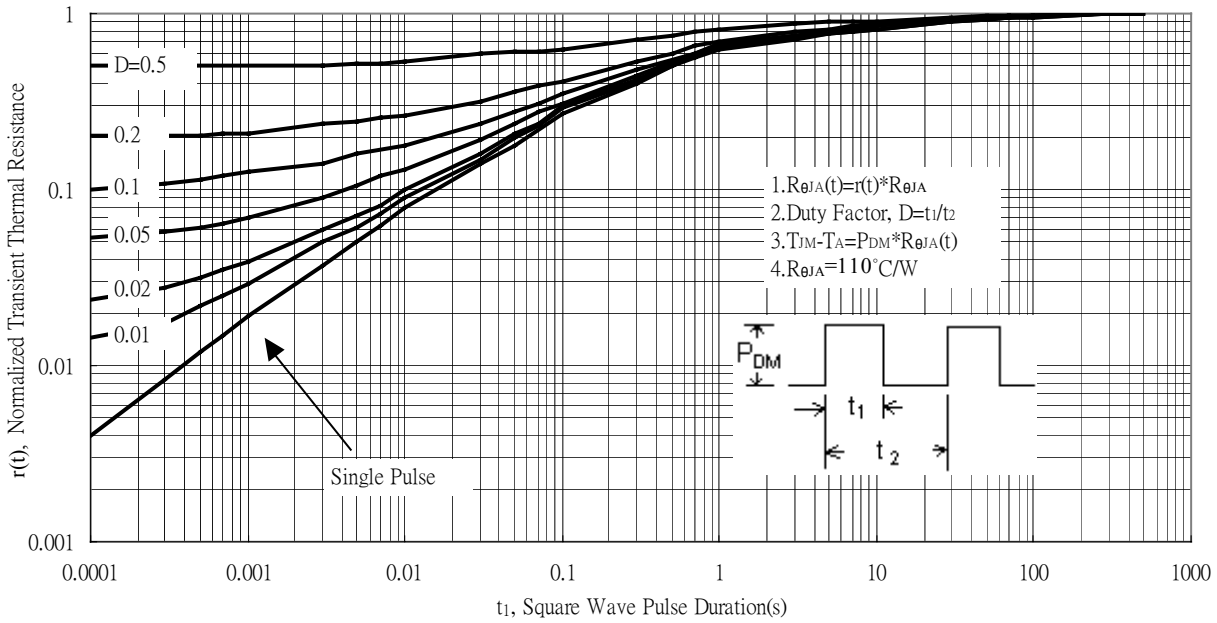


Forward Transfer Admittance vs Drain Current

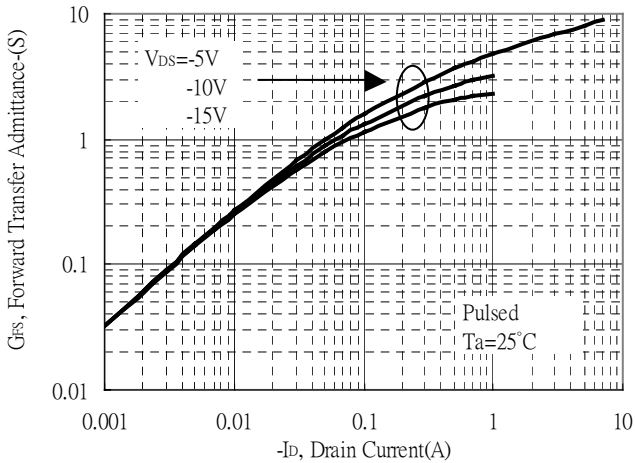


Recommended Soldering Footprint

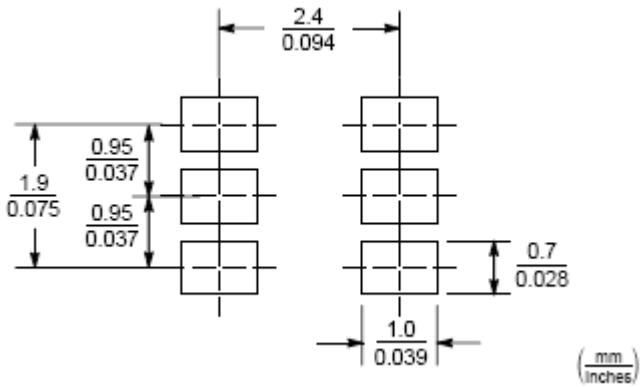

Reel Dimension

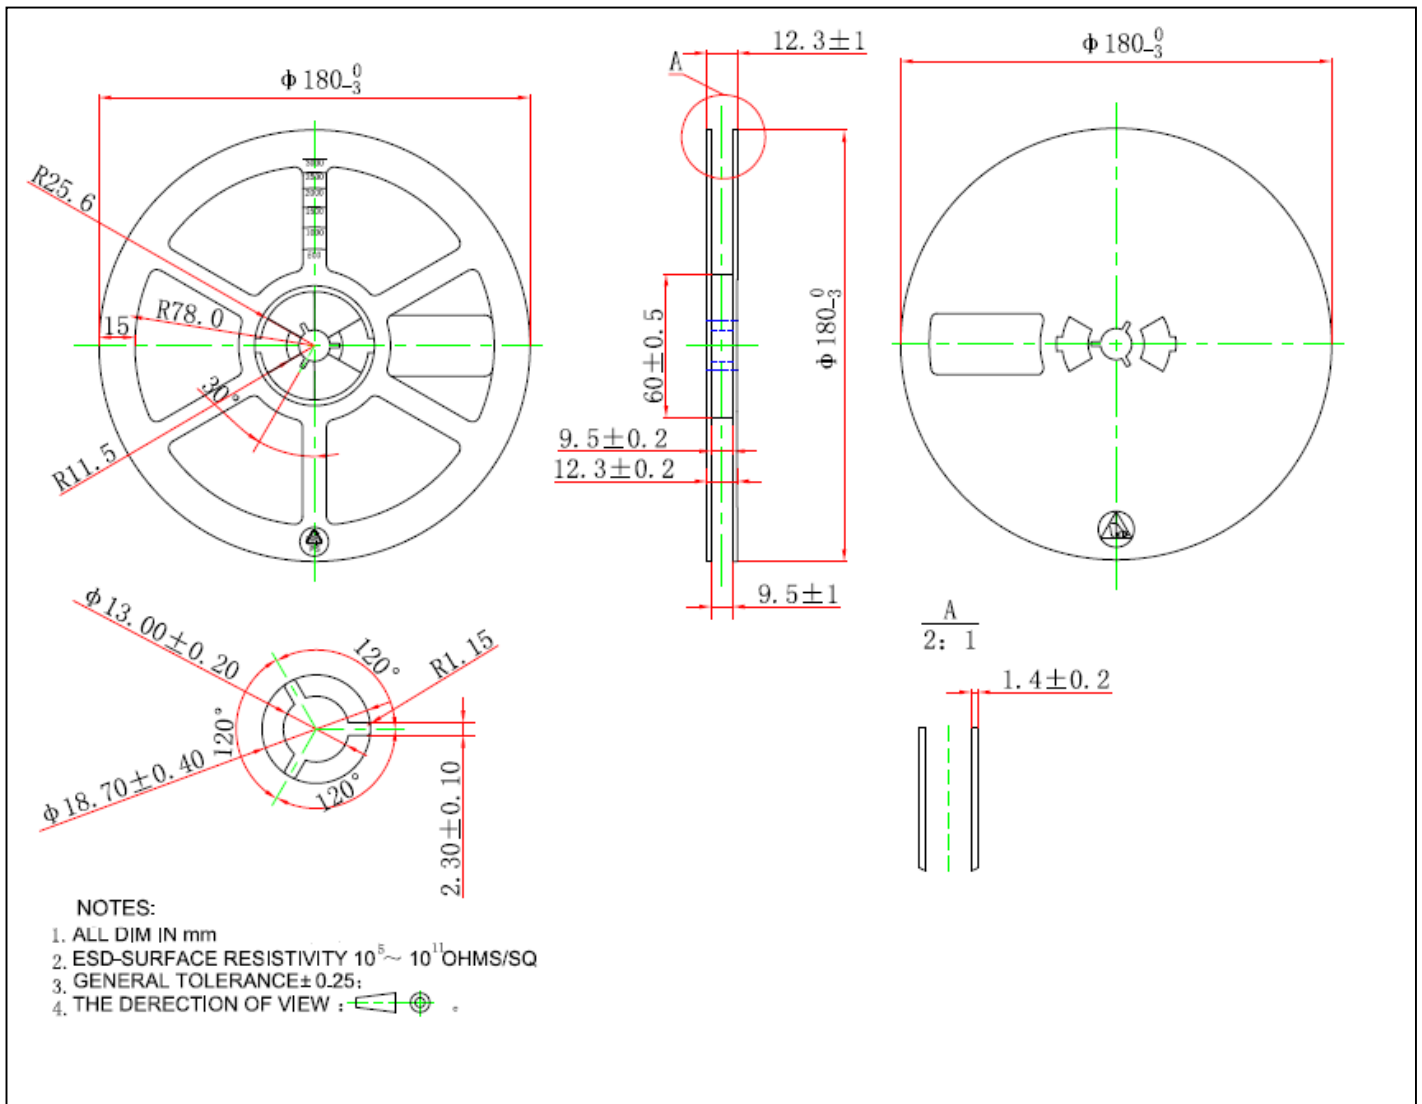


Carrier Tape Dimension

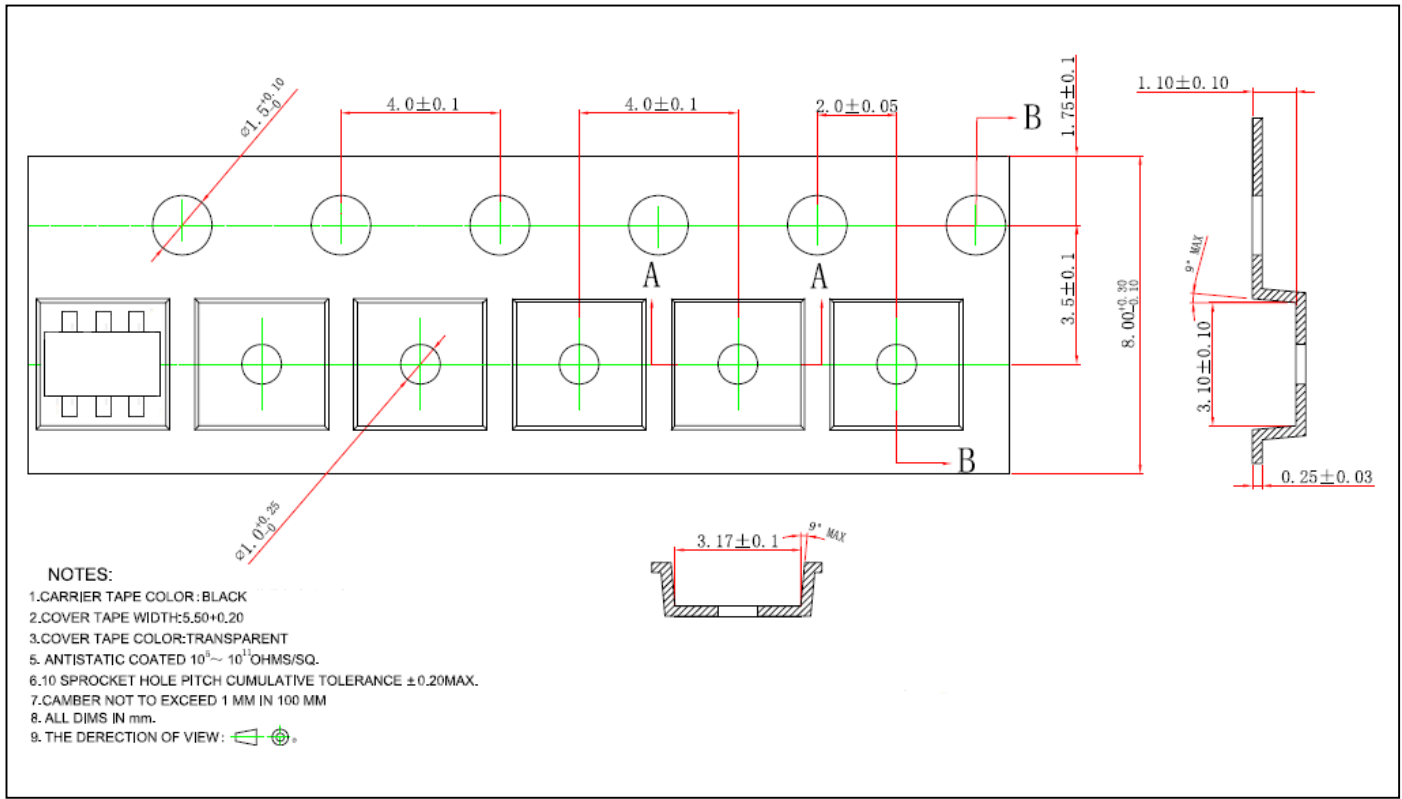

Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds


Recommended temperature profile for IR reflow

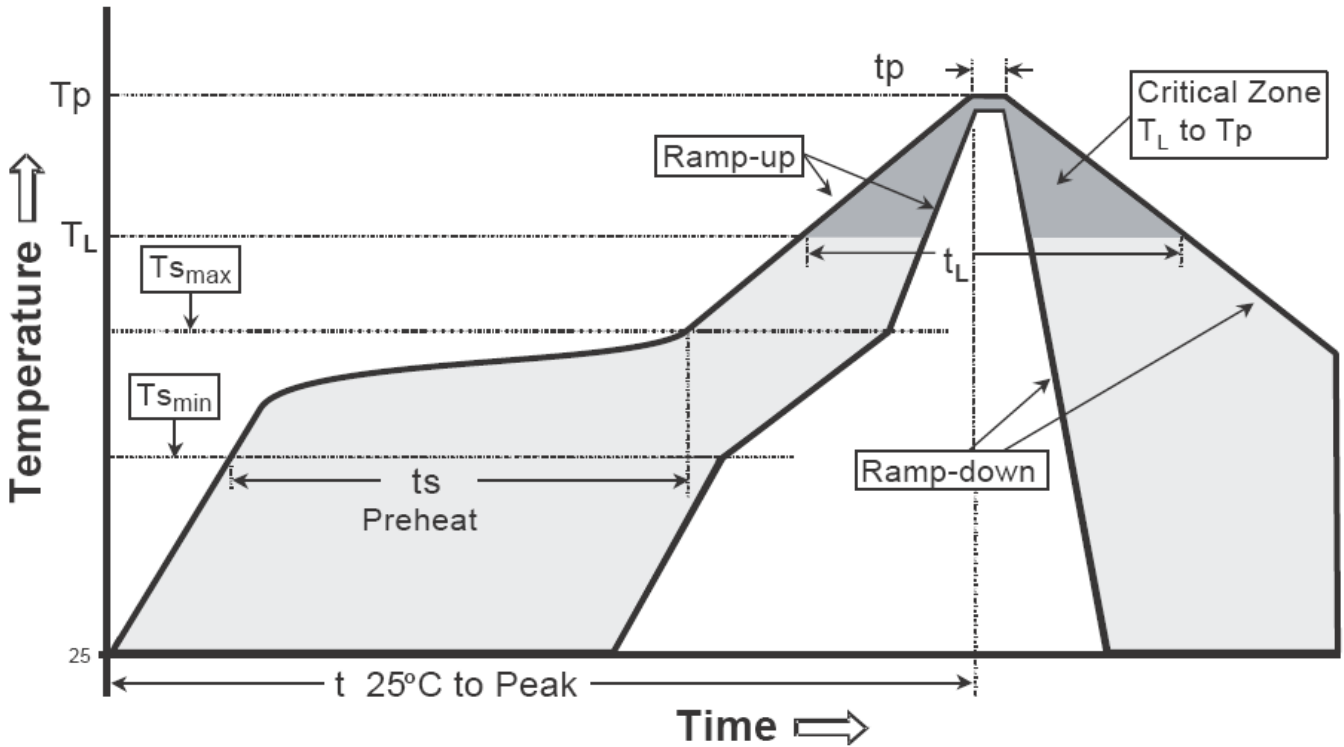

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (Tsmax to Tp)	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(Ts min)	100°C	150°C
-Temperature Max(Ts max)	150°C	200°C
-Time(ts min to ts max)	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (TL)	183°C	217°C
- Time (tL)	60-150 seconds	60-150 seconds
Peak Temperature(TP)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note :1. All temperatures refer to topside of the package, measured on the package body surface.
 2.For devices mounted on FR-4 PCB of 1.6mm or equivalent grade PCB. If other grade PCB is used, care should be taken to match the coefficients of thermal expansion between components and PCB. If they are not matched well, the solder joints may crack or the bodies of the parts may crack or shatter as the assembly cools.

TSOP-6 Dimension

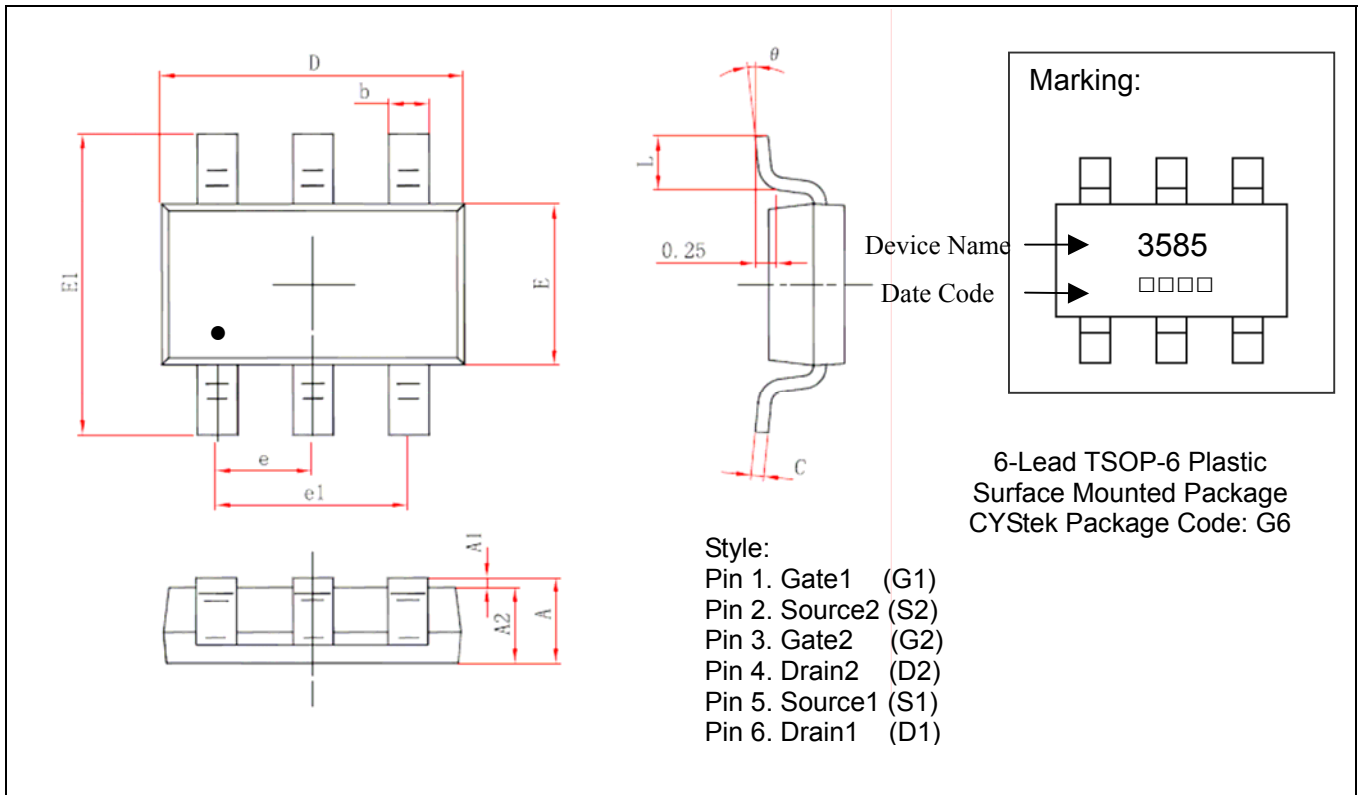

DIM	Millimeters		Inches		DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035	E	1.600	1.700	0.063	0.067
A1	0.000	0.100	0.000	0.004	E1	2.650	2.950	0.104	0.116
A2	0.700	0.800	0.028	0.031	e	0.950 (BSC)		0.037 (BSC)	
b	0.350	0.500	0.014	0.020	e1	1.900 (BSC)		0.075 (BSC)	
c	0.080	0.200	0.003	0.008	L	0.300	0.600	0.012	0.024
D	2.820	3.020	0.111	0.119	θ	0°	8°	0°	8°

Notes : 1.Controlling dimension : millimeters.
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material :

- Lead :Pure tin plated.
- Mold Compound : Epoxy resin family, flammability solid burning class:UL94V-0.

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.