

N-Channel Enhancement Mode Power MOSFET


MTE014N15RF3

BV_{DSS}	150V
$I_D@V_{GS}=10V, T_C=25^\circ C$	120A
$R_{DS(ON)}@V_{GS}=10V, I_D=20A$	14.4mΩ (typ)


Features

- Low Gate Charge
- Simple Drive Requirement
- Fast Switching Characteristic
- Pb-free lead plating and RoHS compliant package

Symbol

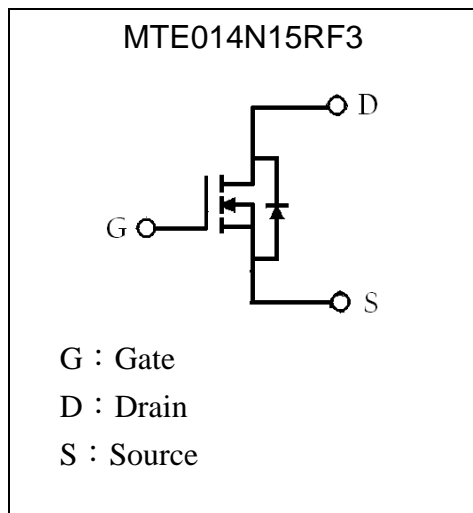


Outline

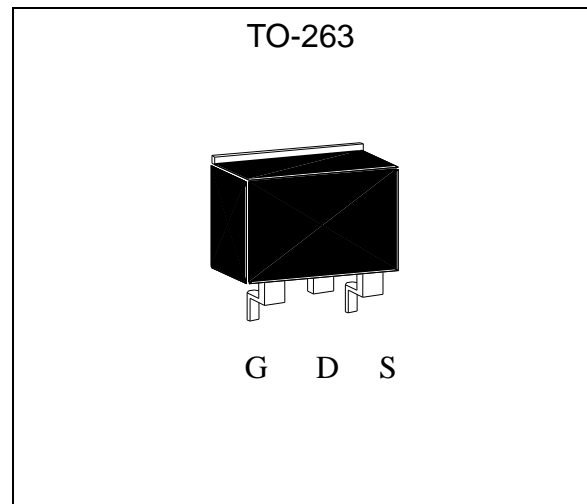

Ordering Information

Device	Package	Shipping
MTE014N15RF3-0-T7-X	TO-263 (Pb-free lead plating and RoHS compliant package)	800 pcs / Tape & Reel

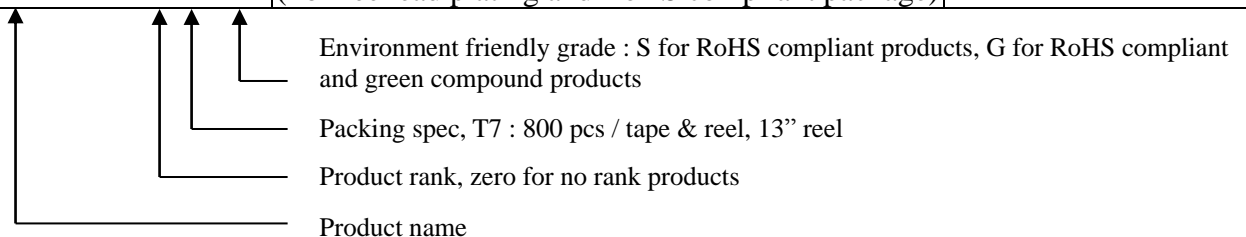



Absolute Maximum Ratings (Tc=25°C, unless otherwise noted)

Parameter	Symbol	Limits	Unit
Drain-Source Voltage	V _{DS}	150	V
Gate-Source Voltage	V _{GS}	±20	
Continuous Drain Current @ V _{GS} =10V, T _C =25°C	I _D	120	A
Continuous Drain Current @ V _{GS} =10V, T _C =125°C		85	
Pulsed Drain Current (Note 1)	I _{DM}	480	
Avalanche Current @ L=0.1mH	I _{AS}	85	
Avalanche Energy @ L=5mH, I _D =20A, V _{DD} =25V (Note 2)	E _{AS}	1000	mJ
Repetitive Avalanche Energy @ L=0.05mH	E _{AR}	37.5	
Total Power Dissipation (T _C =25°C)	P _D	375	W
Total Power Dissipation (T _C =100°C)		187	
Total Power Dissipation (T _A =25°C)		2.4	
Total Power Dissipation (T _A =100°C)		1.2	
Operating Junction and Storage Temperature	T _j , T _{stg}	-55~+175	°C

- Note : 1. Pulse width limited by maximum junction temperature
 2. 100% tested by conditions of L=0.1mH, I_{AS}=12A, V_{GS}=10V, V_{DD}=25V

Thermal Data

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-case, max	R _{θJC}	0.4	°C/W
Thermal Resistance, Junction-to-ambient, max	R _{θJA}	62.5	

Characteristics (Tc=25°C, unless otherwise specified)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static					
BV _{DSS}	150	-	-	V	V _{GS} =0V, I _D =250μA
ΔBV _{DSS} /ΔT _j	-	0.1	-	V/°C	Reference to 25°C, I _D =250μA
V _{GS(th)}	2.0	-	4.0	V	V _{DS} = V _{GS} , I _D =250μA
G _{FS}	-	28.2	-	S	V _{DS} =10V, I _D =20A
I _{GSS}	-	-	±100	nA	V _{GS} =±20V, V _{DS} =0V
I _{DSS}	-	-	1	μA	V _{DS} =120V, V _{GS} =0V
	-	-	25		V _{DS} =100V, V _{GS} =0V, T _j =125°C
*R _{DS(ON)}	-	14.4	19.5	mΩ	V _{GS} =10V, I _D =20A
Dynamic					
*Q _g	-	62.8	-	nC	I _D =20A, V _{DS} =75V, V _{GS} =10V
*Q _{gs}	-	17.2	-		
*Q _{gd}	-	15.9	-		




*td(ON)	-	33	-	ns	V _{DS} =75V, I _D =20A, V _{GS} =10V, R _G =1Ω
*tr	-	27	-		
*td(OFF)	-	65.4	-		
*tf	-	13.4	-		
Ciss	-	3798	-	pF	V _{GS} =0V, V _{DS} =75V, f=1MHz
Coss	-	240	-		
Crss	-	12	-		
Rg	-	1.5	-	Ω	f=1MHz
Source-Drain Diode					
*Is	-	-	94	A	
*ISM	-	-	320		
*VSD	-	0.78	1.2	V	Is=10A, VGS=0V
*trr	-	72	-	ns	IF=10A, VGS=0V, dIF/dt=100A/μs
*Qrr	-	212	-	nC	


*Pulse Test : Pulse Width ≤300μs, Duty Cycle≤2%

Typical Characteristics


Typical Output Characteristics

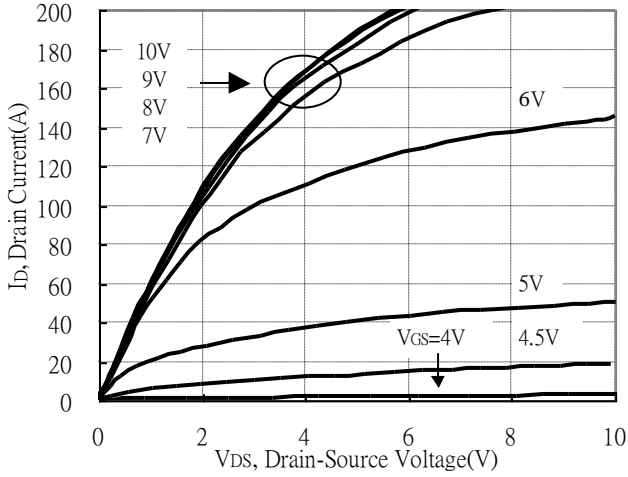


Brekdown Voltage vs Junction Temperature

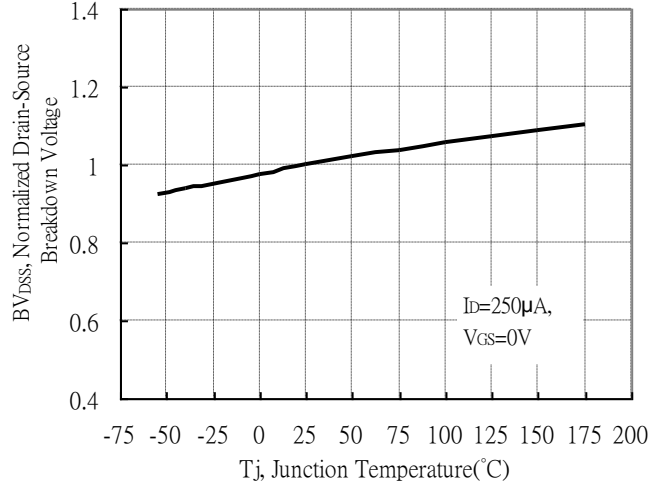


Static Drain-Source On-State resistance vs Drain Current

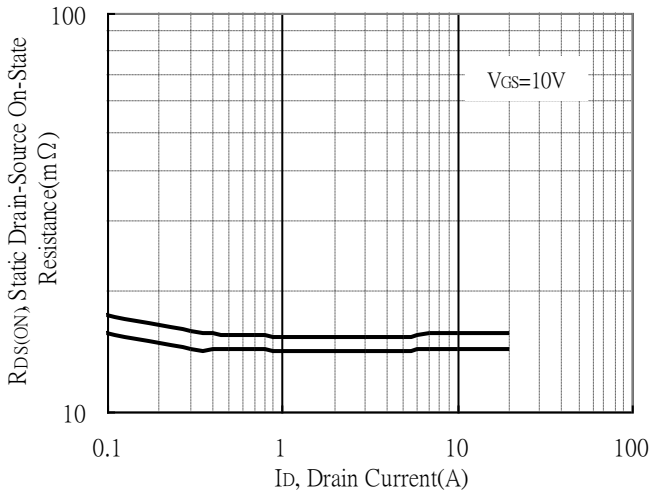


Reverse Drain Current vs Source-Drain Voltage

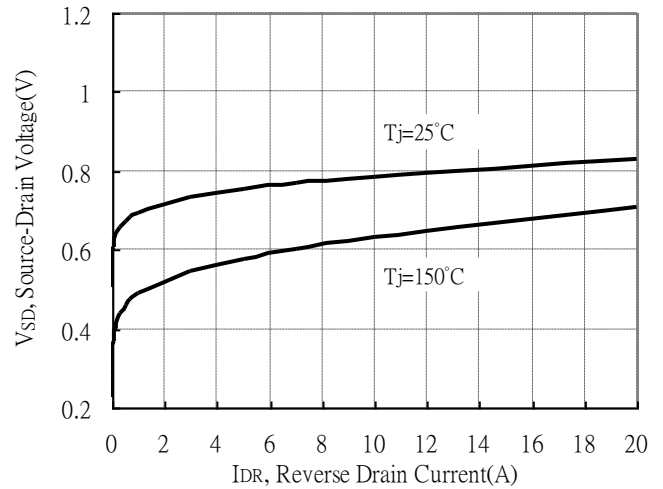

Static Drain-Source On-State Resistance vs Gate-Source Voltage

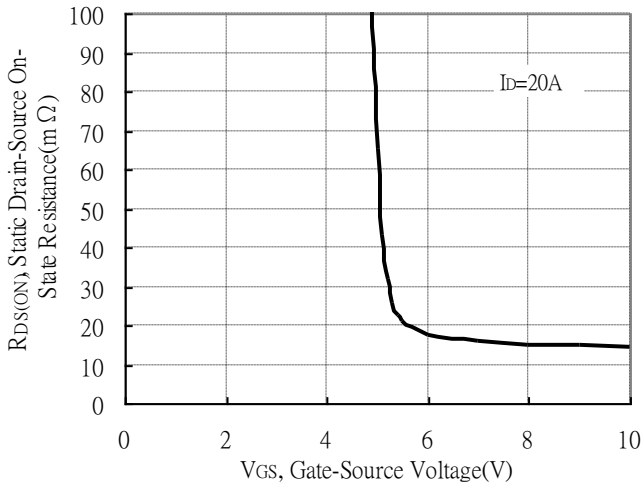


Drain-Source On-State Resistance vs Junction Temperature

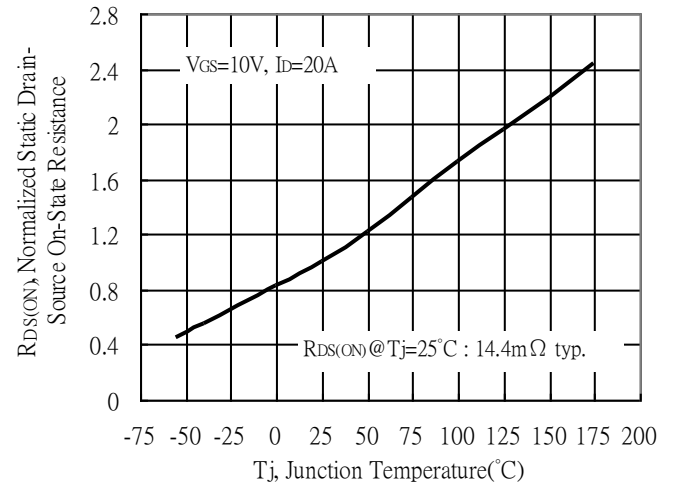


Typical Characteristics(Cont.)


Capacitance vs Drain-to-Source Voltage

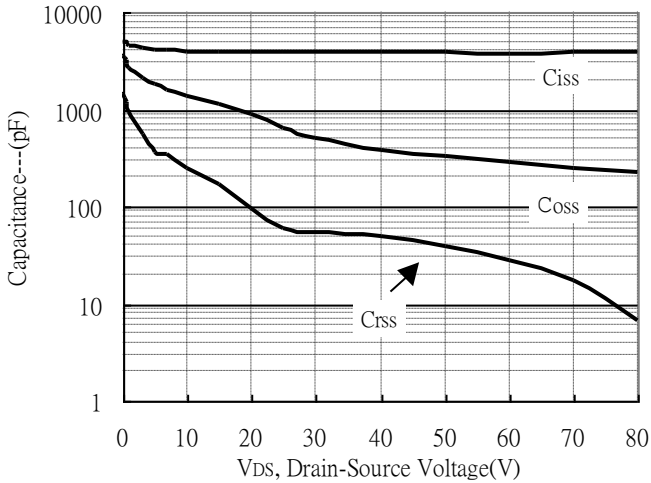


Threshold Voltage vs Junction Temperature

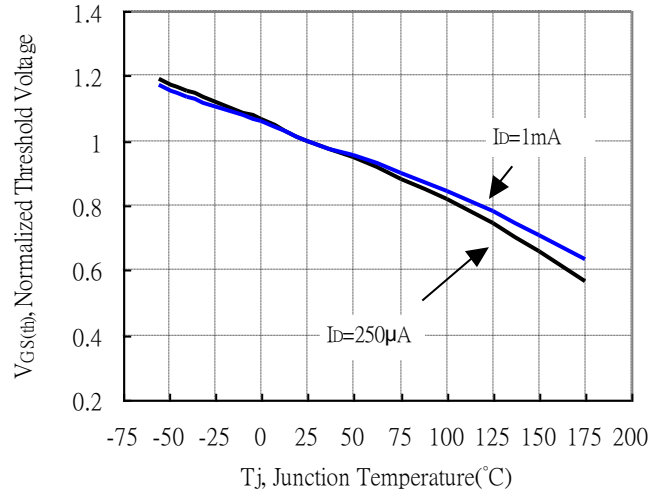


Forward Transfer Admittance vs Drain Current

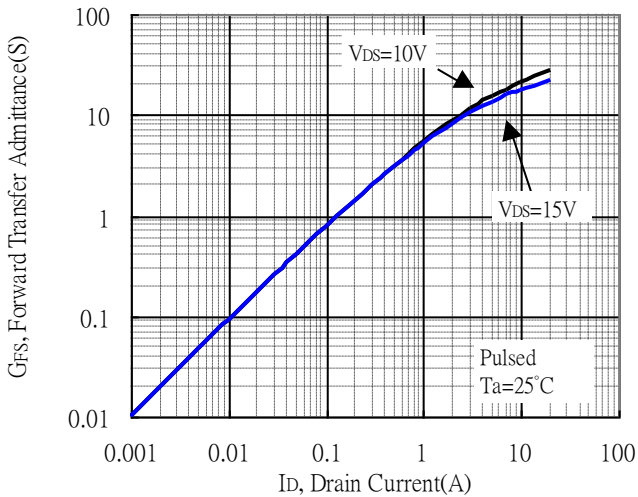


Gate Charge Characteristics

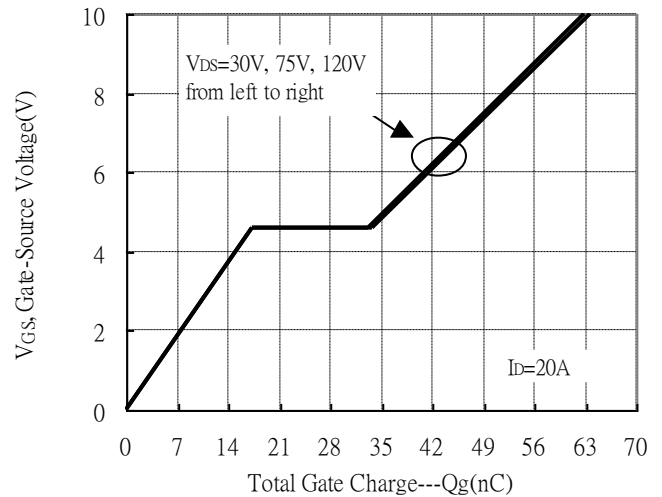

Maximum Safe Operating Area

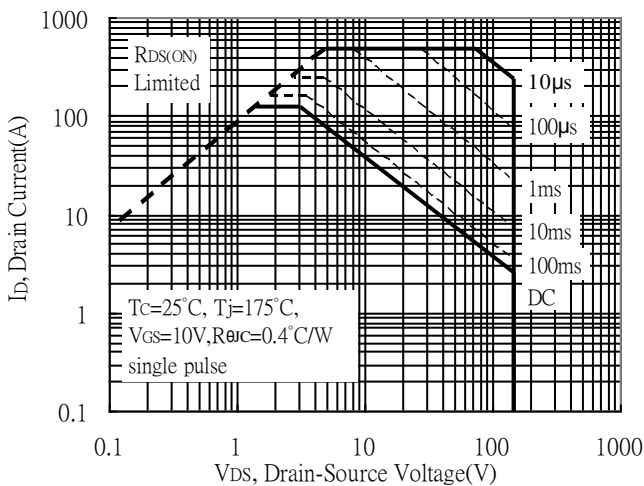


Maximum Drain Current vs Case Temperature

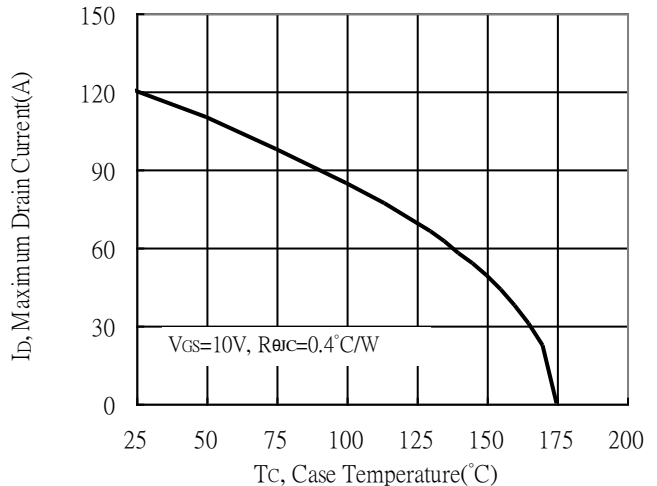




Typical Characteristics(Cont.)


Typical Transfer Characteristics

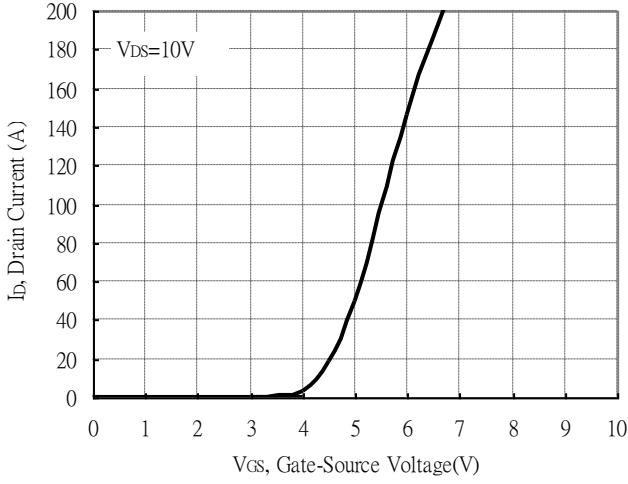


Single Pulse Maximum Power Dissipation

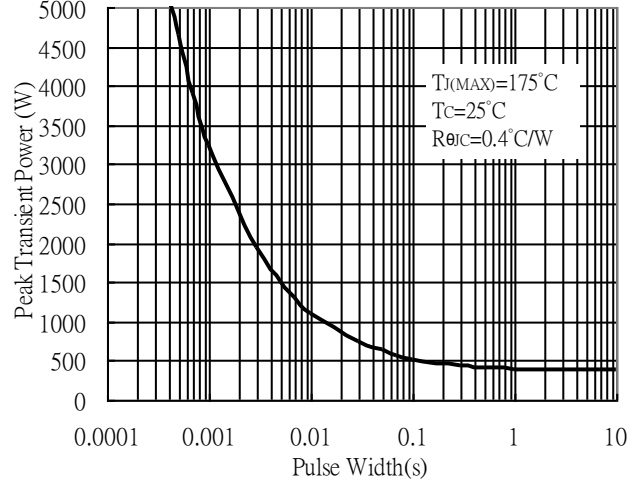


Transient Thermal Response Curves

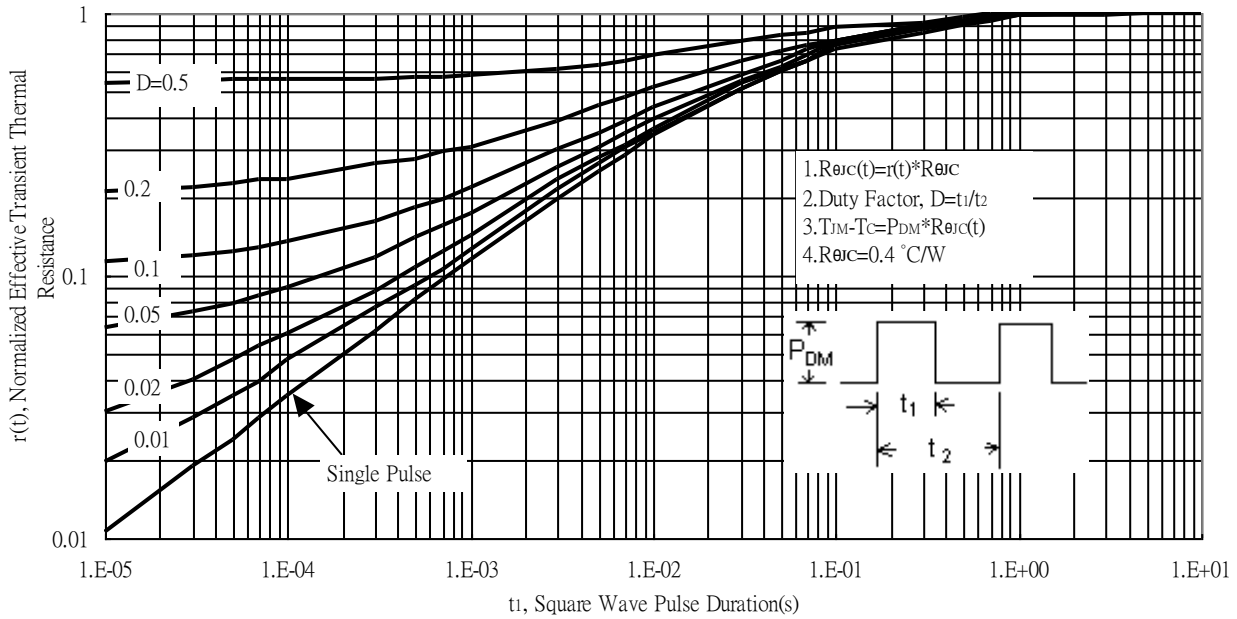

Reel Dimension

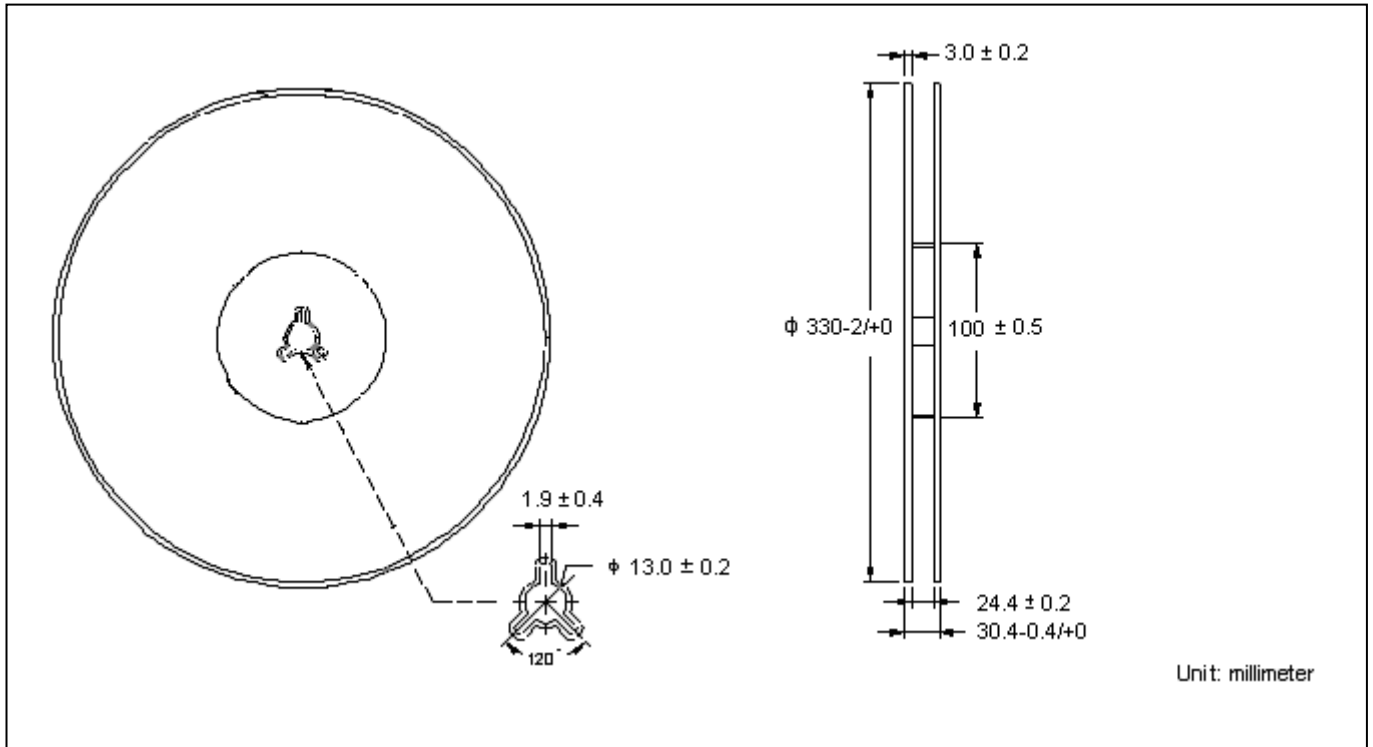


Carrier Tape Dimension

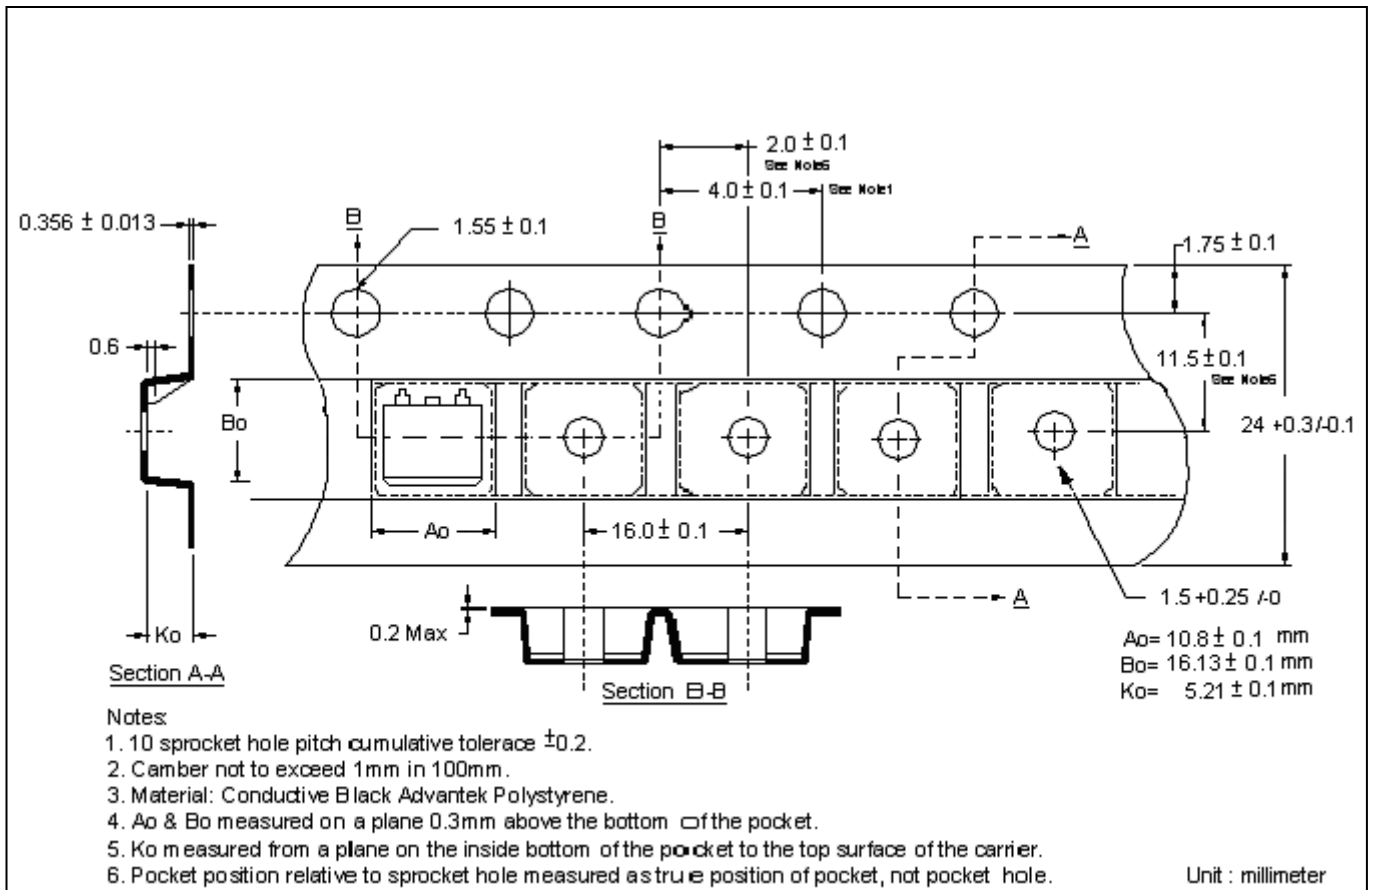

Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds


Recommended temperature profile for IR reflow

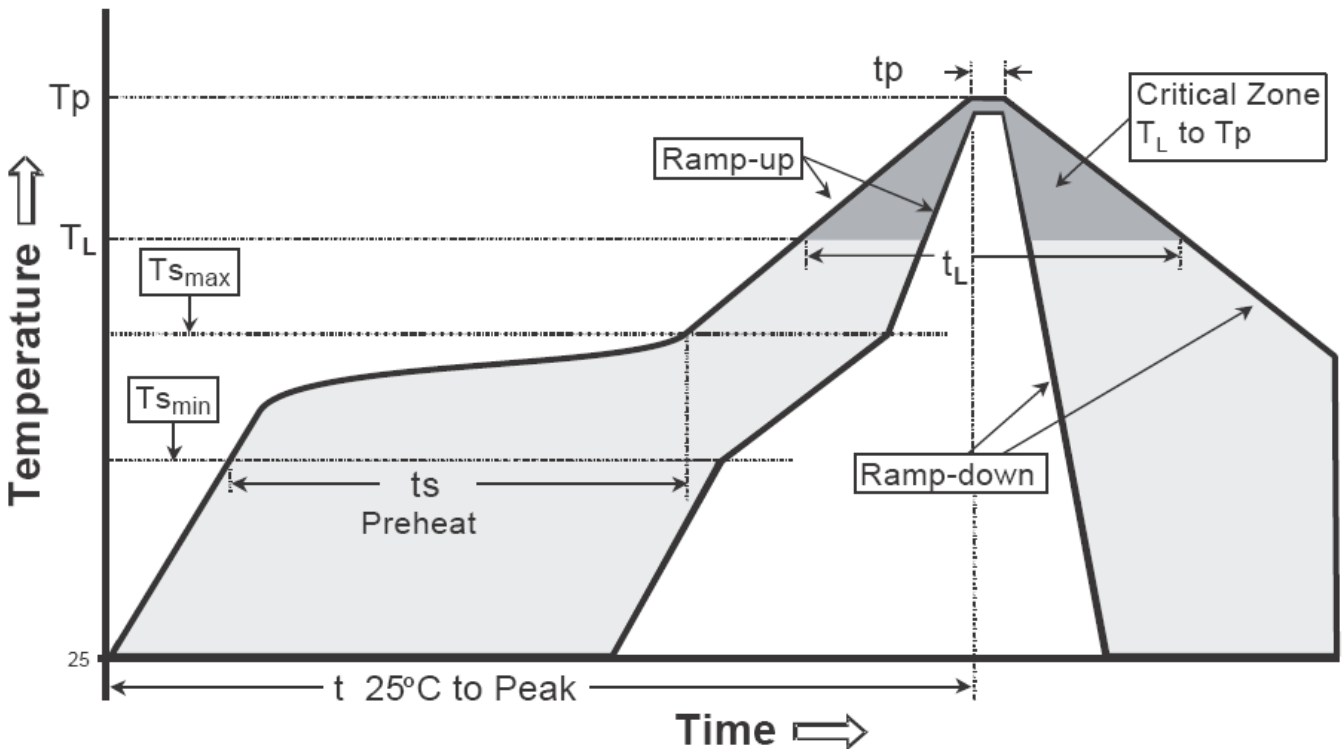


Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (Tsmax to Tp)	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(Ts min)	100°C	150°C
-Temperature Max(Ts max)	150°C	200°C
-Time(ts min to ts max)	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (Tl)	183°C	217°C
- Time (tl)	60-150 seconds	60-150 seconds
Peak Temperature(TP)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

TO-263 Dimension

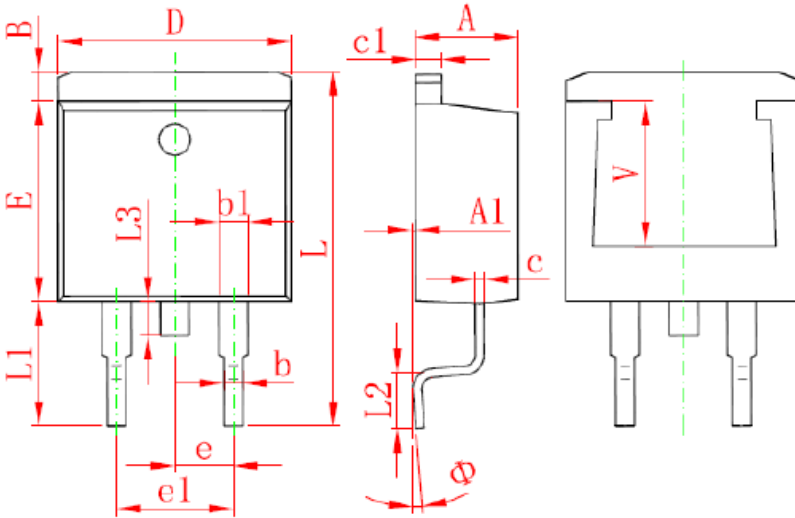

Marking :



Device Name → E014
 N15R
 Date Code → □□□□

1 2 3

Style : Pin 1.Gate 2.Drain
 3.Source

3-Lead Plastic Surface Mounted Package
CYStek Package Code : F3

Date Code : (From left to right)
 First Code : Year code, the last digit of Christnr year. For example, 2014→4, 2015→, 2016→6, ..., etc.
 Second Code : Month code, Jan→A, Feb→B, Mar→C, Apr→D, May→E, Jun→F, Jul→G, Aug→H, Sep→J,
 Oct→K, Nov→L, Dec→M
 Third and fourth codes : production serial number, 01~99

DIM	Millimeters		Inches		DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	4.470	4.670	0.176	0.184	e	2.540 TYP		0.100 TYP	
A1	0.000	0.150	0.000	0.006	e1	4.980	5.180	0.196	0.204
B	1.120	1.420	0.044	0.056	L	14.940	15.500	0.588	0.610
b	0.710	0.910	0.028	0.036	L1	4.950	5.450	0.195	0.215
b1	1.170	1.370	0.046	0.054	L2	2.340	2.740	0.092	0.108
c	0.310	0.530	0.012	0.021	L3	1.300	1.700	0.051	0.067
c1	1.170	1.370	0.046	0.054	Φ	0°	8°	0°	8°
D	10.010	10.310	0.394	0.406	V	6.400 REF		0.253 REF	
E	8.500	8.900	0.335	0.350					

Notes : 1.Controlling dimension : millimeters.
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material :

- Lead : Pure tin plated.
- Mold Compound : Epoxy resin family, flammability solid burning class:UL94V-0.

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.