

N-Channel Enhancement Mode Power MOSFET


MTE3D0N10RF3

Features


- Low On Resistance
- Low Gate Charge
- Fast Switching Characteristic

| | |
|---|-------|
| BV_{DSS} | 100V |
| $I_D@V_{GS}=10V, T_C=25^\circ C$ | 130A |
| $I_D@V_{GS}=10V, T_A=25^\circ C$ | 24A |
| $R_{DS(ON) typ. @ V_{GS}=10V, I_D=20A}$ | 3.2mΩ |

Equivalent Circuit

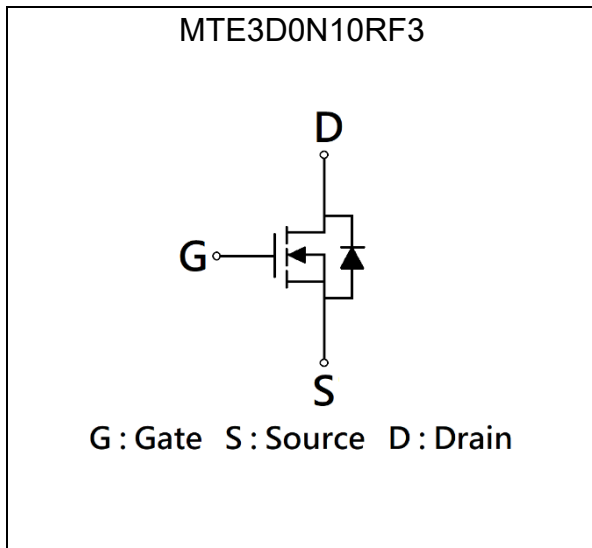


Outline

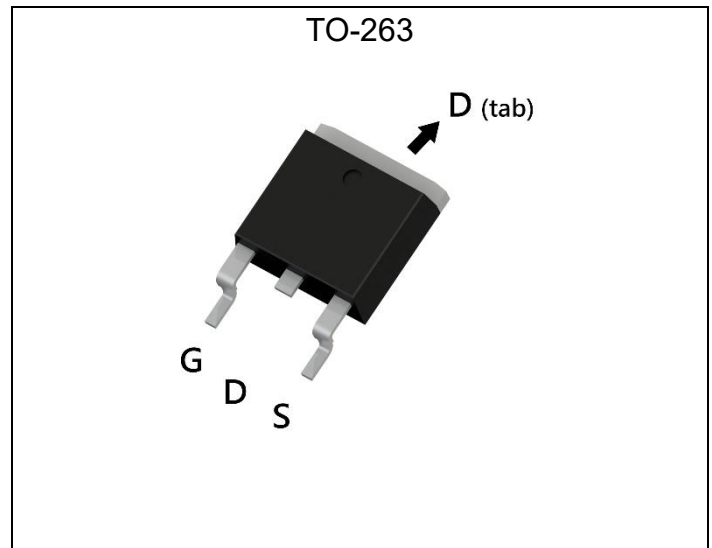

Ordering Information

| Device | Package | Shipping |
|---------------------|---|-----------------------|
| MTE3D0N10RF3-0-T7-G | TO-263 (Pb-free lead plating and RoHS compliant package) | 800 pcs / Tape & Reel |

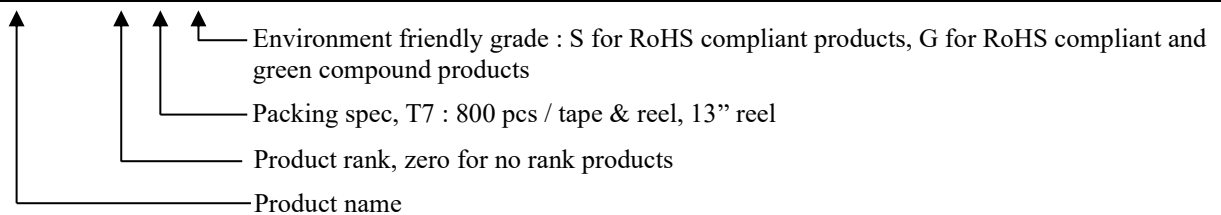

**Absolute Maximum Ratings (T_A=25°C)**

| Parameter | Symbol | Limits | Unit |
|--|-----------------------------------|-----------------|------|
| Drain-Source Voltage | V _{DS} | 100 | V |
| Gate-Source Voltage | V _{GS} | ±20 | |
| Continuous Drain Current @ V _{GS} =10V, T _C =25°C (silicon limit) *a | I _D | 152 | A |
| Continuous Drain Current @ V _{GS} =10V, T _C =25°C (package limit) *a | | 130 | |
| Continuous Drain Current @ V _{GS} =10V, T _C =100°C *a | | 96 | |
| Continuous Drain Current @ V _{GS} =10V, T _A =25°C *b | | 24 | |
| Continuous Drain Current @ V _{GS} =10V, T _A =70°C *b | | 19 | |
| Pulsed Drain Current *c | | I _{DM} | |
| Continuous Body Diode Forward Current @ T _C =25°C *a | I _S | 130 | mJ |
| Pulsed Body Diode Forward Current @ T _C =25°C *a | I _{SM} | 520 | |
| Avalanche Current @ L=0.1mH | I _{AS} | 40 | |
| Avalanche Energy @ L=0.5mH | E _{AS} | 100 | W |
| Total Power Dissipation | T _C =25°C *a | 167 | |
| | T _C =100°C *a | 67 | |
| | T _A =25°C *b | 4.2 | |
| | T _A =70°C *b | 2.7 | |
| Operating Junction and Storage Temperature Range | T _J , T _{stg} | -55~+150 | °C |

Thermal Data

| Parameter | Symbol | Steady State | Unit |
|--|------------------|--------------|------|
| Thermal Resistance, Junction-to-case | R _{θJC} | 0.75 | °C/W |
| Thermal Resistance, Junction-to-ambient *b | R _{θJA} | 30 | |

Note:

- *a. The power dissipation P_D is based on T_{J(MAX)}=150°C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.
- *b. The value of R_{θJA} is measured with the device mounted on 1 in² FR-4 board with 2 oz. copper, in a still air environment with T_A=25°C. The power dissipation P_D is based on R_{θJA} and the maximum allowed junction temperature of 150°C. The value in any given application depends on the user's specific board design.
- *c. Repetitive rating, pulse width limited by junction temperature T_{J(MAX)}=150°C. Ratings are based on low frequency and low duty cycles to keep initial T_J=25°C.



Electrical Characteristics (T_A=25°C, unless otherwise specified)

| Symbol | Min. | Typ. | Max. | Unit | Test Conditions |
|---------------------------|------|------|------|------|--|
| Static | | | | | |
| BV _{DSS} | 100 | - | - | V | V _{GS} =0V, I _D =250μA |
| V _{GS(th)} | 2 | - | 4 | | V _{DS} =V _{GS} , I _D =250μA |
| G _{FS} | - | 43 | - | S | V _{DS} =5V, I _D =20A |
| I _{GSS} | - | - | ±100 | nA | V _{GS} =±20V, V _{DS} =0V |
| I _{DSS} | - | - | 1 | μA | V _{DS} =80V, V _{GS} =0V |
| R _{DS(ON)} | - | 3.2 | 4 | mΩ | V _{GS} =10V, I _D =20A |
| Dynamic | | | | | |
| C _{iss} | - | 6200 | - | pF | V _{DS} =50V, V _{GS} =0V, f=1MHz |
| C _{oss} | - | 860 | - | | |
| C _{rss} | - | 40 | - | | |
| R _g | - | 0.9 | - | Ω | f=1MHz |
| Q _g *1, 2 | - | 90 | - | nC | V _{DS} =50V, I _D =20A, V _{GS} =10V |
| Q _{gs} *1, 2 | - | 30 | - | | |
| Q _{gd} *1, 2 | - | 20 | - | | |
| t _{d(ON)} *1, 2 | - | 42 | - | ns | V _{DS} =50V, I _D =20A, V _{GS} =10V, R _{GS} =1.6Ω |
| t _r *1, 2 | - | 25 | - | | |
| t _{d(OFF)} *1, 2 | - | 75 | - | | |
| t _f *1, 2 | - | 20 | - | | |
| Source-Drain Diode | | | | | |
| V _{SD} *1 | - | 0.8 | 1.2 | V | I _S =20A, V _{GS} =0V |
| t _{rr} | - | 63 | - | ns | I _F =20A, dI _F /dt=100A/μs |
| Q _{rr} | - | 135 | - | nC | |

Note:


*1. Pulse Test : Pulse Width ≤300μs, Duty Cycle≤2%

*2. Independent of operating temperature




Typical Characteristics


Typical Output Characteristics

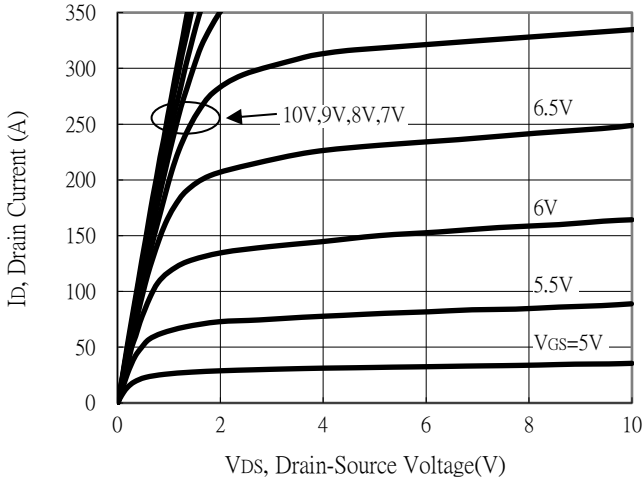


Breakdown Voltage vs Ambient Temperature

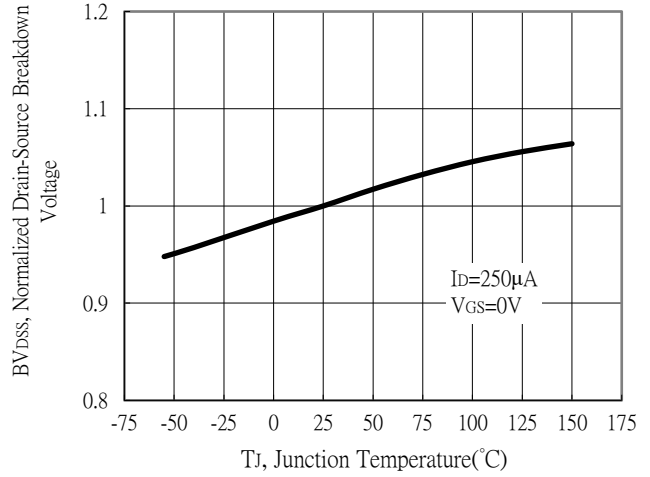


Static Drain-Source On-State resistance vs Drain Current

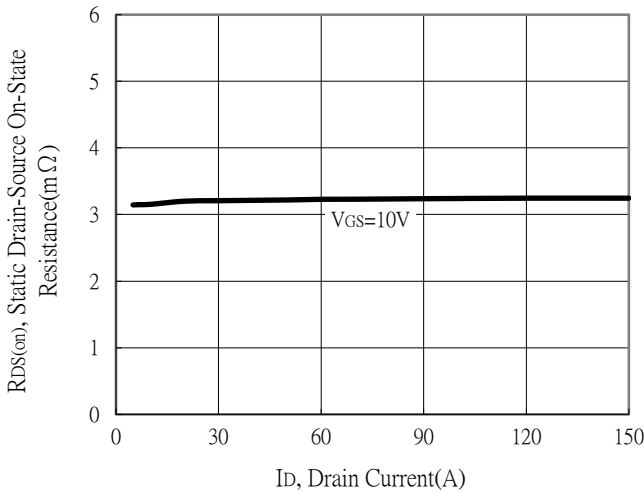


Body Diode Current vs Source-Drain Voltage

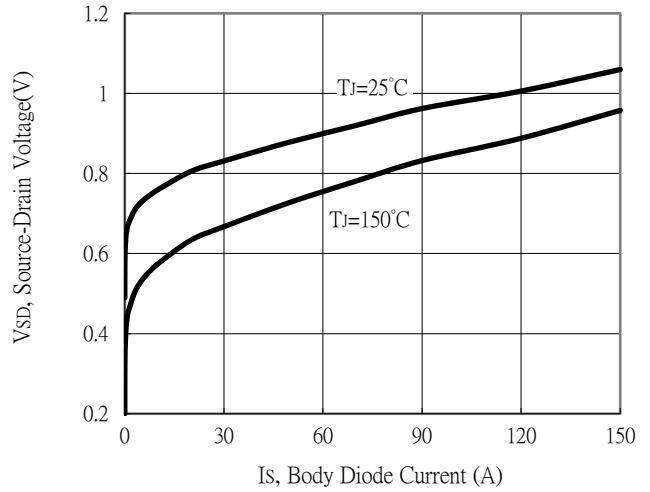

Static Drain-Source On-State Resistance vs Gate-Source Voltage

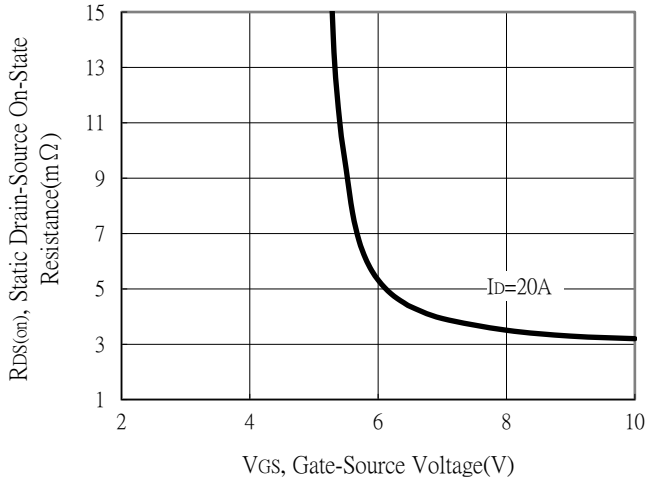


Drain-Source On-State Resistance vs Junction Temperature

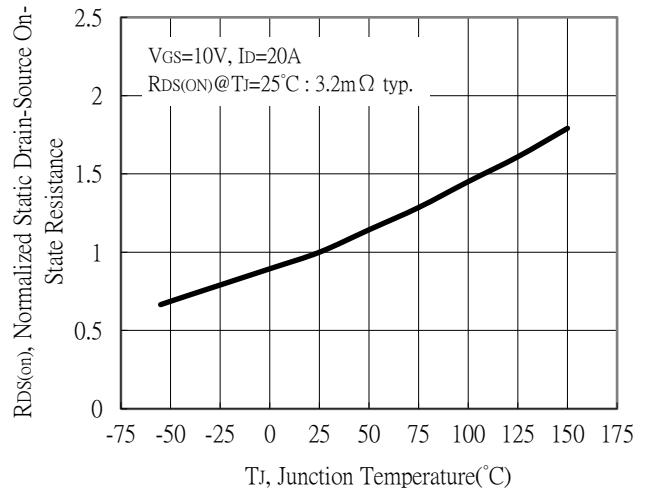


Typical Characteristics (Cont.)


Capacitance vs Drain-to-Source Voltage

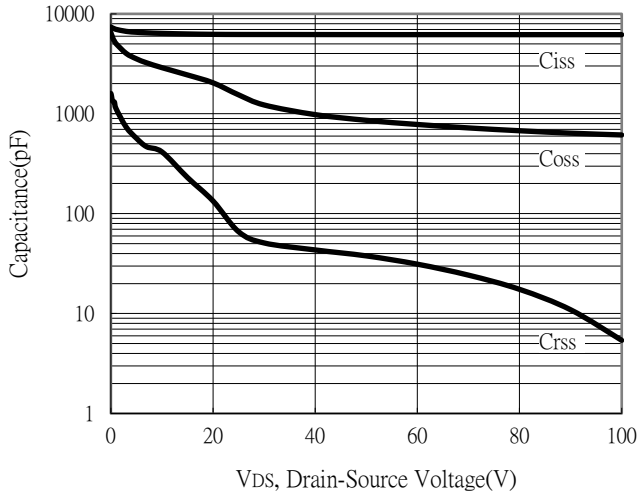


Threshold Voltage vs Junction Temperature

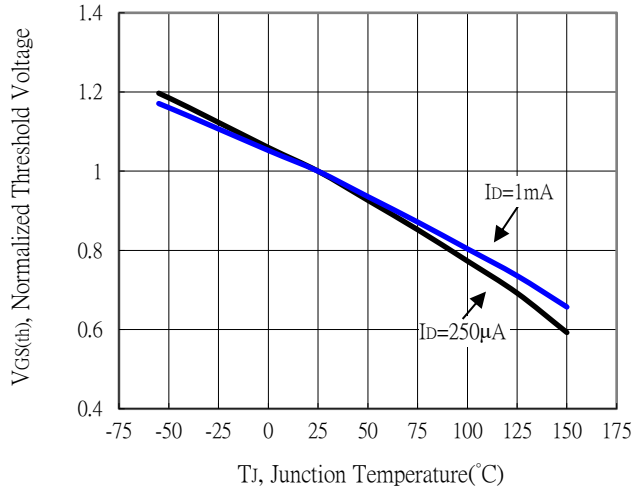


Forward Transfer Admittance vs Drain Current

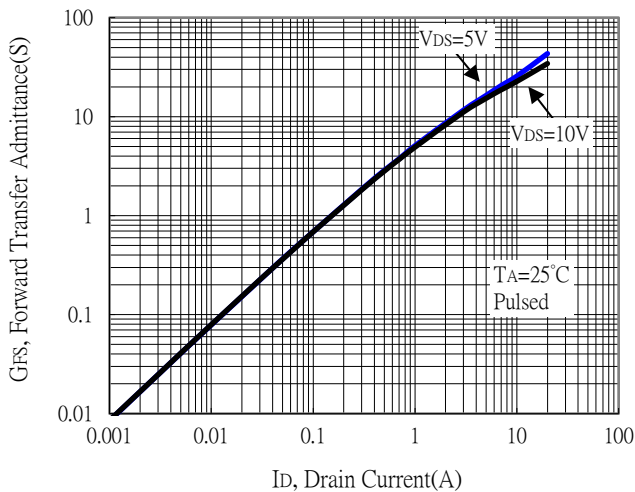


Gate Charge Characteristics

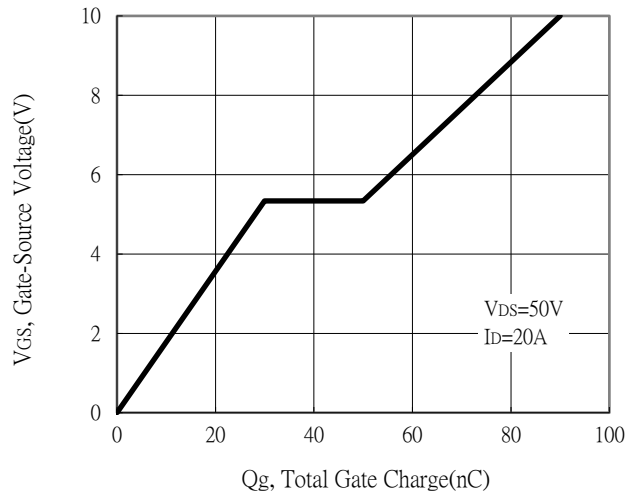

Maximum Safe Operating Area

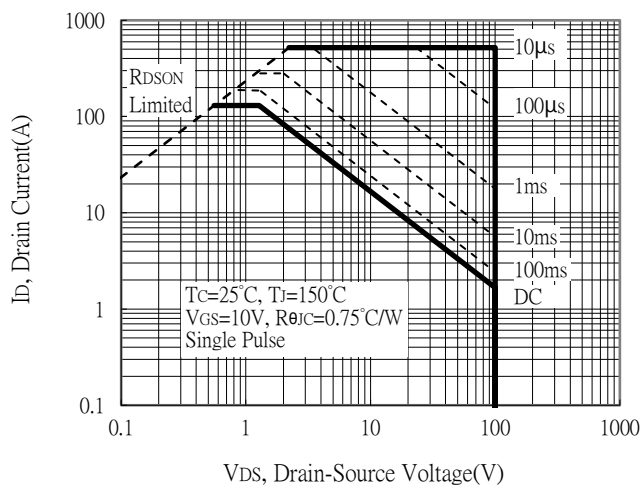


Maximum Drain Current vs Case Temperature

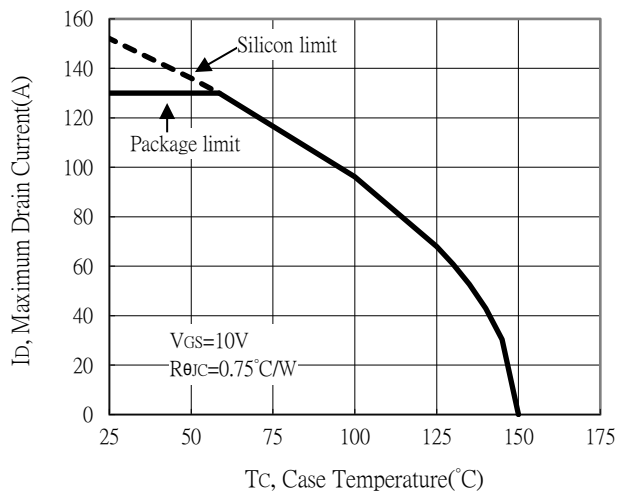




Typical Characteristics (Cont.)


Maximum Safe Operating Area

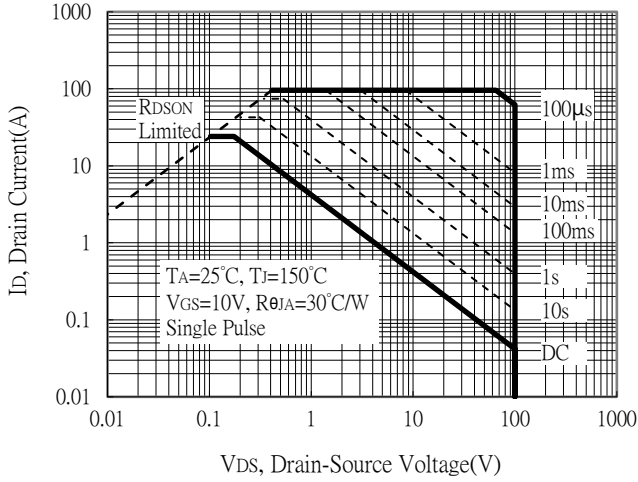


Maximum Drain Current vs Junction Temperature

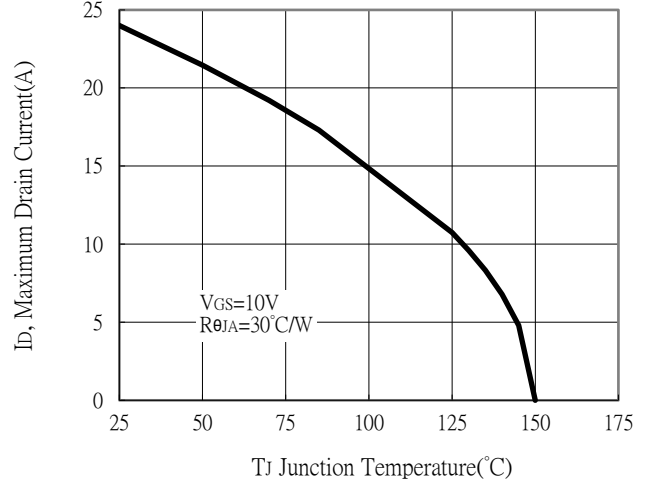

Single Pulse Power Rating, Junction to Case

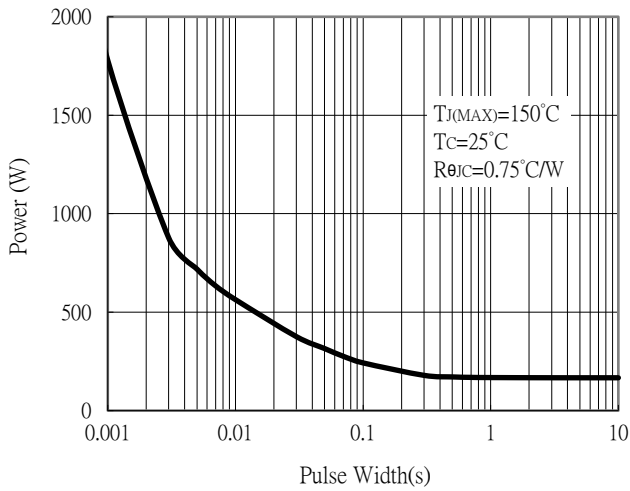


Single Pulse Power Rating, Junction to Ambient

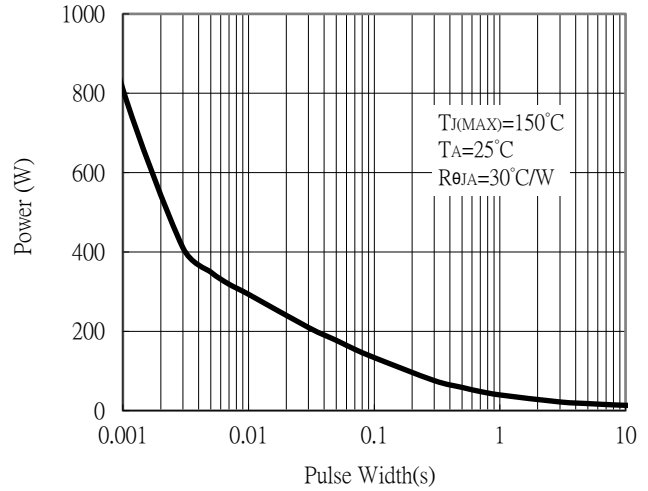


Typical Characteristics (Cont.)


Transient Thermal Response Curves

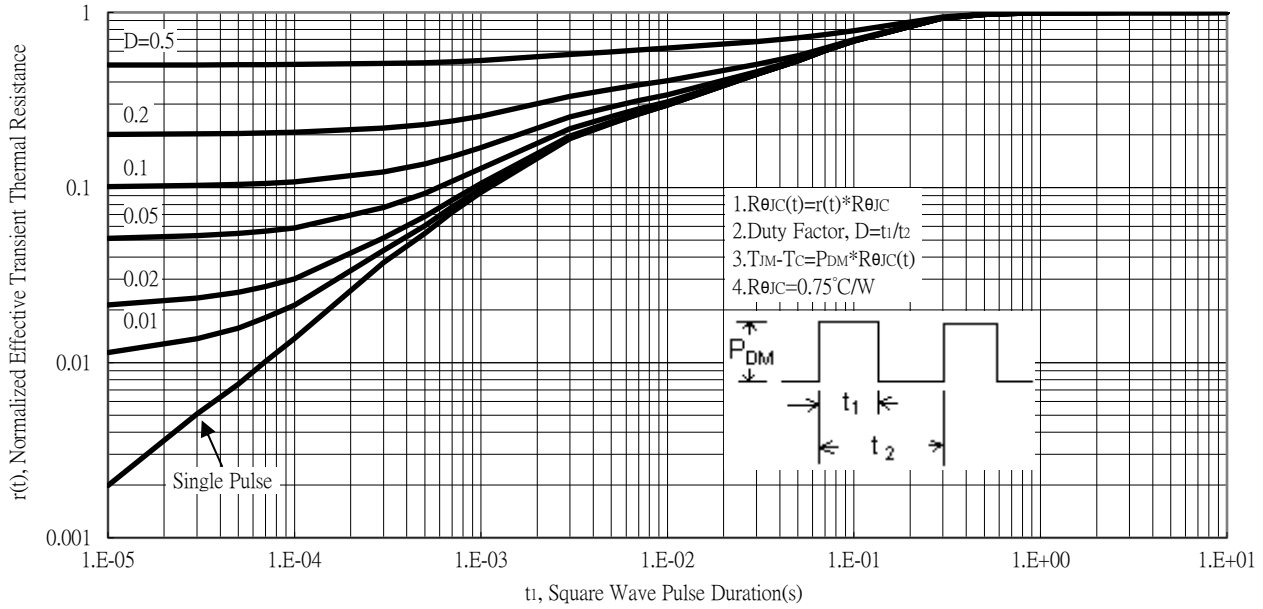

Transient Thermal Response Curves

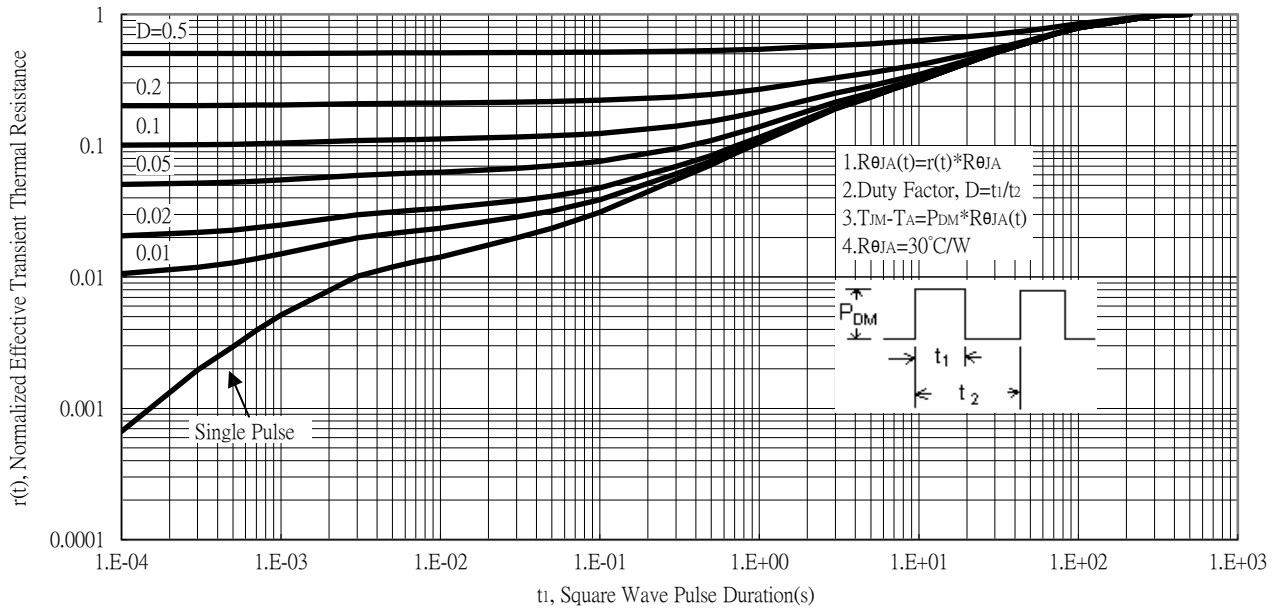


Recommended Soldering Footprint

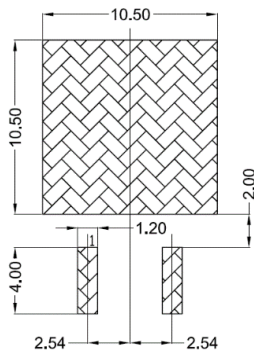


Unit : mm

Reel Dimension

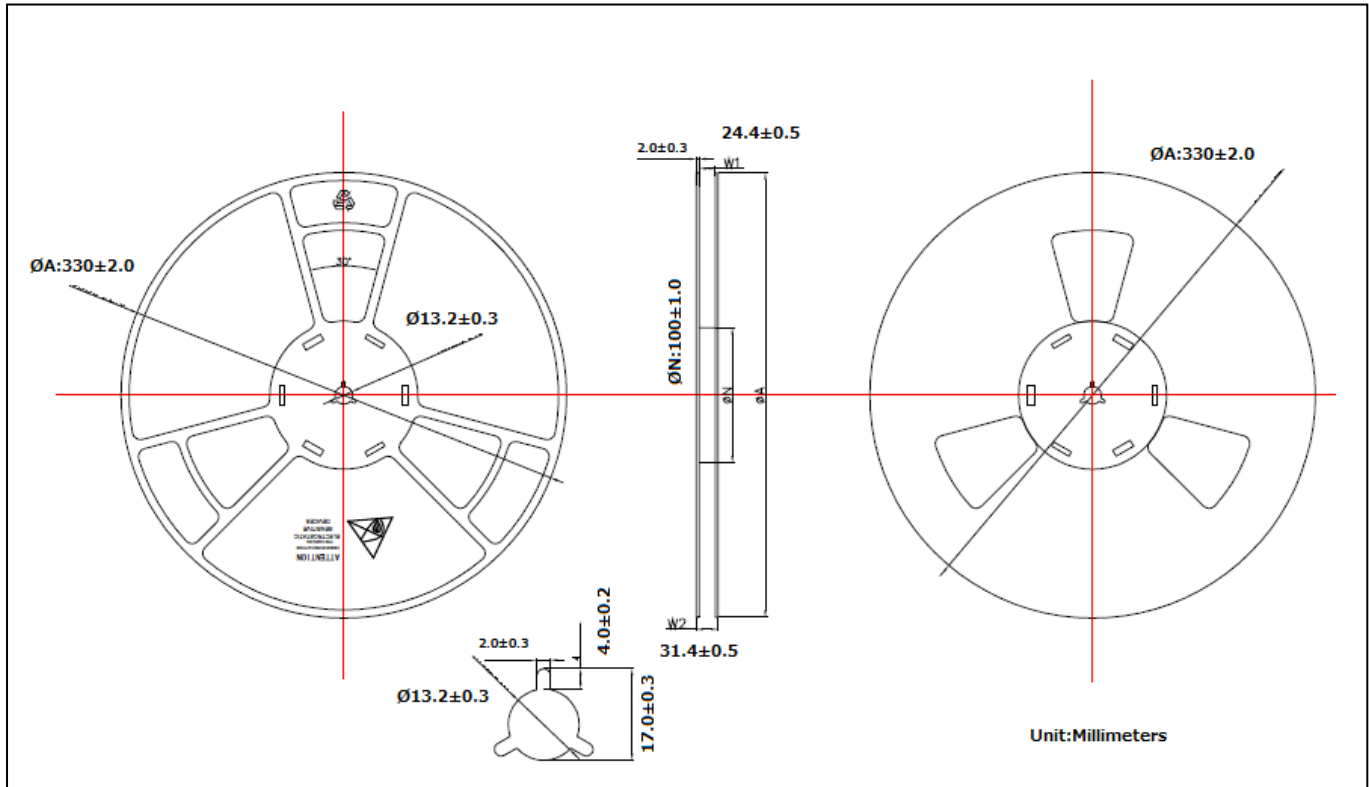


Carrier Tape Dimension

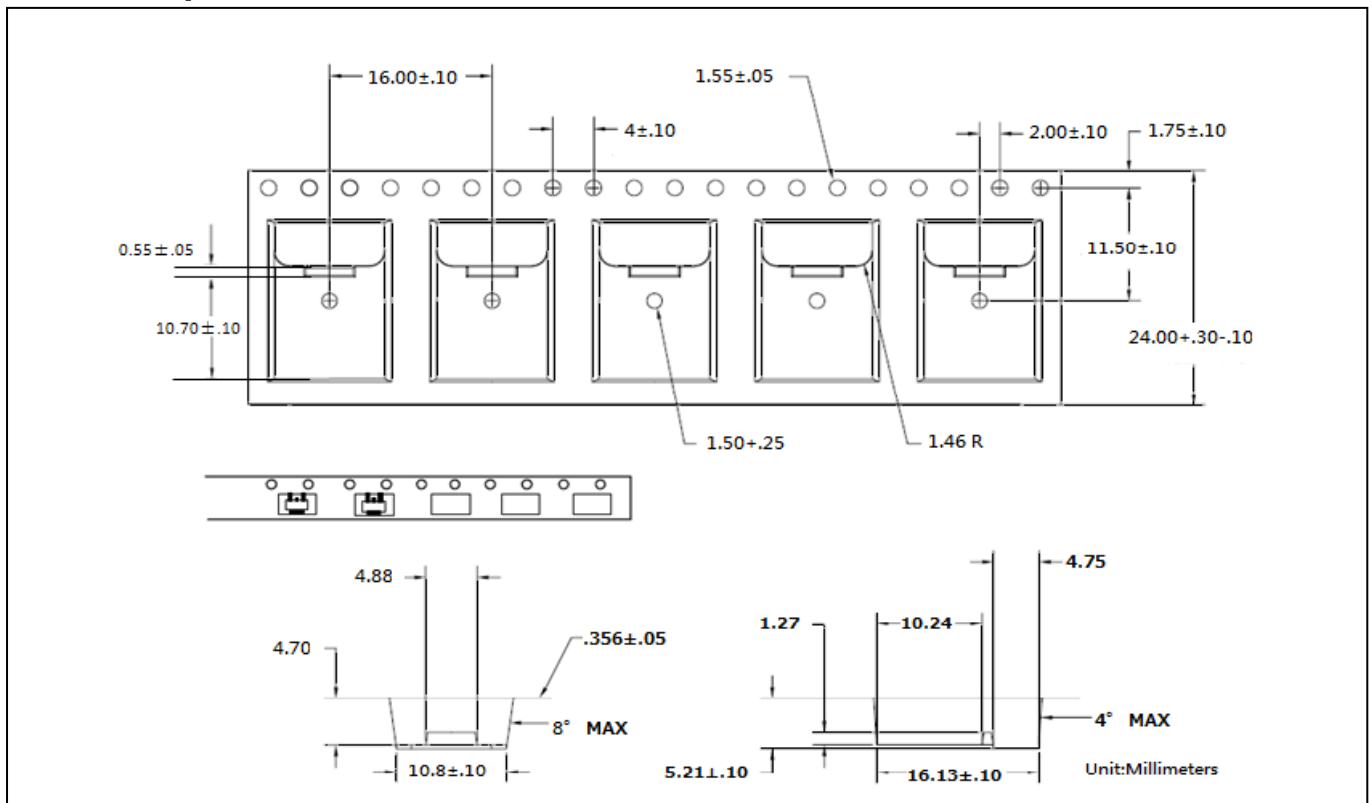

Recommended wave soldering condition

| | | |
|-----------------|------------------|-----------------|
| Product | Peak Temperature | Soldering Time |
| Pb-free devices | 260 +0/-5 °C | 5 +1/-1 seconds |


Recommended temperature profile for IR reflow

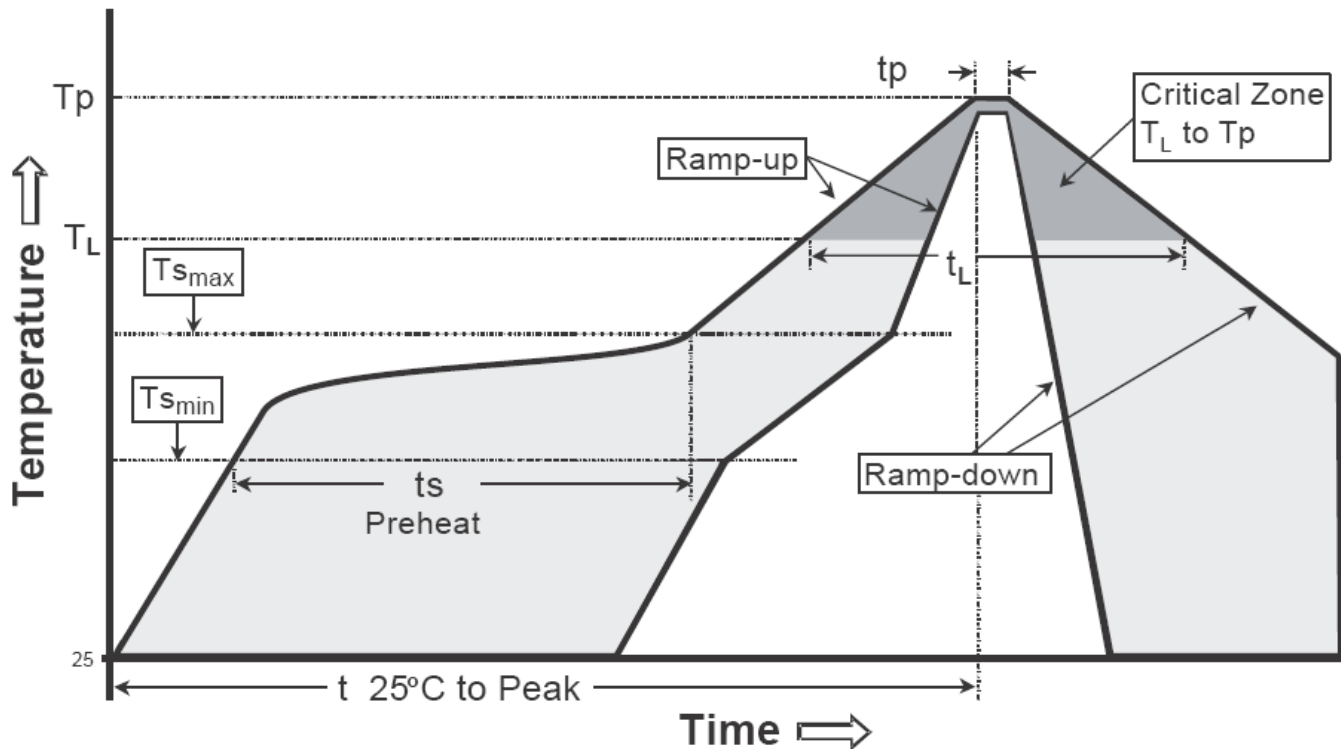

| Profile feature | Sn-Pb eutectic Assembly | Pb-free Assembly |
|--|-------------------------|------------------|
| Average ramp-up rate (Tsmax to Tp) | 3°C/second max. | 3°C/second max. |
| Preheat | | |
| -Temperature Min(Ts min) | 100°C | 150°C |
| -Temperature Max(Ts max) | 150°C | 200°C |
| -Time(ts min to ts max) | 60-120 seconds | 60-180 seconds |
| Time maintained above: | | |
| -Temperature (Tl) | 183°C | 217°C |
| - Time (tl) | 60-150 seconds | 60-150 seconds |
| Peak Temperature(Tp) | 240 +0/-5 °C | 260 +0/-5 °C |
| Time within 5°C of actual peak temperature(tp) | 10-30 seconds | 20-40 seconds |
| Ramp down rate | 6°C/second max. | 6°C/second max. |
| Time 25 °C to peak temperature | 6 minutes max. | 8 minutes max. |

Note : All temperatures refer to topside of the package, measured on the package body surface.

TO-263 Dimension

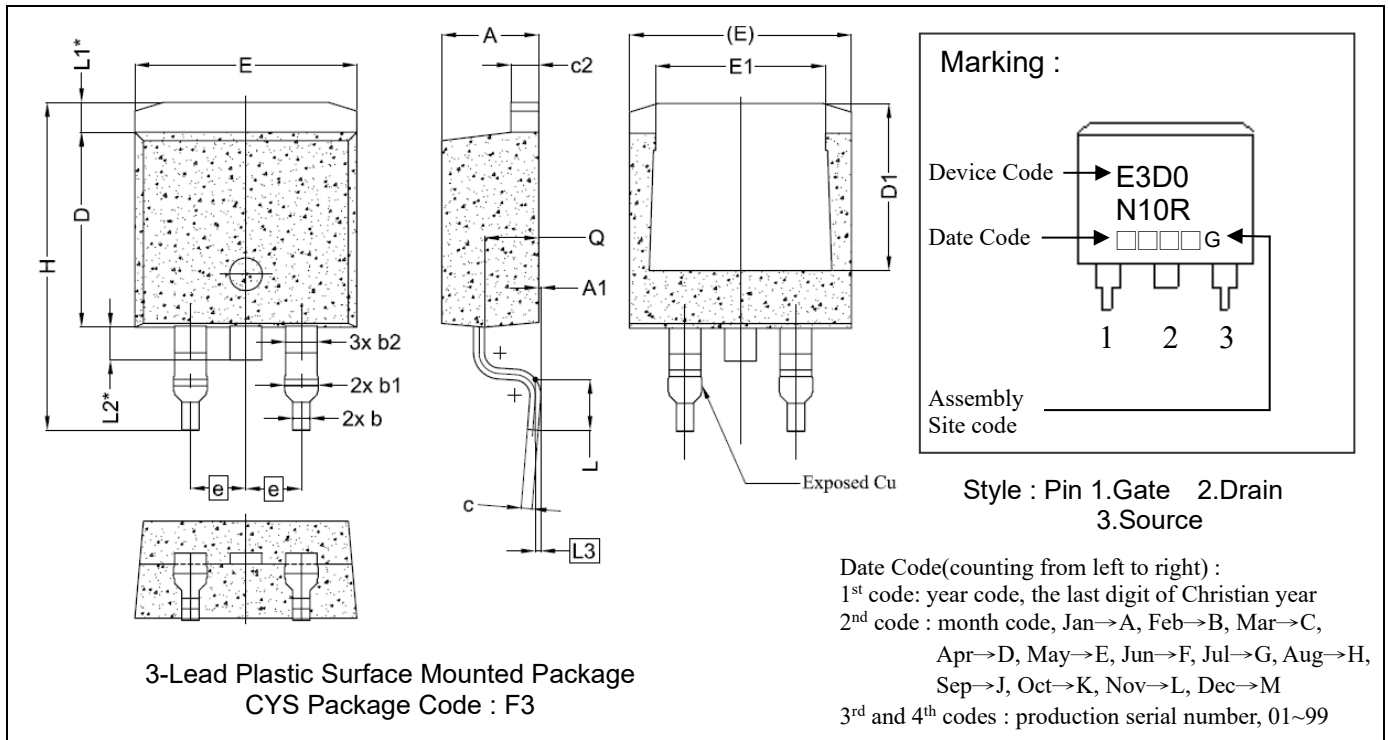

3-Lead Plastic Surface Mounted Package
 CYS Package Code : F3

Marking :

Device Code → E3D0
 N10R
 Date Code → □□□□G
 Assembly Site code

Style : Pin 1.Gate 2.Drain
 3.Source

Date Code(counting from left to right) :
 1st code : year code, the last digit of Christian year
 2nd code : month code, Jan→A, Feb→B, Mar→C,
 Apr→D, May→E, Jun→F, Jul→G, Aug→H,
 Sep→J, Oct→K, Nov→L, Dec→M
 3rd and 4th codes : production serial number, 01~99

| DIM | Millimeters | | Inches | | DIM | Millimeters | | Inches | |
|-----|-------------|------|--------|-------|-----|-------------|-------|-----------|-------|
| | Min. | Max. | Min. | Max. | | Min. | Max. | Min. | Max. |
| A | 4.24 | 4.64 | 0.166 | 0.182 | E | 9.96 | 10.36 | 0.392 | 0.407 |
| A1 | 0.00 | 0.25 | 0.000 | 0.009 | E1 | 6.89 | 7.89 | 0.271 | 0.310 |
| b | 0.70 | 0.90 | 0.027 | 0.035 | e | 2.54 BSC | | 0.100 BSC | |
| b1 | 1.20 | 1.75 | 0.047 | 0.068 | H | 14.61 | 15.88 | 0.575 | 0.625 |
| b2 | 1.20 | 1.70 | 0.047 | 0.066 | L | 1.78 | 2.79 | 0.070 | 0.109 |
| c | 0.40 | 0.60 | 0.015 | 0.023 | L1 | 1.36 REF | | 0.053 REF | |
| c2 | 1.15 | 1.40 | 0.045 | 0.055 | L2 | 1.50 REF | | 0.059 REF | |
| D | 8.82 | 9.02 | 0.347 | 0.355 | L3 | 0.25 BSC | | 0.009 BSC | |
| D1 | 6.86 | - | 0.27 | - | Q | 2.30 | 2.70 | 0.090 | 0.106 |

Notes: 1.Controlling dimension: millimeters.
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material:

- Lead: Pure tin plated.
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0.

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.