

N- AND P-Channel Logic Level Enhancement Mode MOSFET

MTBA6C12Q8

	N-CH	P-CH
BV _{DSS}	120V	-120V
I _D @ V _{GS} =10V(-10V)	2A	-1.7A
R _{DSON} (typ.) @V _{GS} =(-)10V	178 mΩ	246 mΩ
R _{DSON} (typ.) @V _{GS} =(-)4.5V	185 mΩ	276 mΩ

Description


The MTBA6C12Q8 consists of a N-channel and a P-channel enhancement-mode MOSFET in a single SOP-8 package, providing the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The SOP-8 package is universally preferred for all commercial-industrial surface mount applications.


Features

- Simple drive requirement
- Low on-resistance
- Fast switching speed
- Pb-free lead plating and halogen-free package

Equivalent Circuit

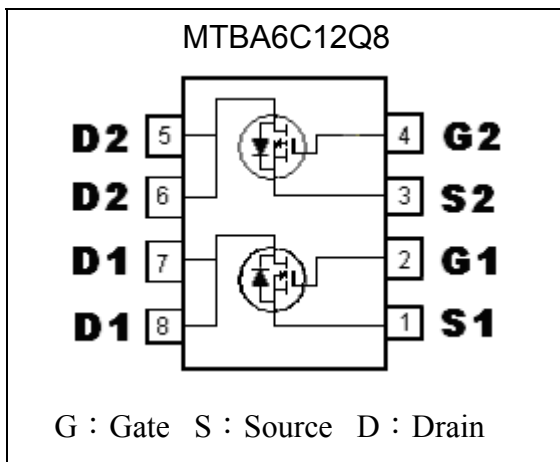

Outline

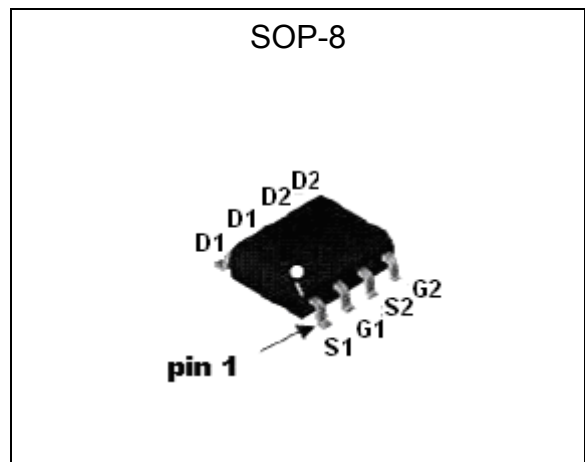

Ordering Information

Device	Package	Shipping
MTBA6C12Q8-0-T3-G	SOP-8 (Pb-free lead plating & halogen-free package)	2500 pcs / Tape & Reel

- ↑ Environment friendly grade : S for RoHS compliant products, G for RoHS compliant and green compound products
- ↑ Packing spec, T3 : 2500 pcs / tape & reel, 13" reel
- ↑ Product rank, zero for no rank products
- ↑ Product name



Absolute Maximum Ratings (T_C=25°C, unless otherwise noted)

Parameter	Symbol	Limits		Unit
		N-channel	P-channel	
Drain-Source Breakdown Voltage	BV _{DSS}	120	-120	V
Gate-Source Voltage	V _{GS}	±20	±20	
Continuous Drain Current	I _D	T _C =25 °C, V _{GS} =10V (-10V)	3.5	A
		T _C =100 °C, V _{GS} =10V (-10V)	2.5	
Continuous Drain Current (Note 2)	I _{DSM}	T _A =25 °C, V _{GS} =10V (-10V)	2.0	A
		T _A =70 °C, V _{GS} =10V (-10V)	1.7	
Pulsed Drain Current (Note 1)	I _{DM}	10	-8	
Power Dissipation for Dual Operation @T _C =25°C	P _D	6		W
Power Dissipation for Dual Operation @T _A =25°C	P _D SM	3		
Power Dissipation for Single Operation @T _A =25°C		1.9 (Note 2)		
		1.1 (Note 3)		
Operating Junction and Storage Temperature Range	T _j ; T _{stg}	-55~+175		°C

Thermal Data

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-case, max	R _{th,j-c}	25	°C/W
Thermal Resistance, Junction-to-ambient, max	R _{th,j-a}	50	
		78 (Note 2)	
		135 (Note 3)	

- Note : 1.Pulse width limited by maximum junction temperature.
 2.Surface mounted on 1 in² copper pad of FR-4 board, pulse width≤10s, single operation.
 3.Surface mounted on minimum copper pad, pulse width≤10s, single operation.

N-Channel Electrical Characteristics (T_C=25°C, unless otherwise specified)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static					
BV _{DSS}	120	-	-	V	V _{GS} =0V, I _D =250μA
ΔBV _{DSS} /ΔT _j	-	0.1	-	V/°C	Reference to 25°C, I _D =250μA
V _{GS(th)}	1.3	-	2.3	V	V _{DS} =V _{GS} , I _D =250μA
I _{GSS}	-	-	±100	nA	V _{GS} =±20V, V _{DS} =0V
I _{DSS}	-	-	1	μA	V _{DS} =96V, V _{GS} =0V
	-	-	10	μA	V _{DS} =96V, V _{GS} =0, T _j =55°C
*R _D S(ON)	-	178	230	mΩ	I _D =2A, V _{GS} =10V
	-	185	250		I _D =1.5A, V _{GS} =4.5V
*G _{FS}	-	6.3	-	S	V _{DS} =10V, I _D =2A
Dynamic					
C _{iss}	-	298	-	pF	V _{DS} =25V, V _{GS} =0, f=1MHz
C _{oss}	-	29	-		
C _{rss}	-	14	-		



*td(ON)	-	3.4	-	ns	V _{DS} =75V, I _D =1A, V _{GS} =10V, R _G =6Ω
*tr	-	16.2	-		
*td(OFF)	-	13.4	-		
*tf	-	25.4	-		
*Q _g	-	8	-	nC	V _{DS} =96V, I _D =2A, V _{GS} =10V
*Q _{gs}	-	0.9	-		
*Q _{gd}	-	2.3	-		
Body Diode					
*I _S	-	-	2	A	
*I _{SM}	-	-	10		
*V _{SD}	-	0.79	1.3	V	V _{GS} =0V, I _S =2A
t _{rr} *	-	22	-	ns	I _F =2A, dI _F /dt=100A/μs
Q _{rr} *	-	25	-	nC	


P-Channel Electrical Characteristics (T_c=25°C, unless otherwise specified)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static					
BV _{DSS}	-120	-	-	V	V _{GS} =0V, I _D =-250μA
ΔBV _{DSS} /ΔT _j	-	-0.09	-	V/°C	Reference to 25°C, I _D =-250μA
V _{GS(th)}	-1.3	-	-2.3	V	V _{DS} =V _{GS} , I _D =-250μA
I _{GSS}	-	-	±100	nA	V _{GS} =±20V, V _{DS} =0V
I _{DSS}	-	-	-1	μA	V _{DS} =-96V, V _{GS} =0V
	-	-	-10		V _{DS} =-96V, V _{GS} =0, T _j =55°C
*R _{DSS(ON)}	-	246	310	mΩ	I _D =-1.5A, V _{GS} =-10V
	-	276	340		I _D =-1A, V _{GS} =-4.5V
*G _{FS}	-	4	-	S	V _{DS} =-10V, I _D =-1.5A
Dynamic					
C _{iss}	-	695	-	pF	V _{DS} =-25V, V _{GS} =0, f=1MHz
C _{oss}	-	48	-		
C _{rss}	-	23	-		
*td(ON)	-	7	-	ns	V _{DS} =-75V, I _D =-1A, V _{GS} =-10V, R _G =6Ω
*tr	-	17	-		
*td(OFF)	-	40	-		
*tf	-	49	-		
*Q _g	-	13.5	-	nC	V _{DS} =-96V, I _D =-1.5A, V _{GS} =-10V
*Q _{gs}	-	1.8	-		
*Q _{gd}	-	3.2	-		
Body Diode					
*I _S	-	-	-1.7	A	
*I _{SM}	-	-	-8		
*V _{SD}	-	-0.76	-1.3	V	V _{GS} =0V, I _S =-1.5A
t _{rr} *	-	19	-	ns	I _F =1.5A, dI _F /dt=100A/μs
Q _{rr} *	-	19	-	nC	


*Pulse Test : Pulse Width ≤300μs, Duty Cycle ≤2%

Typical Characteristics : Q1(N-channel)


Typical Output Characteristics

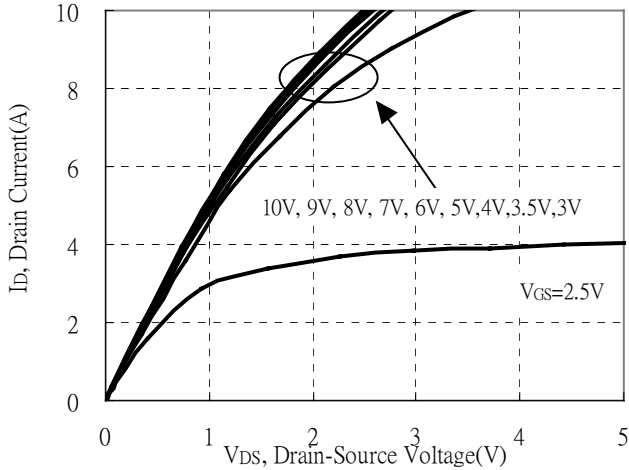


Brekdown Voltage vs Ambient Temperature

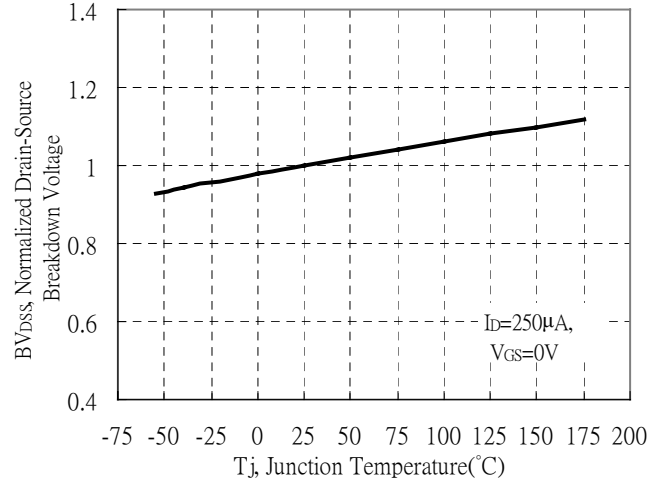


Static Drain-Source On-State resistance vs Drain Current

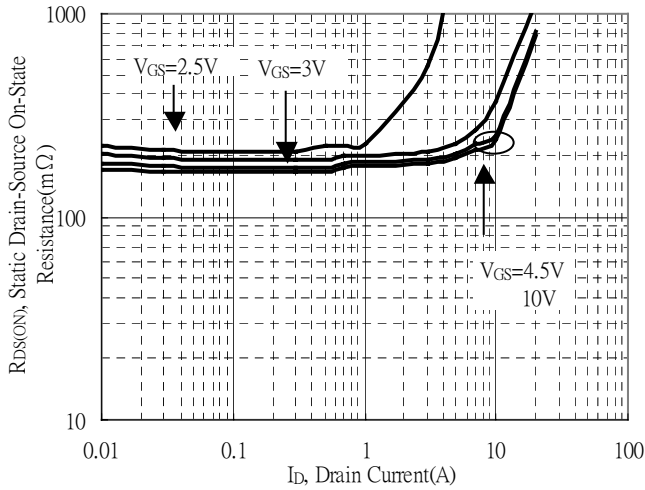


Reverse Drain Current vs Source-Drain Voltage

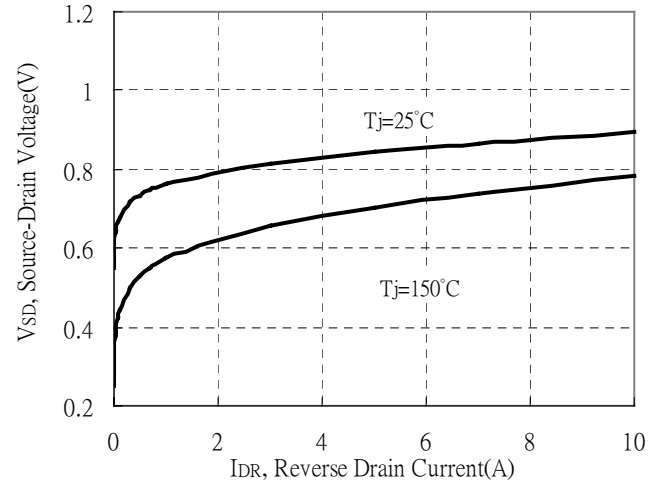

Static Drain-Source On-State Resistance vs Gate-Source Voltage

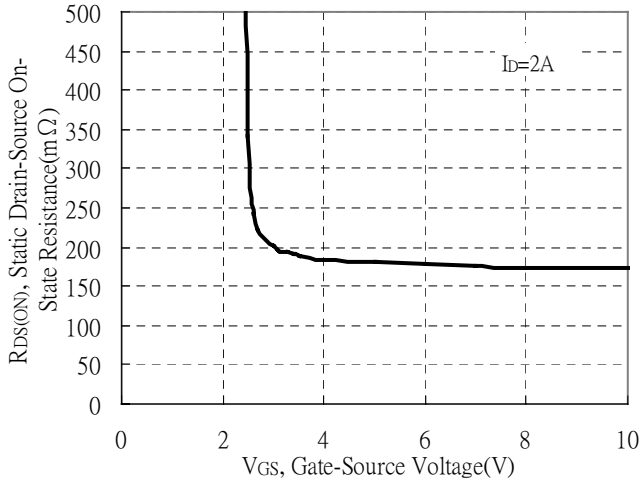


Drain-Source On-State Resistance vs Junction Temperature

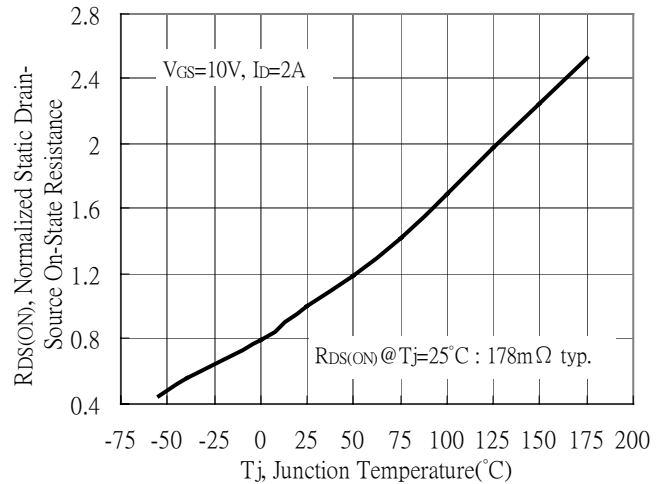


Typical Characteristics(Cont.) : Q1(N-channel)


Capacitance vs Drain-to-Source Voltage

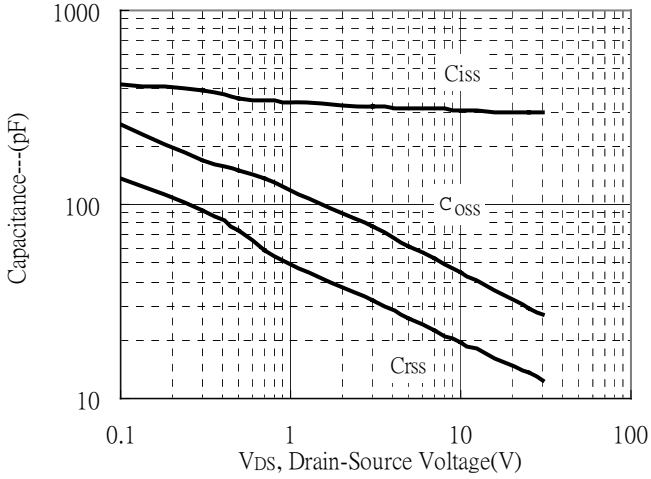


Threshold Voltage vs Junction Temperature

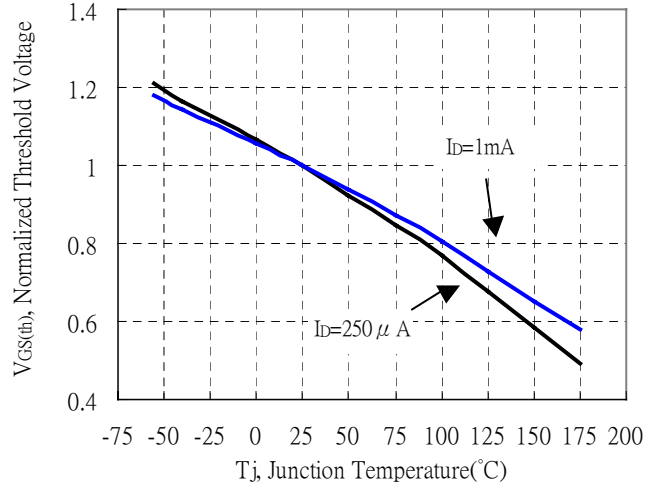


Forward Transfer Admittance vs Drain Current

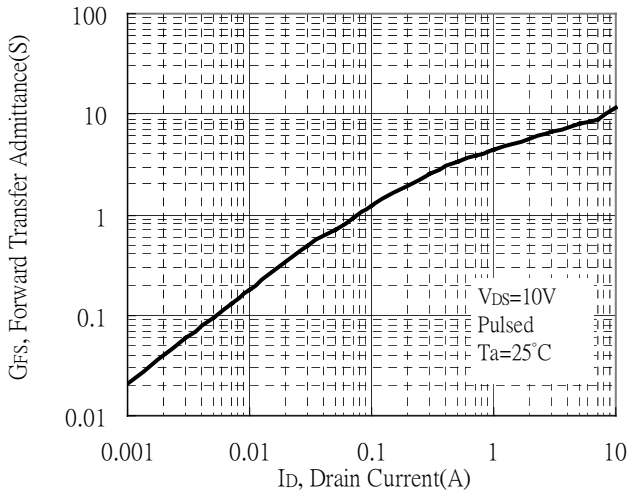


Gate Charge Characteristics

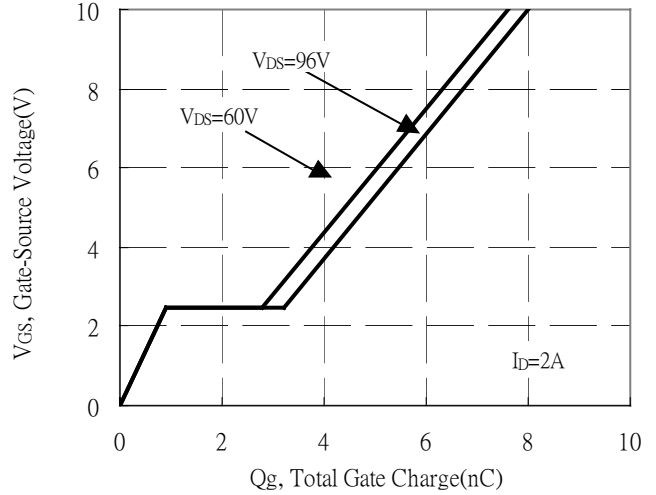

Maximum Safe Operating Area

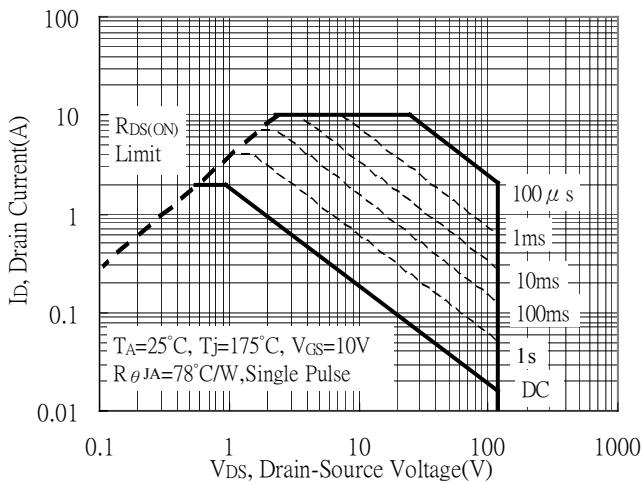


Maximum Drain Current vs Junction Temperature

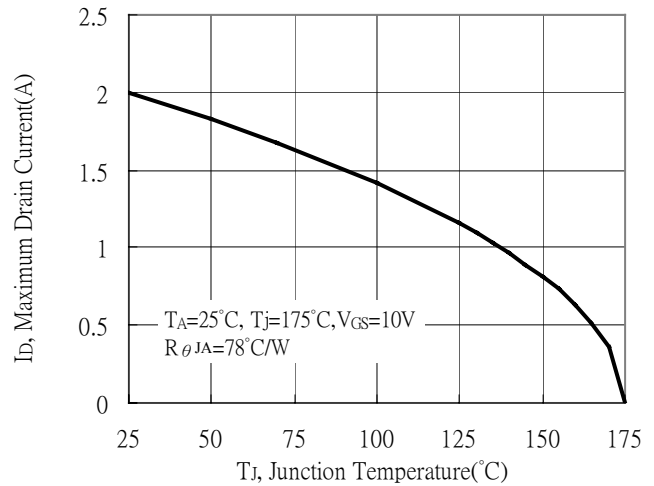


Typical Characteristics(Cont.) : Q1(N-channel)

Single Pulse Power Rating, Junction to Ambient
 (Note on page 2)

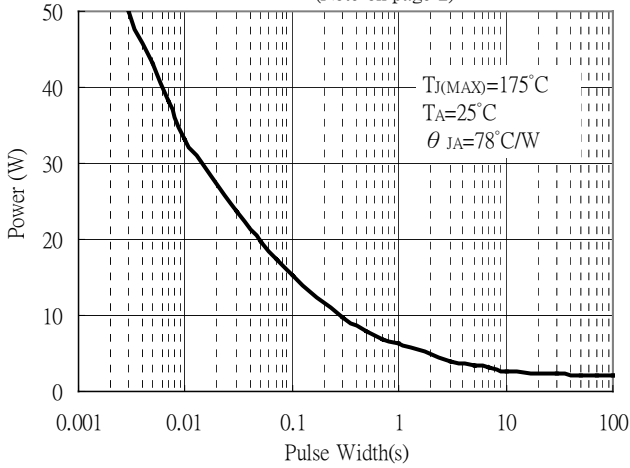


Transient Thermal Response Curves

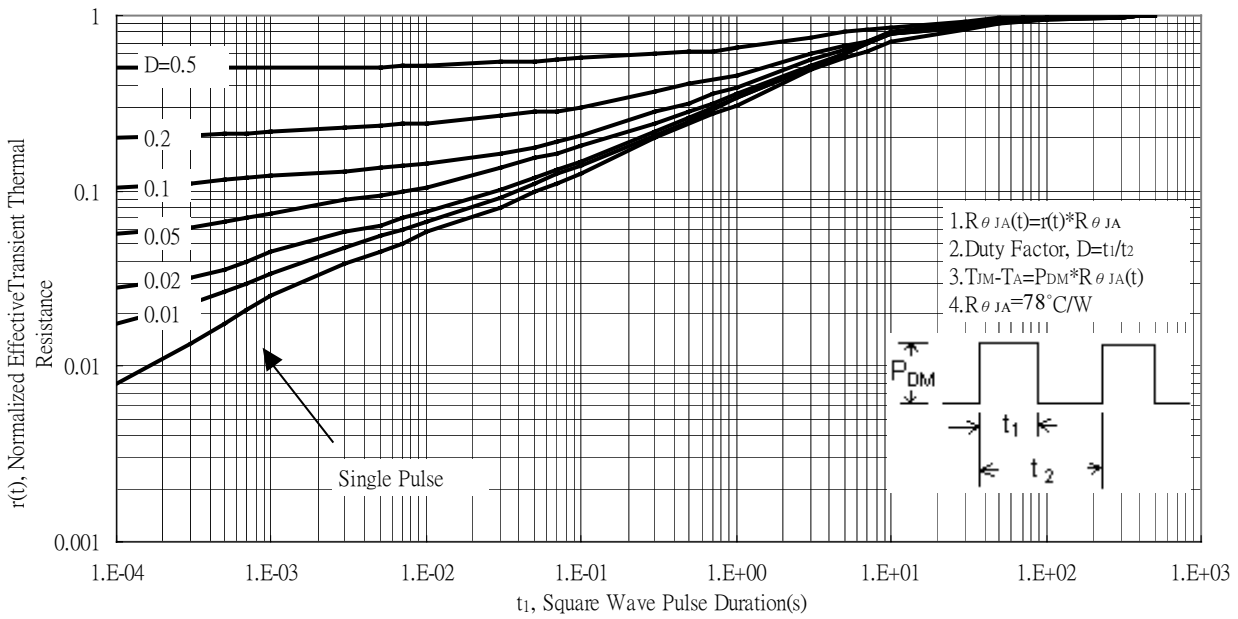


Typical Characteristics : Q2(P-channel)


Typical Output Characteristics

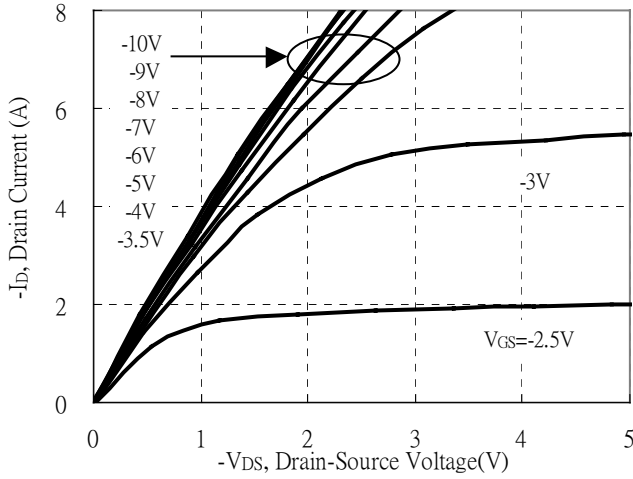


Breakdown Voltage vs Ambient Temperature

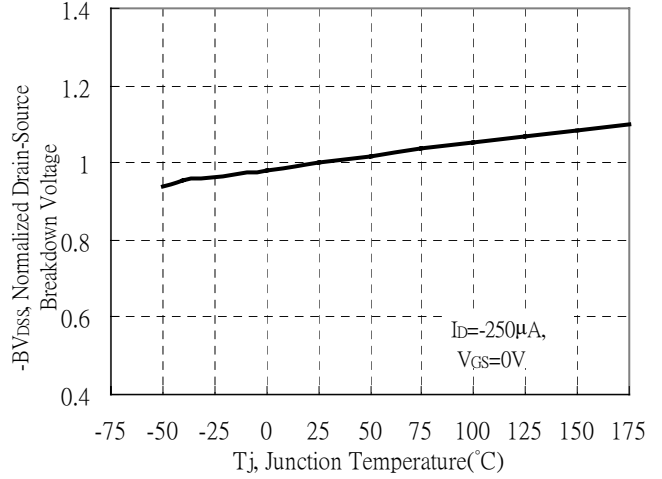


Static Drain-Source On-State resistance vs Drain Current

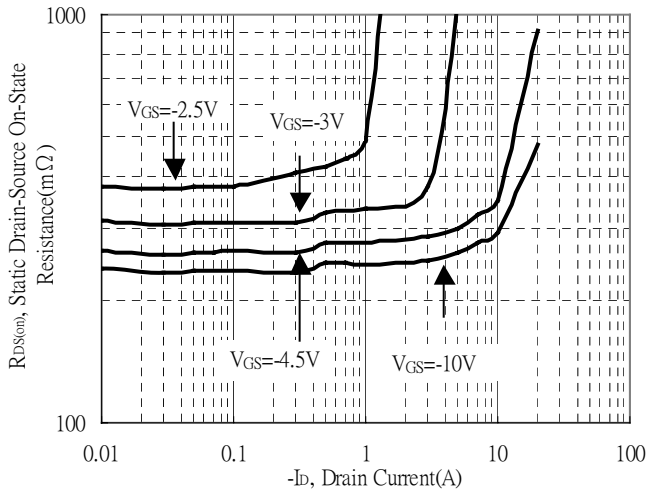


Source Drain Current vs Source-Drain Voltage

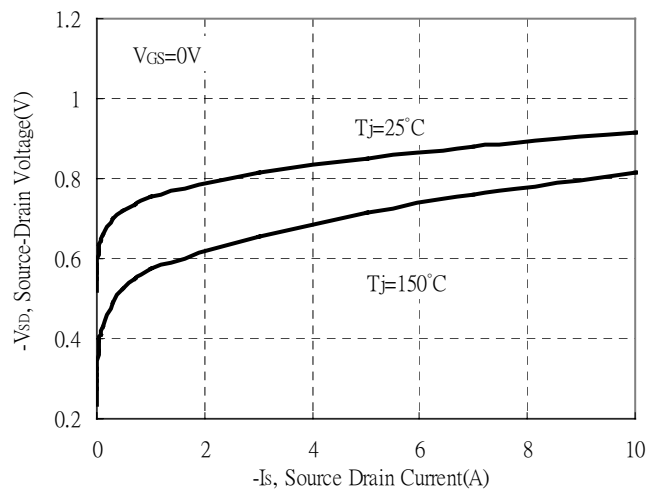

Static Drain-Source On-State Resistance vs Gate-Source Voltage

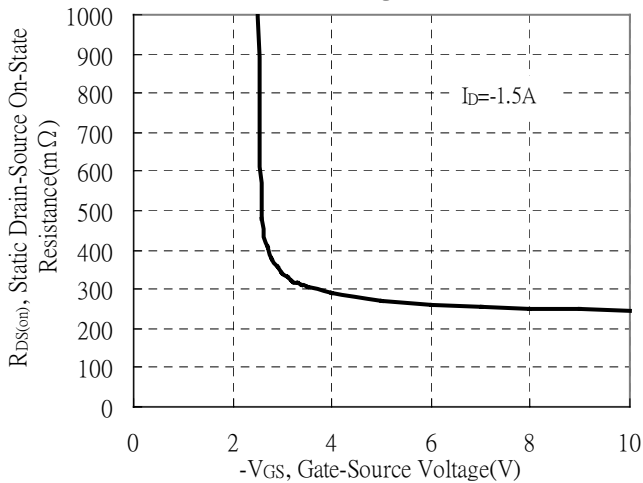


Drain-Source On-State Resistance vs Junction Temperature

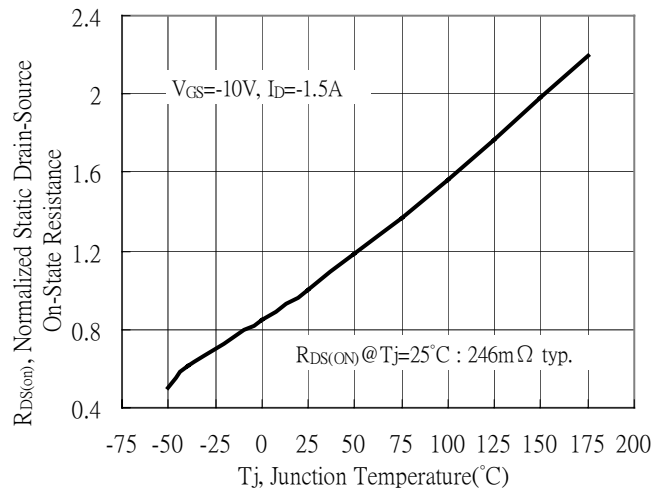


Typical Characteristics(Cont.) : Q2(P-channel)


Capacitance vs Drain-to-Source Voltage

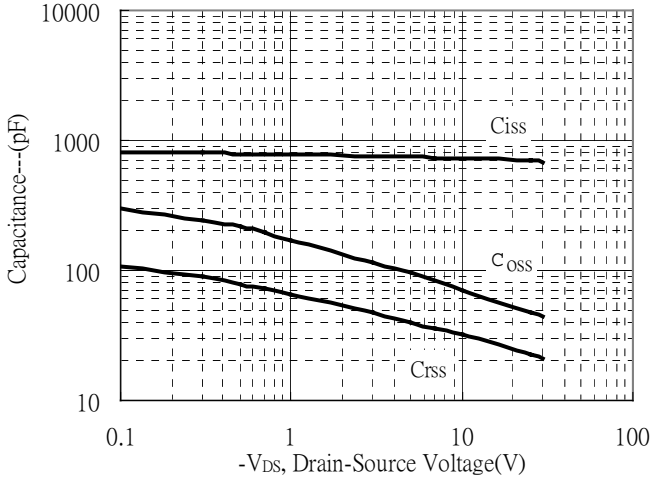


Threshold Voltage vs Junction Temperature

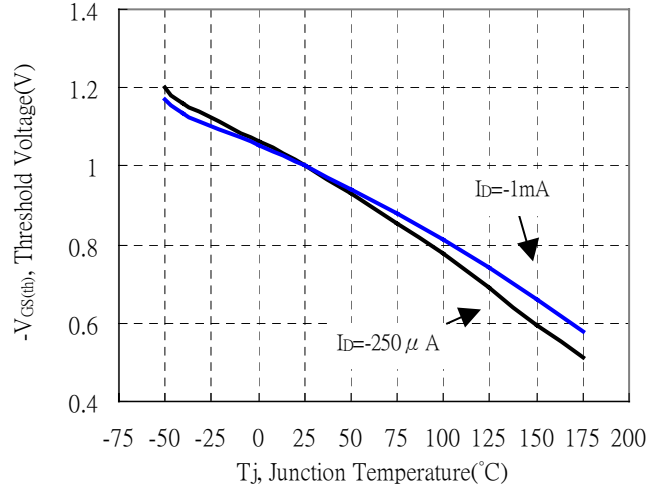


Forward Transfer Admittance vs Drain Current

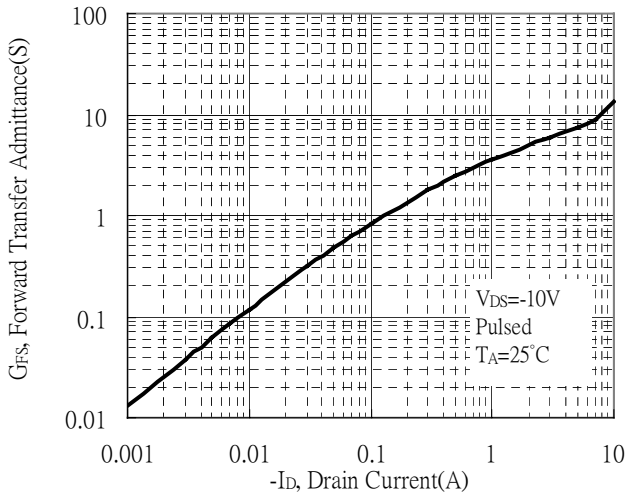


Gate Charge Characteristics

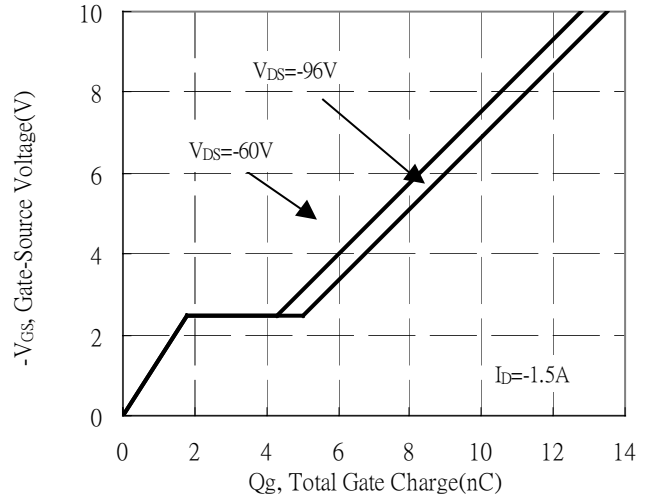



Maximum Safe Operating Area

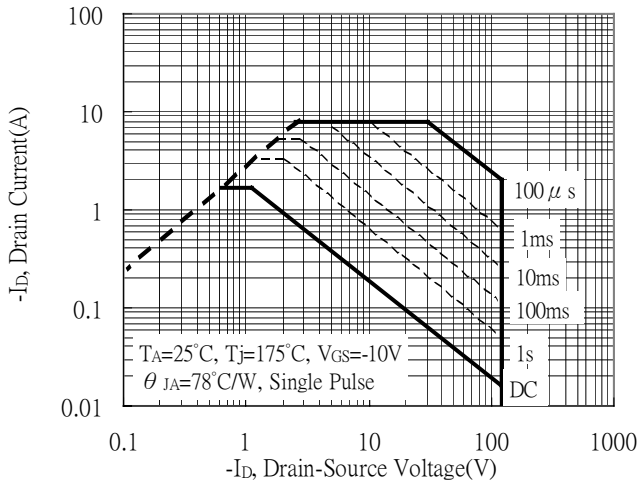


Maximum Drain Current vs Junction Temperature

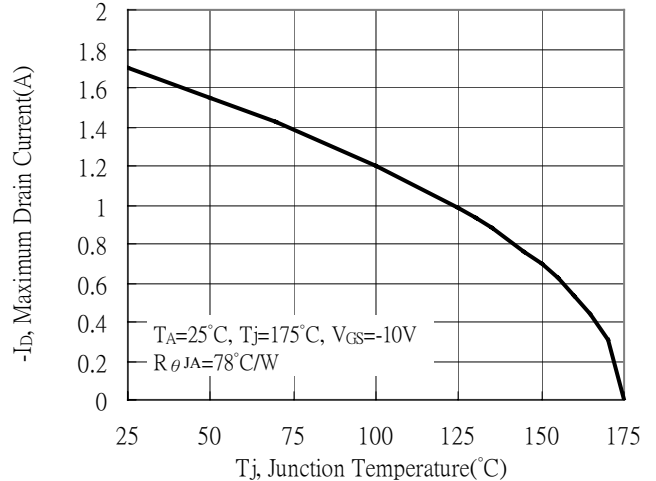


Typical Characteristics(Cont.) : Q2(P-channel)

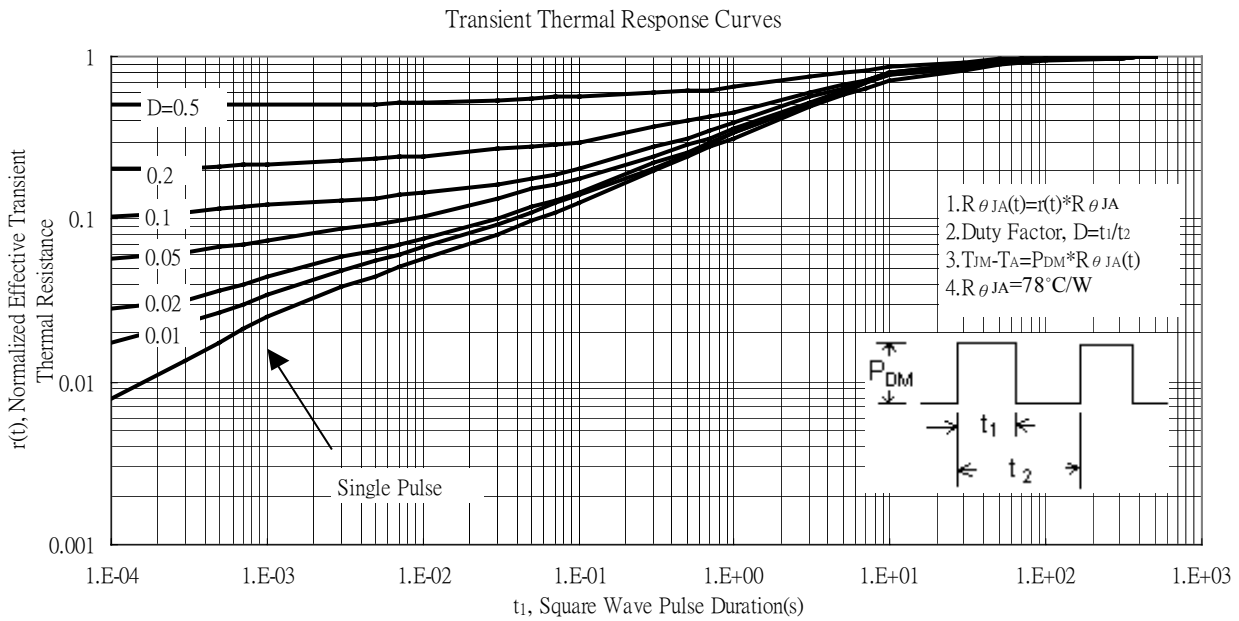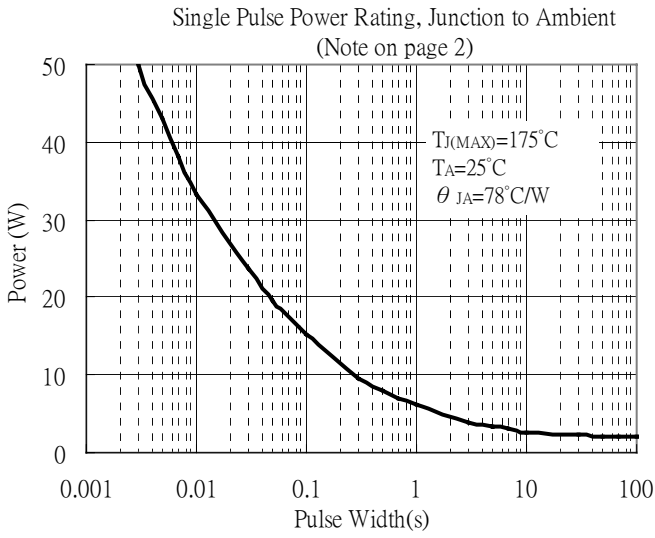


Recommended Soldering Footprint

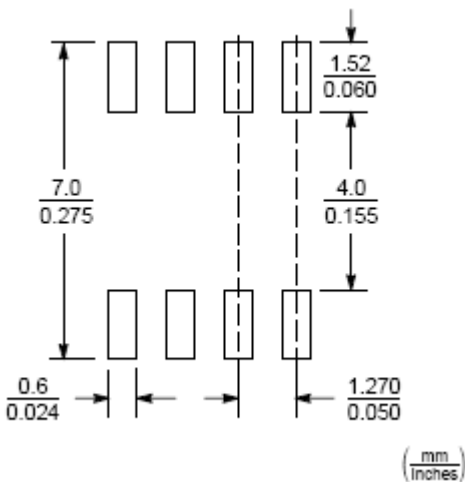

Reel Dimension

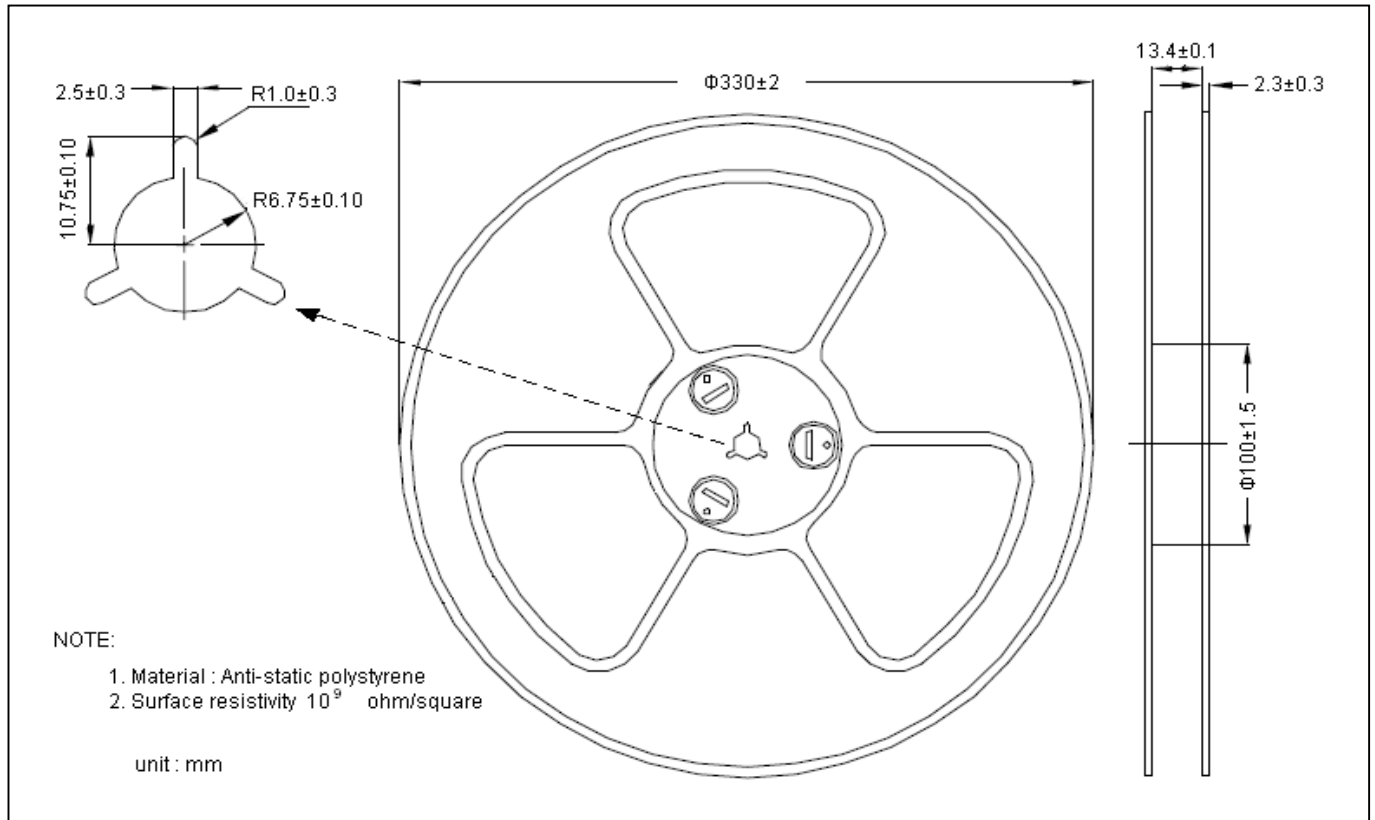


Carrier Tape Dimension

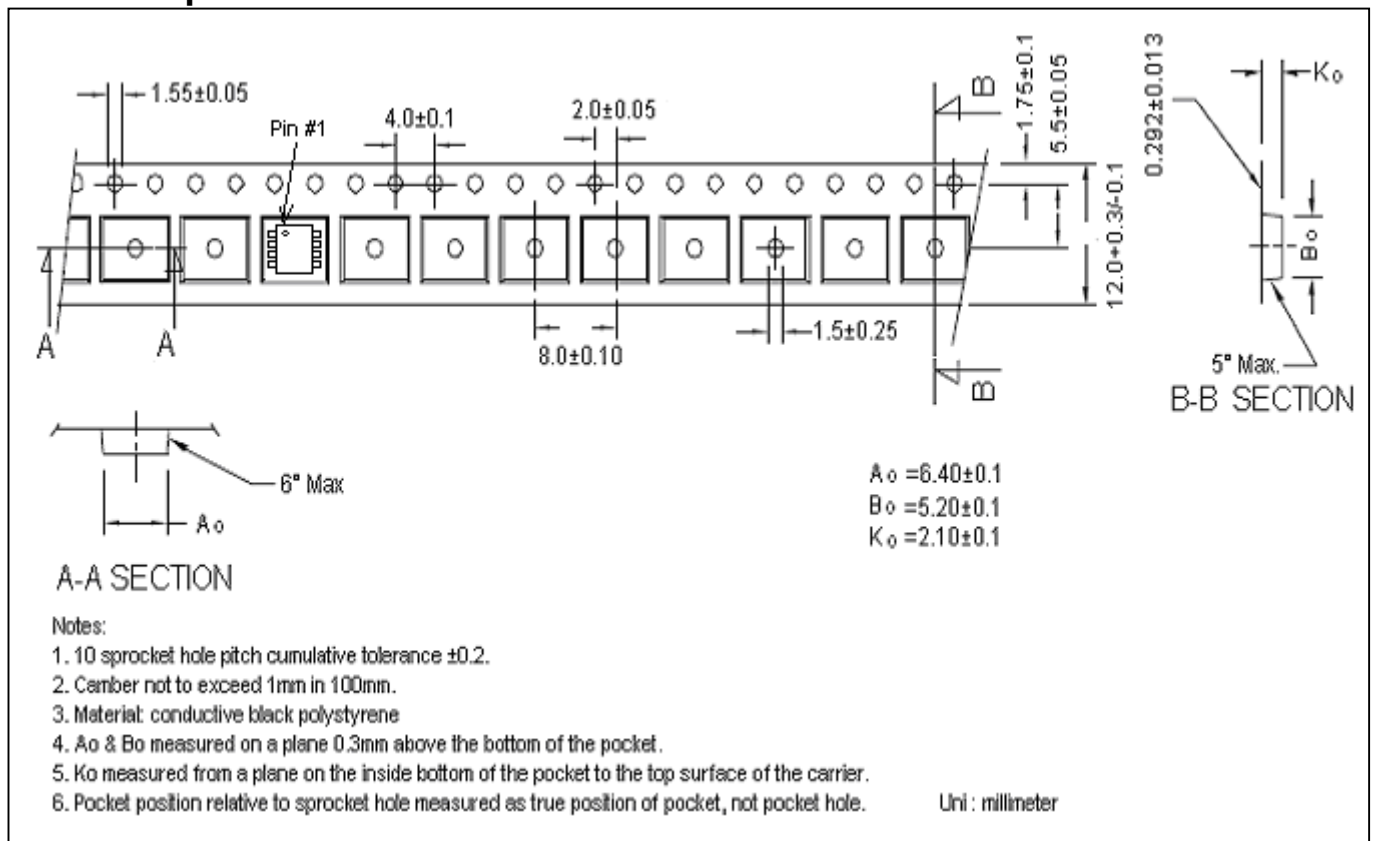

Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds


Recommended temperature profile for IR reflow

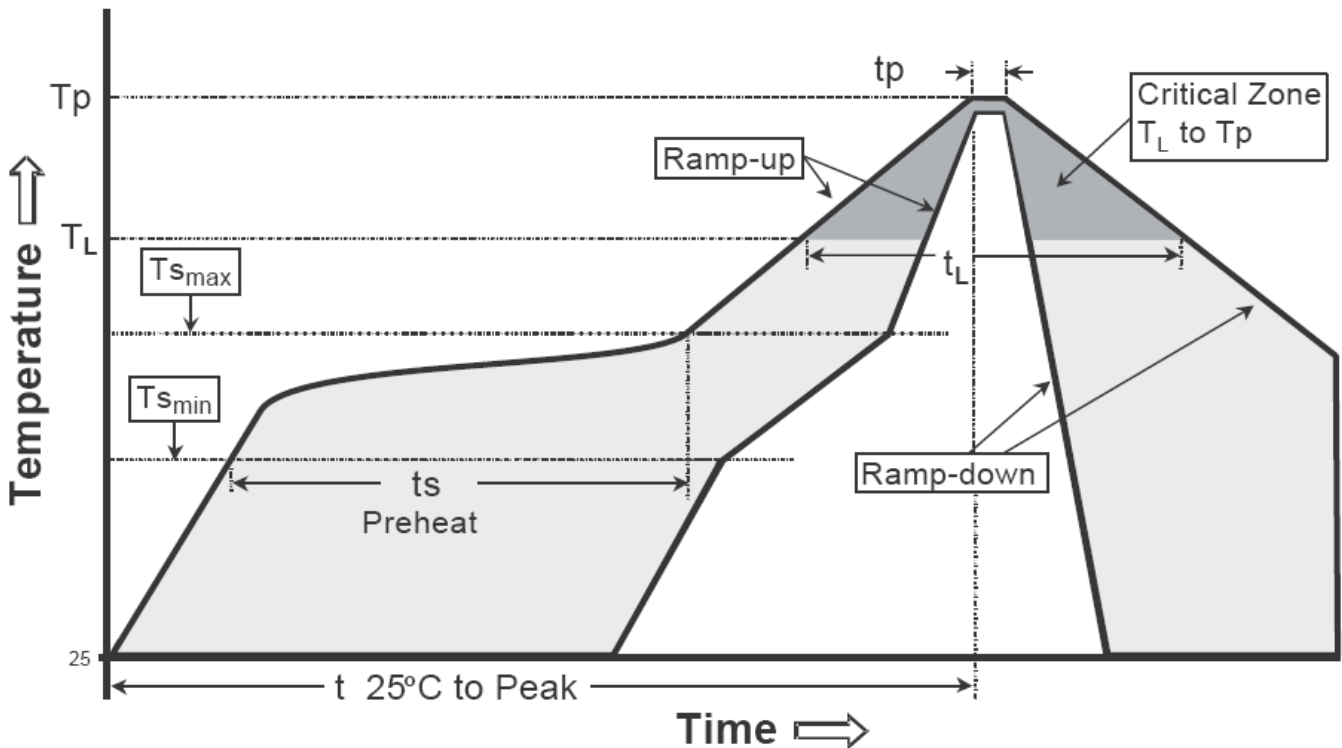

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (T _{smax} to T _p)	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(T _{s min})	100°C	150°C
-Temperature Max(T _{s max})	150°C	200°C
-Time(t _{s min} to t _{s max})	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (T _L)	183°C	217°C
- Time (t _L)	60-150 seconds	60-150 seconds
Peak Temperature(T _P)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

SOP-8 Dimension

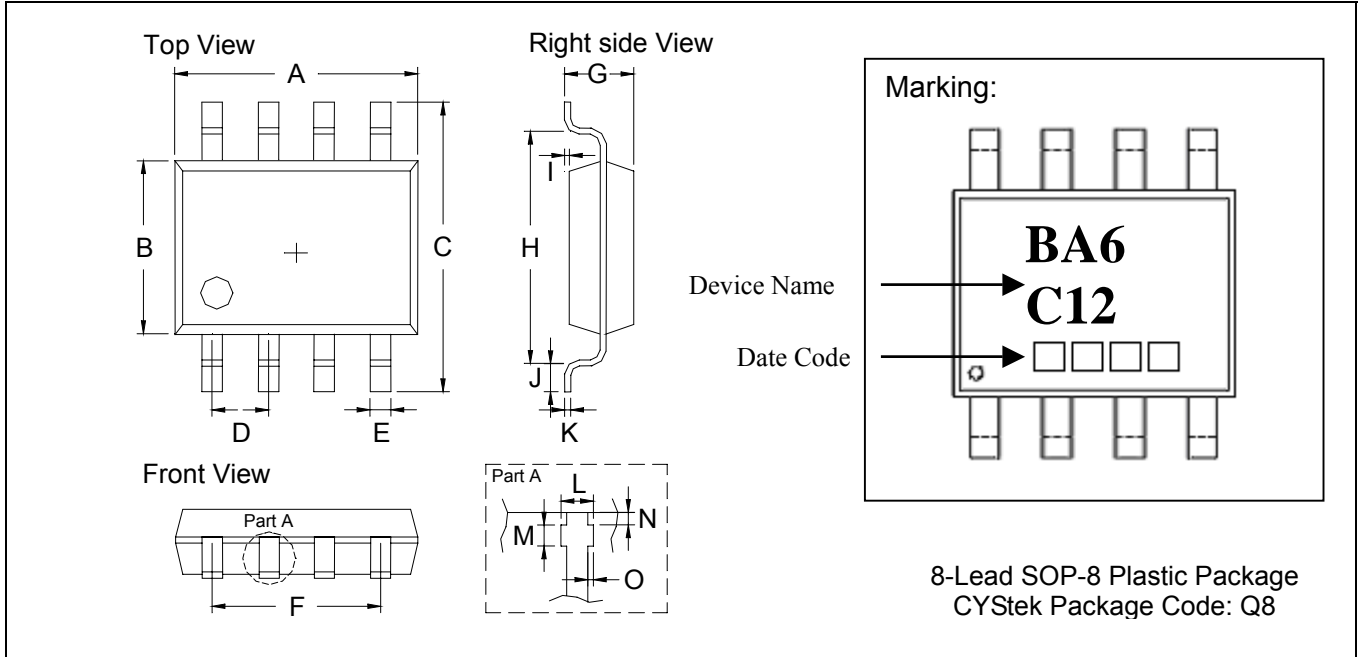

*: Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.1909	0.2007	4.85	5.10	I	0.0019	0.0078	0.05	0.20
B	0.1515	0.1555	3.85	3.95	J	0.0118	0.0275	0.30	0.70
C	0.2283	0.2441	5.80	6.20	K	0.0074	0.0098	0.19	0.25
D	0.0480	0.0519	1.22	1.32	L	0.0145	0.0204	0.37	0.52
E	0.0145	0.0185	0.37	0.47	M	0.0118	0.0197	0.30	0.50
F	0.1472	0.1527	3.74	3.88	N	0.0031	0.0051	0.08	0.13
G	0.0570	0.0649	1.45	1.65	O	0.0000	0.0059	0.00	0.15
H	0.1889	0.2007	4.80	5.10					

Notes: 1.Controlling dimension: millimeters.
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material:

- Lead: Pure tin plated.
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0.

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.