

P-Channel Enhancement Mode Power MOSFET


MTD5D0P03H8

BV _{DSS}		-30V
I _D @V _{GS} =-10V, T _C =25°C		-90A
I _D @V _{GS} =-10V, T _A =25°C		-22A
R _{DSON(TYP)}	V _{GS} =-10V, I _D =-25A	3.9mΩ
	V _{GS} =-6V, I _D =-10A	5.6mΩ


Features

- Single Drive Requirement
- Low On-resistance
- Fast Switching Characteristic
- Pb-free lead plating and Halogen-free package

Symbol

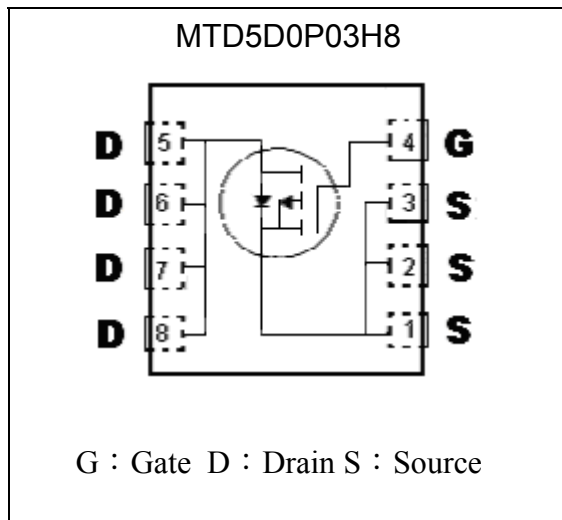


Outline

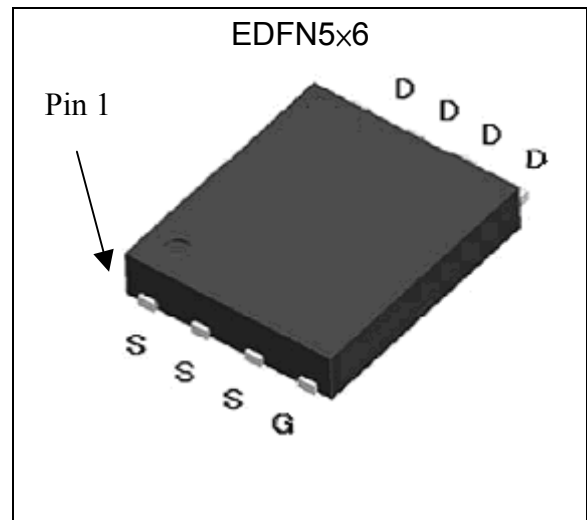

Ordering Information

Device	Package	Shipping
MTD5D0P03H8-0-T6-G	DFN5x6 (Pb-free lead plating and halogen-free package)	3000 pcs / Tape & Reel

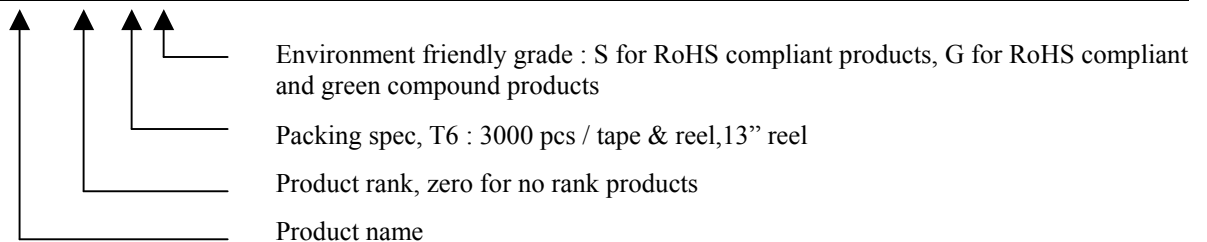



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	10s	Steady State	Unit	
Drain-Source Voltage	V _{DS}	-30		V	
Gate-Source Voltage	V _{GS}	±25			
Continuous Drain Current @ T _C =25°C, V _{GS} =-10V (Note1)	I _D	-90		A	
Continuous Drain Current @ T _C =100°C, V _{GS} =-10V (Note1)		-57			
Continuous Drain Current @ T _A =25°C, V _{GS} =-10V (Note2)	I _{DSM}	-22	-14.2		
Continuous Drain Current @ T _A =70°C, V _{GS} =-10V (Note2)		-17.6	-11.4		
Pulsed Drain Current (Note3)	I _{DM}	-200 *1,2			
Single Pulse Avalanche Current @ L=0.1mH	I _{AS}	-80			
Avalanche Energy @ L=0.5mH, I _D =-30A, V _{DD} =-15V (Note4)	E _{AS}	225		mJ	
Total Power Dissipation	P _D	T _C =25°C (Note1)	83.3		W
		T _C =100°C (Note1)	33.3		
	P _{DSM}	T _A =25°C (Note2)	5.0	2.1	
		T _A =70°C (Note2)	3.2	1.3	
Operating Junction and Storage Temperature Range	T _j , T _{stg}	-55~+150		°C	

Thermal Data

Parameter	Symbol	Typical	Maximum	Unit	
Thermal Resistance, Junction-to-case	R _{th,j-c}	1	1.5	°C/W	
Thermal Resistance, Junction-to-ambient (Note2)	R _{th,j-a}	t≤10s	18	25	°C/W
		Steady State	50	60	

- Note : 1. The power dissipation P_D is based on T_{J(MAX)}=150°C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.
2. The value of R_{θJA} is measured with the device mounted on 1 in² FR-4 board with 2 oz. copper, in a still air environment with T_A=25°C. The power dissipation P_{DSM} is based on R_{θJA} and the maximum allowed junction temperature of 150°C. The value in any given application depends on the user's specific board design.
3. Repetitive rating, pulse width limited by junction temperature T_{J(MAX)}=150°C. Ratings are based on low frequency and low duty cycles to keep initial T_J=25°C.
4. 100% tested by conditions of L=0.5mH, V_{GS}=-10V, I_{AS}=-26A, V_{DD}=-15V


Characteristics (Tc=25°C, unless otherwise specified)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static					
BV _{DSS}	-30	-	-	V	V _{GS} =0V, I _D =-250μA
V _{GS(th)}	-1.5	-	-3.0	V	V _{DS} = V _{GS} , I _D =-250μA
G _{FS} *1	-	32.2	-	S	V _{DS} = -10V, I _D =-20A
I _{GSS}	-	-	±100	nA	V _{GS} =±20V, V _{DS} =0V
I _{DSS}	-	-	-1	μA	V _{DS} = -24V, V _{GS} = 0V
	-	-	-25		V _{DS} = -24V, V _{GS} = 0, T _j =125°C
R _{DS(ON)} *1	-	3.9	5.5	mΩ	V _{GS} = -10V, I _D =-25A
	-	5.6	12	mΩ	V _{GS} = -6V, I _D =-10A

Dynamic *4					
Ciss	-	5607	-	pF	V _{DS} =-15V, V _{GS} =0V, f=1MHz
Coss	-	943	-		
Crss	-	429	-		
Qg *1, 2	-	91.2	-	nC	V _{DS} =-15V, V _{GS} =-10V, I _D =-25A
Qgs *1, 2	-	23.3	-		
Qgd *1, 2	-	23.3	-		
t _{d(ON)} *1, 2	-	30	-	ns	V _{DS} =-15V, I _D =-25A, V _{GS} =-10V, R _G =1 Ω
t _r *1, 2	-	24.2	-		
t _{d(OFF)} *1, 2	-	88.2	-		
t _f *1, 2	-	26.2	-		
Rg	-	3.6	-	Ω	f=1MHz
Source-Drain Diode					
V _{SD} *1	-	-0.83	-1.2	V	I _S =-25A, V _{GS} =0V
t _{rr}	-	31.2	-	ns	I _F =-25A, dI _F /dt=100A/μs
Q _{rr}	-	24.7	-	nC	

Note : *1.Pulse Test : Pulse Width ≤300μs, Duty Cycle≤2%
 *2.Independent of operating temperature
 *3.Pulse width limited by maximum junction temperature.
 *4.Guaranteed by design, not subject to production testing.


Recommended Soldering Footprint

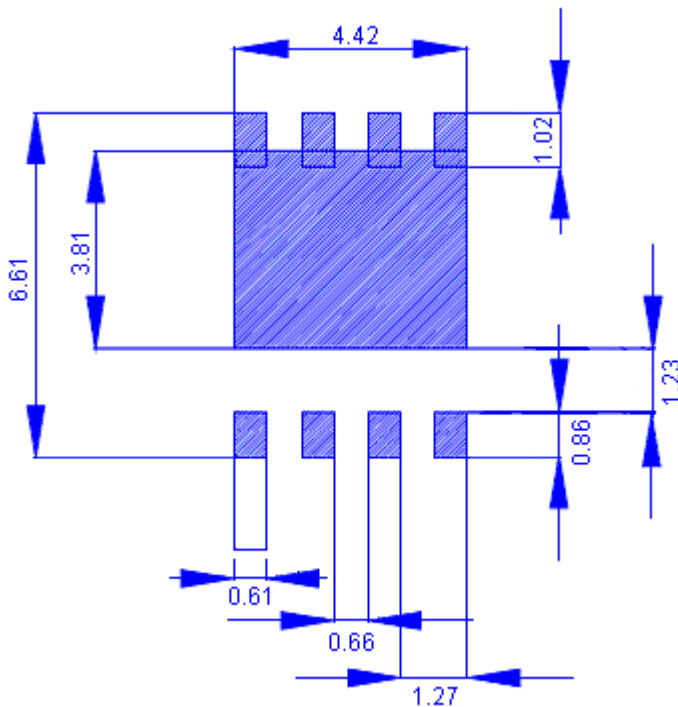


unit : mm

Typical Characteristics


Typical Output Characteristics

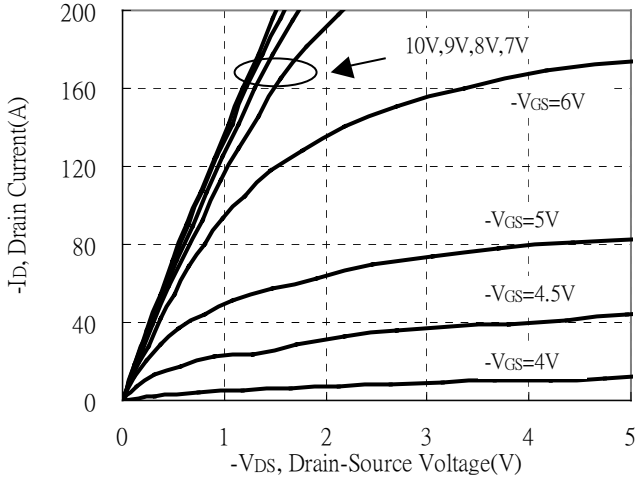


Breakdown Voltage vs Ambient Temperature

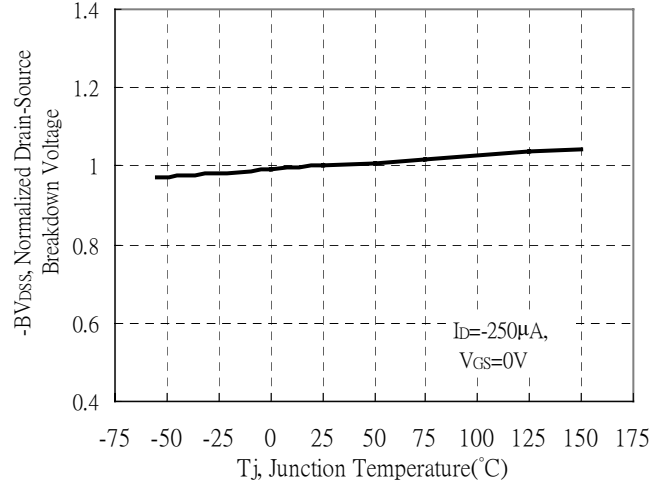


Static Drain-Source On-State resistance vs Drain Current

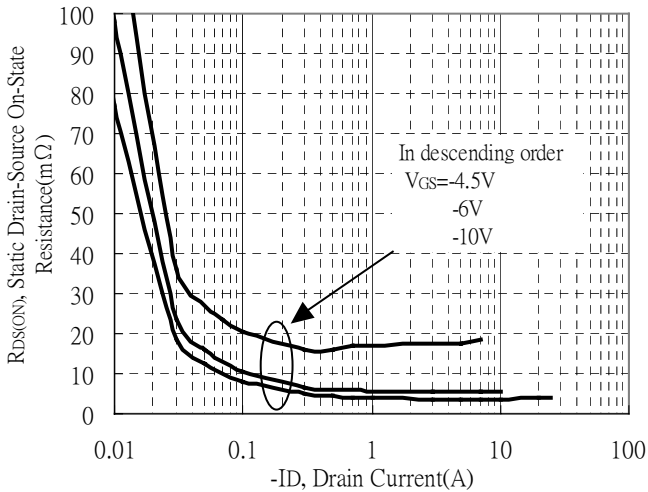


Reverse Drain Current vs Source-Drain Voltage

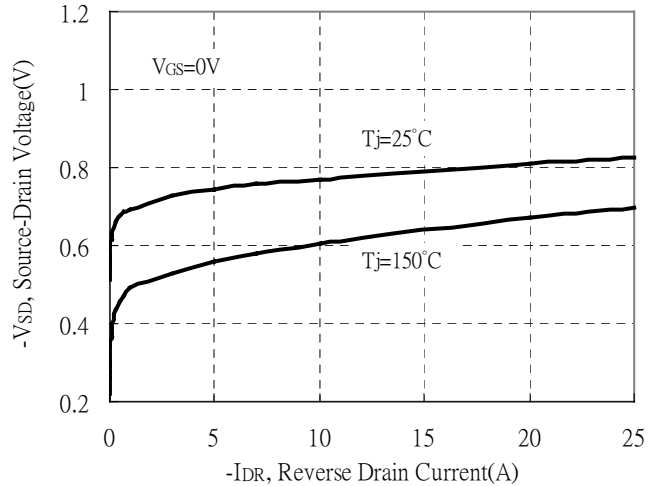

Static Drain-Source On-State Resistance vs Gate-Source Voltage

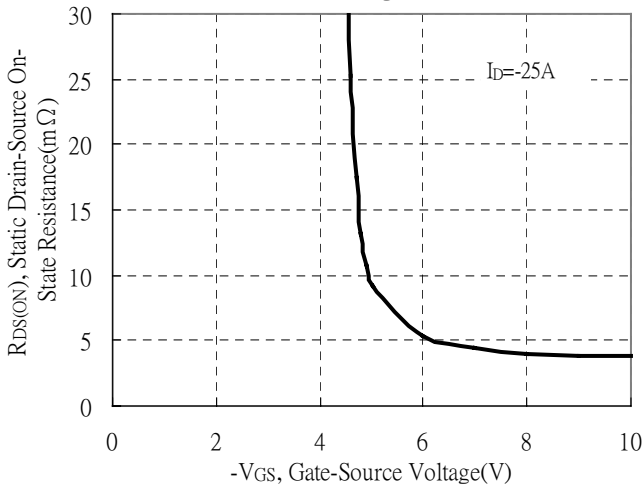


Drain-Source On-State Resistance vs Junction Temperature

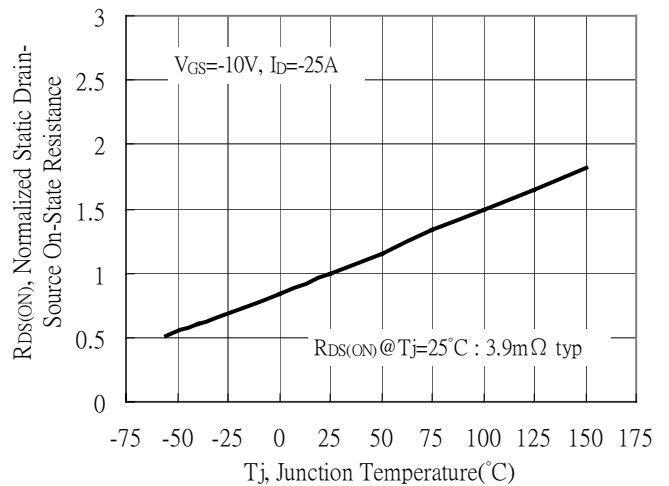




Typical Characteristics(Cont.)


Capacitance vs Drain-to-Source Voltage

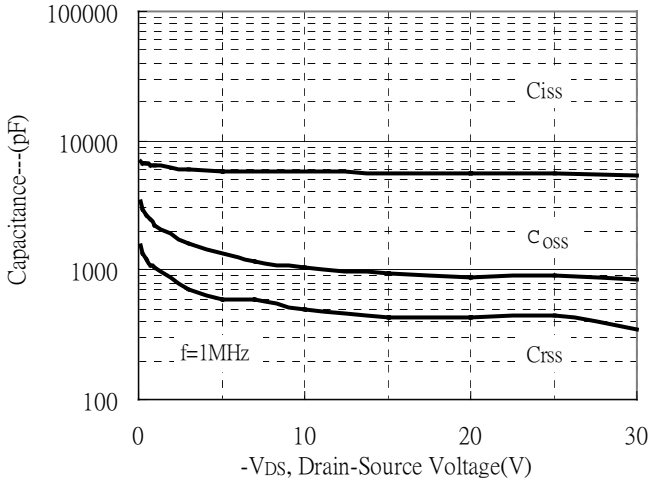


Threshold Voltage vs Junction Temperature

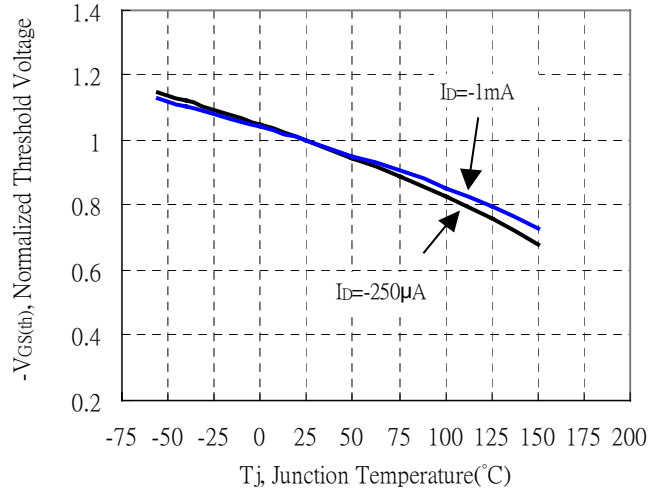


Maximum Safe Operating Area

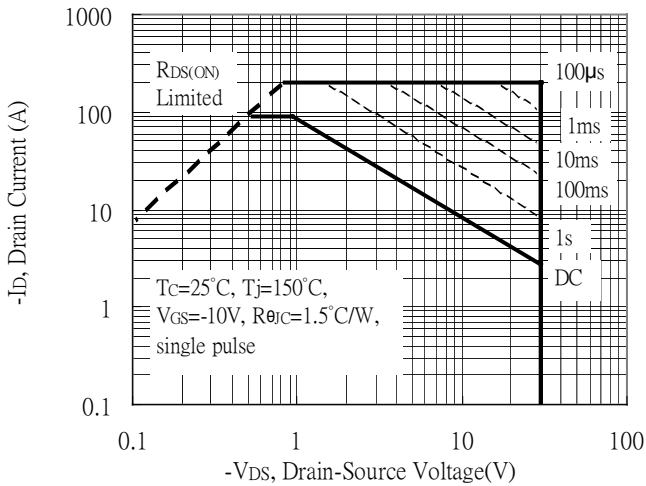


Gate Charge Characteristics

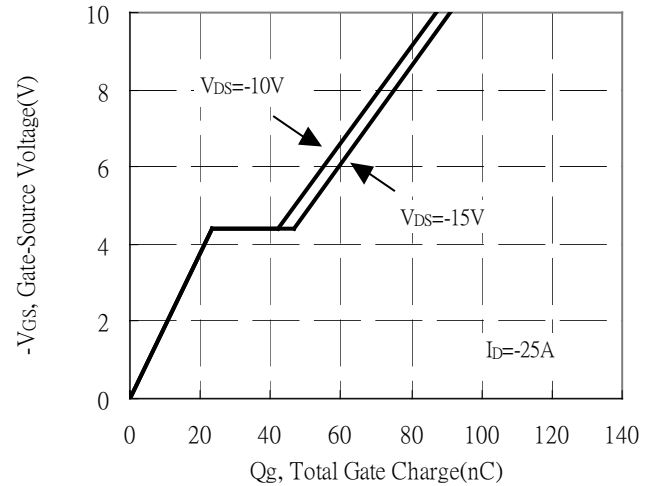

Maximum Drain Current vs Case Temperature

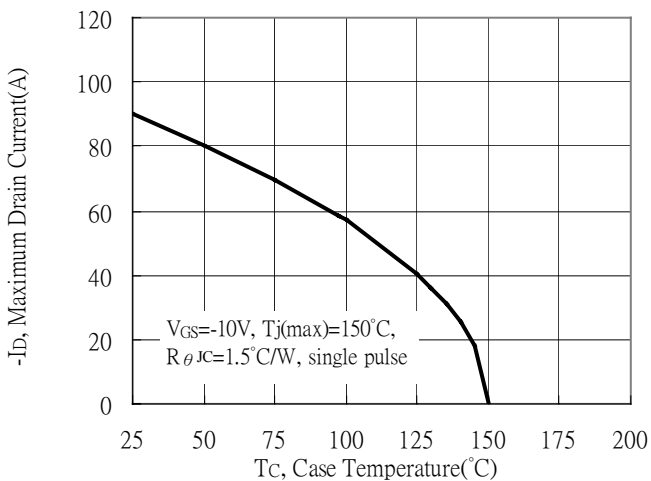


Forward Transfer Admittance vs Drain Current

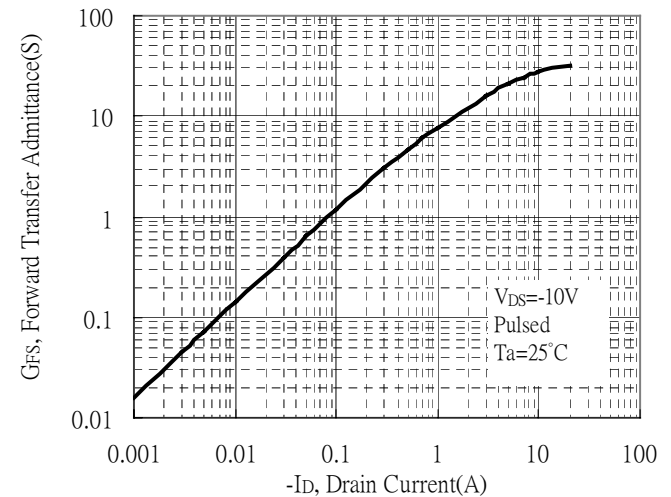


Typical Characteristics(Cont.)


Typical Transfer Characteristics

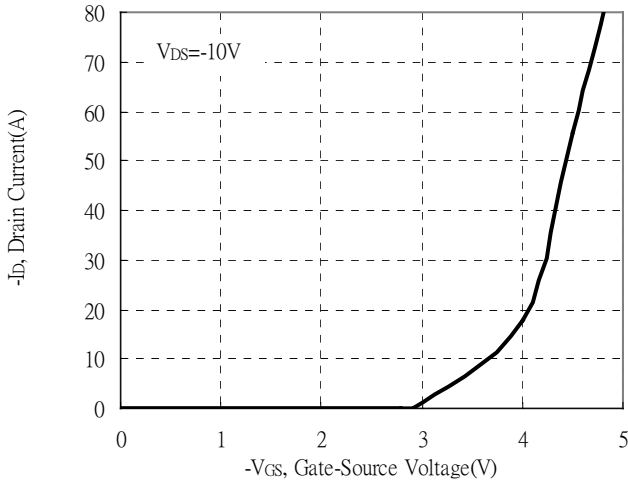


Power Derating Curve

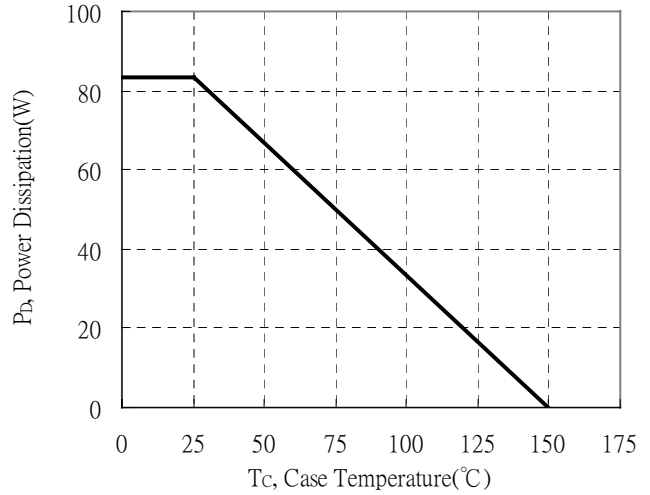


Transient Thermal Response Curves

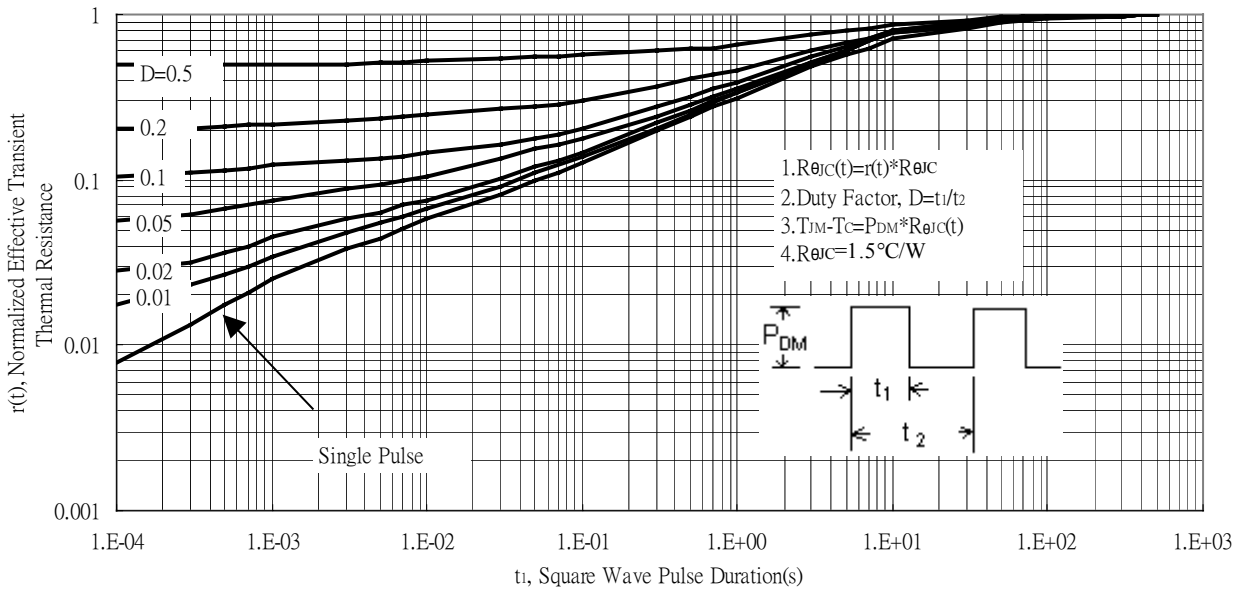

Reel Dimension

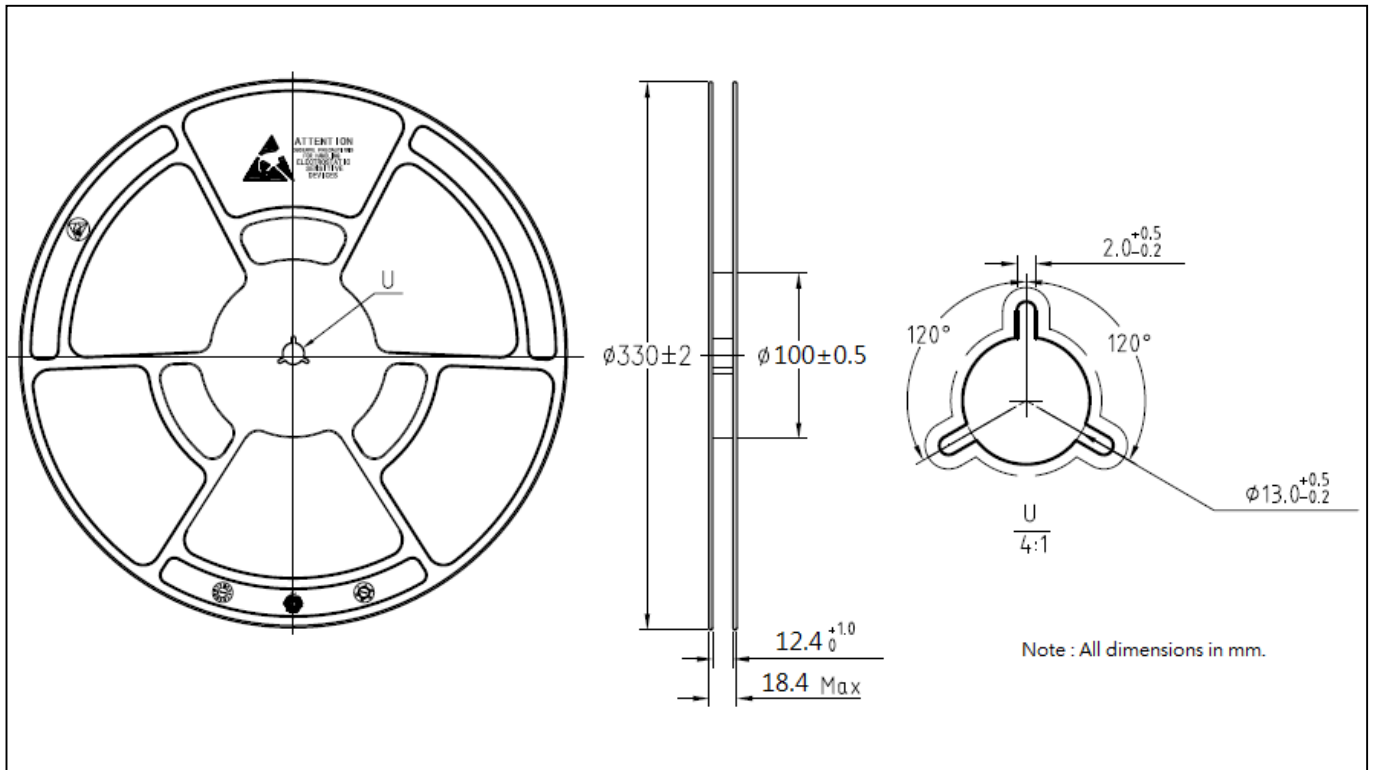

Carrier Tape Dimension

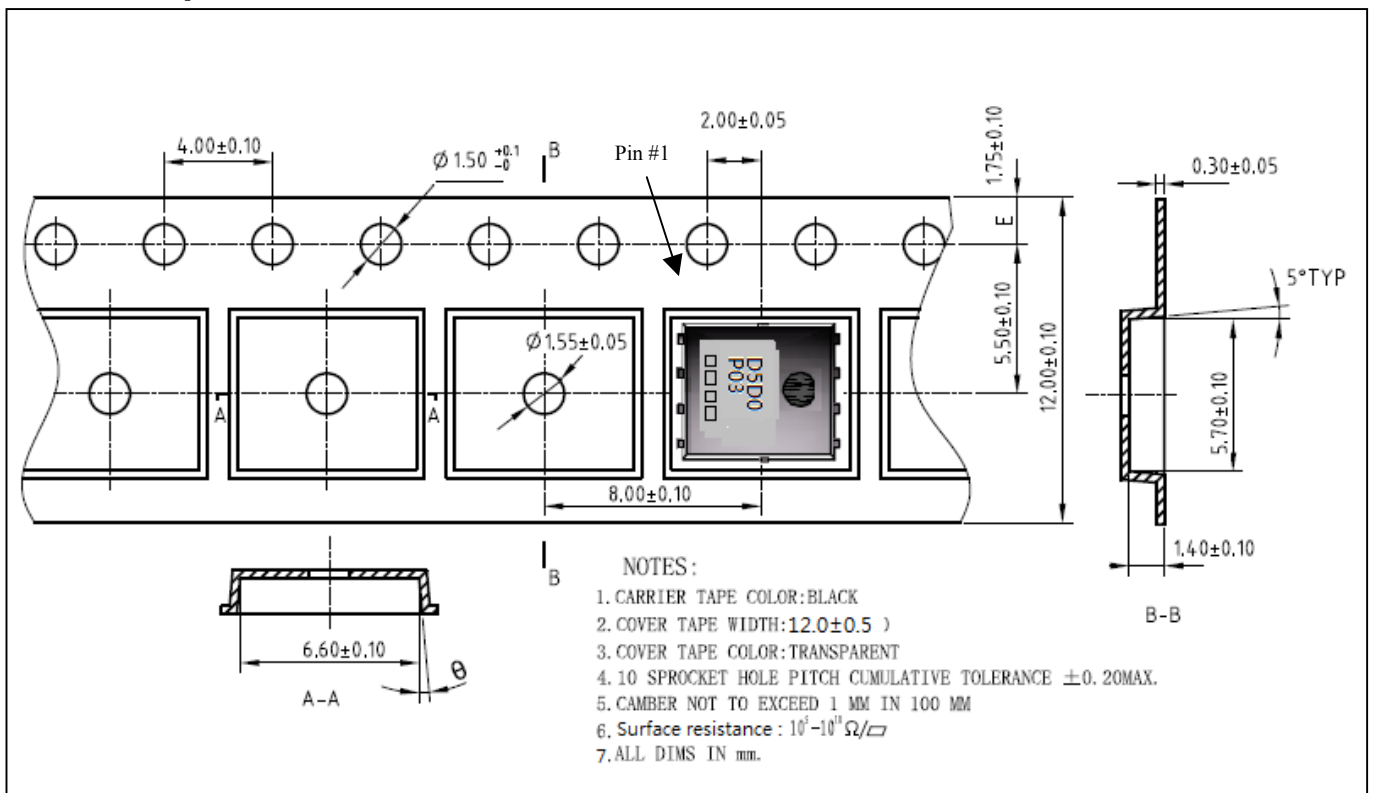

Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds


Recommended temperature profile for IR reflow



Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (T _{smax} to T _p)	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(T _{s min})	100°C	150°C
-Temperature Max(T _{s max})	150°C	200°C
-Time(t _{s min} to t _{s max})	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (T _L)	183°C	217°C
- Time (t _L)	60-150 seconds	60-150 seconds
Peak Temperature(T _p)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(t _p)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

DFN5x6 Dimension

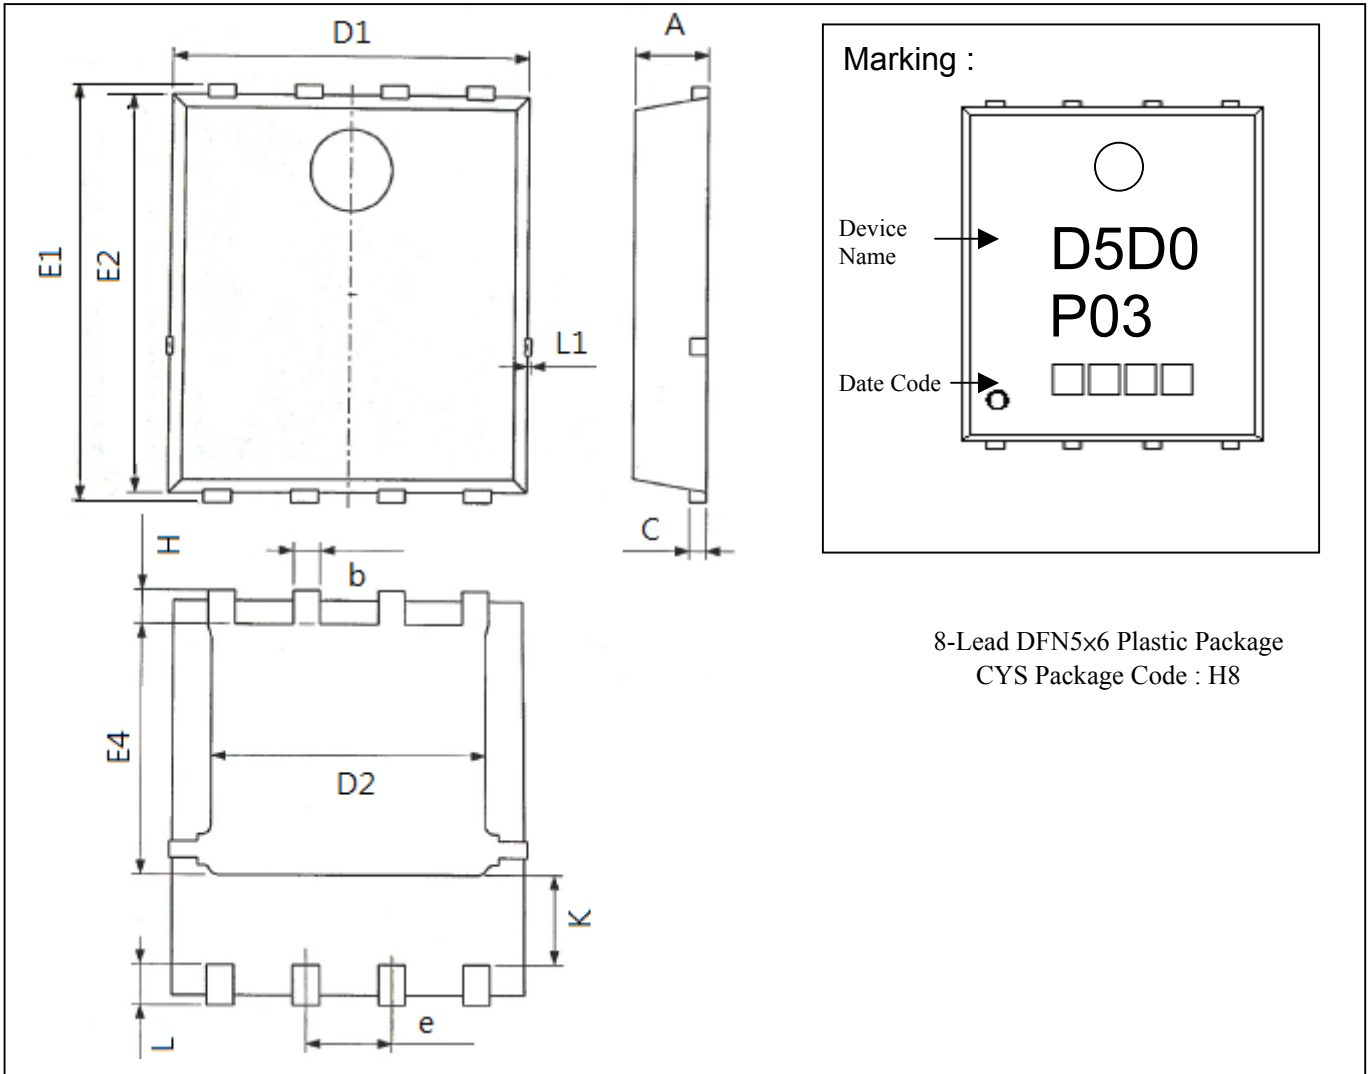

DIM	Millimeters		Inches		DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	1.000	1.200	0.0394	0.0472	E2	5.660	6.060	0.2228	0.2386
b	0.300	0.500	0.0118	0.0197	E4	3.520	3.920	0.1386	0.1543
C	0.154	0.354	0.0061	0.0139	H	0.400	0.600	0.0157	0.0236
D1	5.000	5.400	0.1969	0.2126	K	1.150	1.450	0.0453	0.0571
D2	3.800	4.250	0.1496	0.1673	L	0.300	0.700	0.0118	0.0276
e	1.170	1.370	0.0461	0.0539	L1	0.000	0.120	0.0000	0.0047
E1	5.950	6.350	0.2343	0.2500					

Notes: 1.Controlling dimension: millimeters.
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material:

- Lead: Pure tin plated.
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0.

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.