

**N-Channel Enhancement Mode Power MOSFET**


# MTN9N50BE3

$BV_{DSS}$	500V
$I_D @ V_{GS}=10V, T_C=25^\circ C$	8.5A
$I_D @ V_{GS}=10V, T_C=100^\circ C$	5.4A
$R_{DS(on)(TYP)} @ V_{GS}=10V, I_D=4.5A$	0.71 $\Omega$


**Features**

- Low Gate Charge
- Simple Drive Requirement
- Fast Switching Characteristic
- RoHS compliant package

**Symbol**

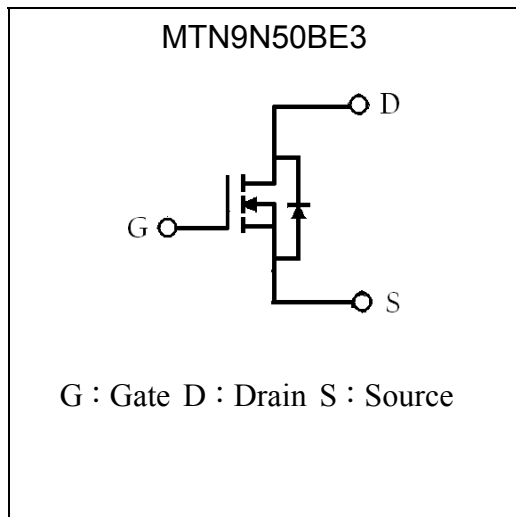


**Outline**

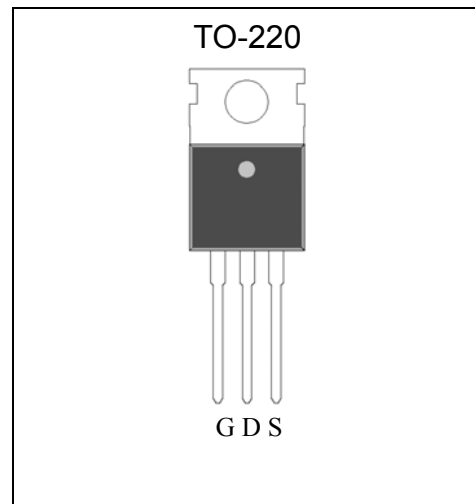

**Ordering Information**

Device	Package	Shipping
MTN9N50BE3-0-UB-X	TO-220 (RoHS compliant)	50 pcs/tube, 20 tubes/box, 4 boxes / carton

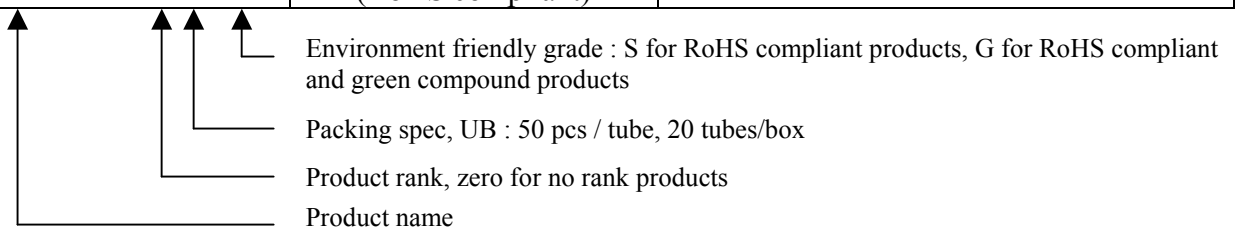

**Absolute Maximum Ratings** ( $T_C=25^{\circ}\text{C}$ )

Parameter	Symbol	Limits	Unit
Drain-Source Voltage (Note 1)	$V_{DS}$	500	V
Gate-Source Voltage	$V_{GS}$	$\pm 30$	
Continuous Drain Current @ $T_C=25^{\circ}\text{C}$ , $V_{GS}=10\text{V}$	$I_D$	8.5*	A
Continuous Drain Current @ $T_C=100^{\circ}\text{C}$ , $V_{GS}=10\text{V}$		5.4*	
Pulsed Drain Current @ $V_{GS}=10\text{V}$ (Note 2)	$I_{DM}$	34*	
Single Pulse Avalanche Energy (Note 3)	$E_{AS}$	290	mJ
Avalanche Current (Note 2)	$I_{AS}$	8	A
Repetitive Avalanche Energy (Note 2)	$E_{AR}$	12.5	mJ
Maximum Temperature for Soldering @ Lead at 0.125 in(3.175mm) from case for 10 seconds	$T_L$	300	$^{\circ}\text{C}$
Total Power Dissipation ( $T_C=25^{\circ}\text{C}$ )	$P_D$	134	W
Linear Derating Factor above $25^{\circ}\text{C}$		1.07	W/ $^{\circ}\text{C}$
Operating Junction and Storage Temperature	$T_j, T_{stg}$	-55~+150	$^{\circ}\text{C}$

\*Drain current limited by maximum junction temperature

Note : 1.  $T_J=+25^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ .

2. Repetitive rating; pulse width limited by maximum junction temperature.

3.  $I_{AS}=8\text{A}$ ,  $V_{DD}=50\text{V}$ ,  $L=5\text{mH}$ ,  $R_G=25\Omega$ , starting  $T_J=+25^{\circ}\text{C}$ . 100% tested by conditions of  $I_{AS}=5.4\text{A}$ ,  $L=5\text{mH}$ ,  $V_{GS}=10\text{V}$ ,  $V_{DD}=50\text{V}$ **Thermal Data**

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-case, max	$R_{\theta JC}$	0.93	$^{\circ}\text{C}/\text{W}$
Thermal Resistance, Junction-to-ambient, max	$R_{\theta JA}$	62.5	



**Characteristics (Tj=25°C, unless otherwise specified)**


Symbol	Min.	Typ.	Max.	Unit	Test Conditions
<b>Static</b>					
BV <sub>DSS</sub>	500	-	-	V	V <sub>GS</sub> =0V, I <sub>D</sub> =250μA
ΔBV <sub>DSS</sub> /ΔT <sub>j</sub>	-	0.6	-	V/°C	Reference to 25°C, I <sub>D</sub> =250μA
V <sub>GS(th)</sub>	2.0	-	4.0	V	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> =250μA
*G <sub>FS</sub>	-	8	-	S	V <sub>DS</sub> =15V, I <sub>D</sub> =4A
I <sub>GSS</sub>	-	-	±100	nA	V <sub>GS</sub> =±30V, V <sub>DS</sub> =0V
I <sub>DSS</sub>	-	-	1	μA	V <sub>DS</sub> =500V, V <sub>GS</sub> =0V
	-	-	25		V <sub>DS</sub> =400V, V <sub>GS</sub> =0V, T <sub>j</sub> =125°C
*R <sub>DS(ON)</sub>	-	0.71	0.9	Ω	V <sub>GS</sub> =10V, I <sub>D</sub> =4.5A
<b>Dynamic</b>					
*Q <sub>g</sub>	-	26.4	-	nC	I <sub>D</sub> =4.5A, V <sub>DD</sub> =250V, V <sub>GS</sub> =10V
*Q <sub>gs</sub>	-	4.8	-		
*Q <sub>gd</sub>	-	9.9	-		
*t <sub>d(ON)</sub>	-	14	-	ns	V <sub>DD</sub> =250V, I <sub>D</sub> =4.5A, V <sub>GS</sub> =10V, R <sub>G</sub> =1 Ω
*t <sub>r</sub>	-	8.8	-		
*t <sub>d(OFF)</sub>	-	42.6	-		
*t <sub>f</sub>	-	7.8	-		
C <sub>iss</sub>	-	975	-	pF	V <sub>GS</sub> =0V, V <sub>DS</sub> =25V, f=1MHz
C <sub>oss</sub>	-	108	-		
C <sub>rss</sub>	-	76	-		
<b>Source-Drain Diode</b>					
*I <sub>S</sub>	-	-	8	A	
*I <sub>SM</sub>	-	-	32		
*V <sub>SD</sub>	-	0.8	1.2	V	I <sub>S</sub> =4.5A, V <sub>GS</sub> =0V
*t <sub>rr</sub>	-	242	-	ns	V <sub>GS</sub> =0V, I <sub>F</sub> =4.5, dI <sub>F</sub> /dt=100A/μs
*Q <sub>rr</sub>	-	1.5	-	μC	

\*Pulse Test : Pulse Width ≤300μs, Duty Cycle≤2%




### Typical Characteristics


Typical Output Characteristics

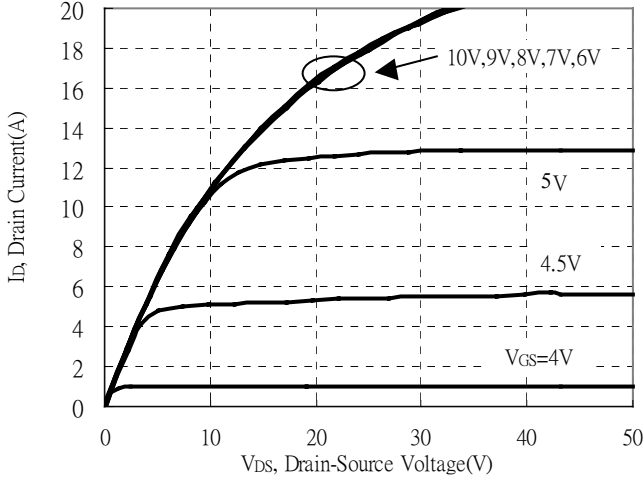


Static Drain-Source On-resistance vs Ambient Temperature

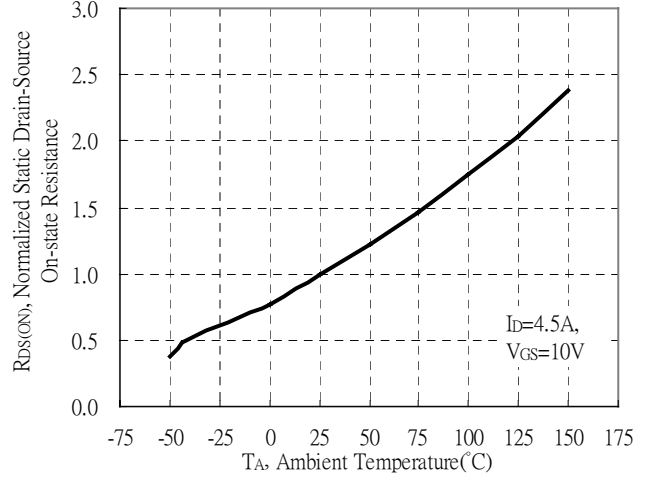


Static Drain-Source On-State resistance vs Drain Current

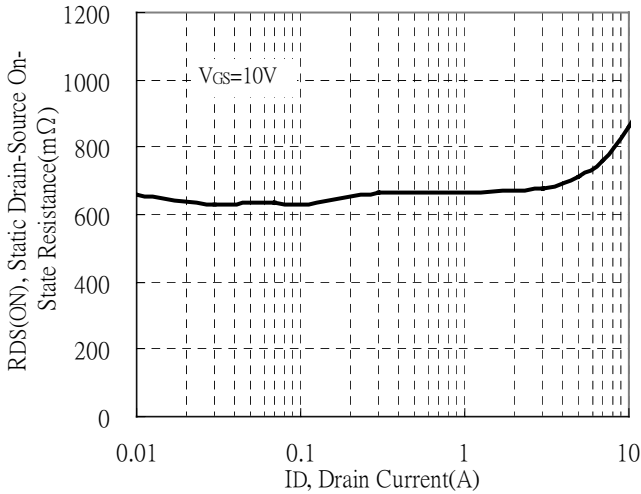


Drain Current vs Gate-Source Voltage

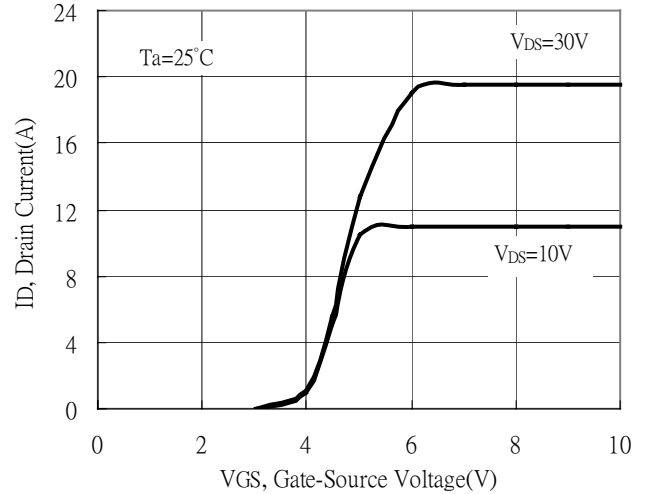

Static Drain-Source On-State Resistance vs Gate-Source Voltage

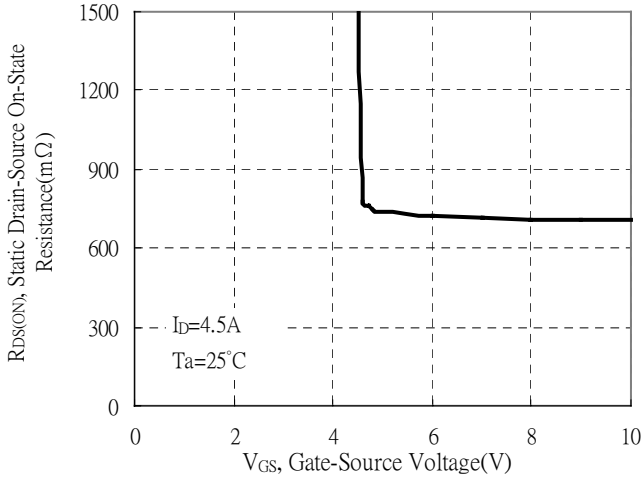


Forward Drain Current vs Source-Drain Voltage

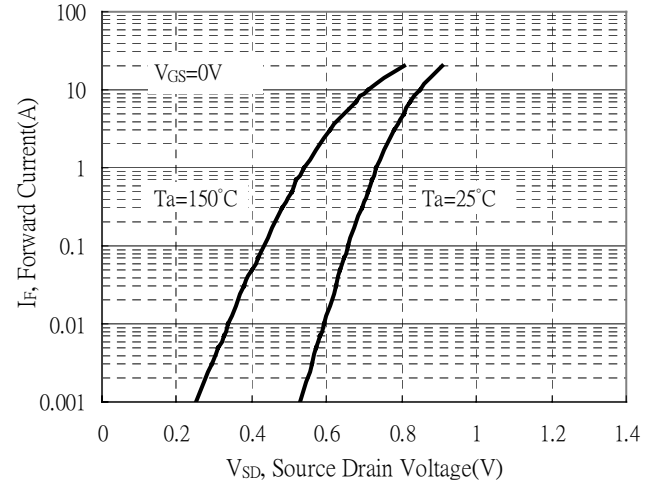


## Typical Characteristics(Cont.)


Capacitance vs Reverse Voltage

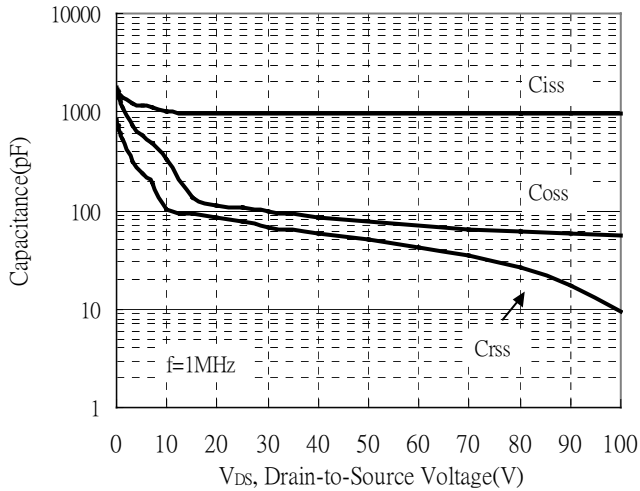


Breakdown Voltage vs Ambient Temperature

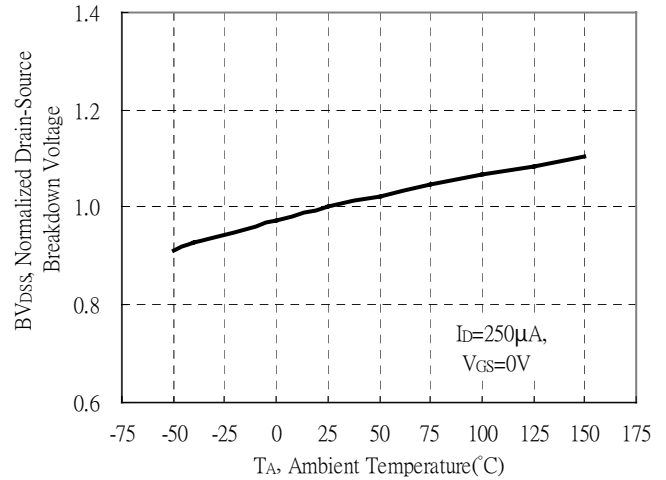


Maximum Safe Operating Area

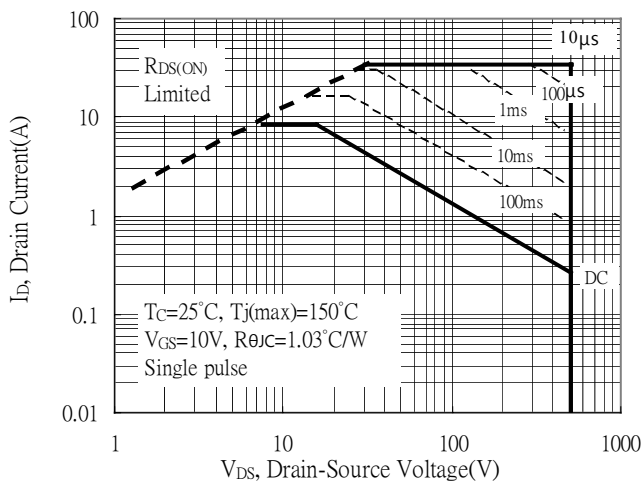


Gate Charge Characteristics

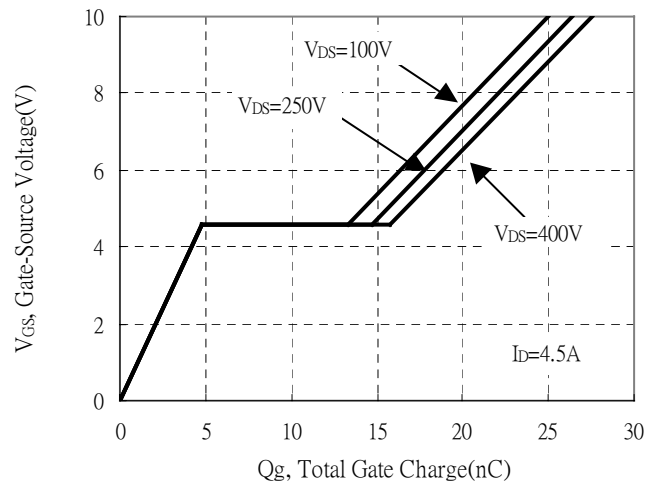

Maximum Drain Current vs Case Temperature

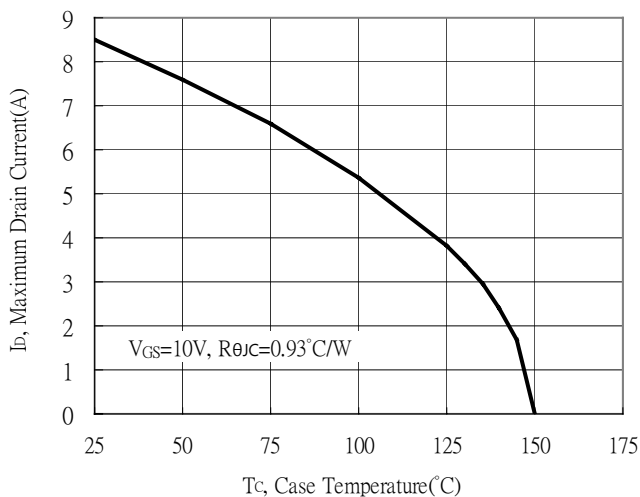


Threshold Voltage vs Junction Temperature

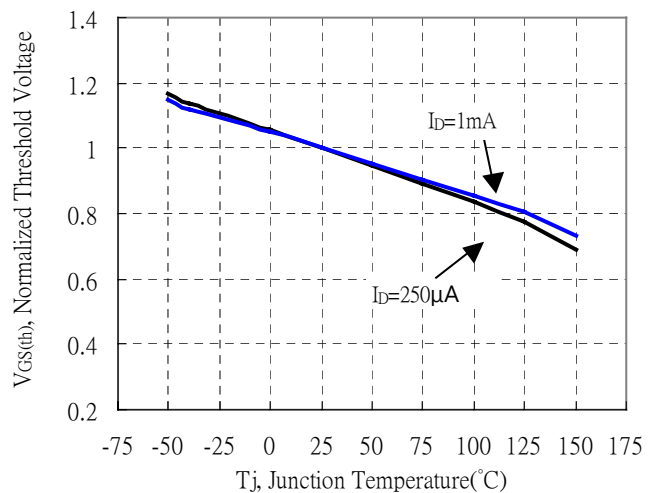




**Typical Characteristics(Cont.)**


Single Pulse Power Rating, Junction to Case

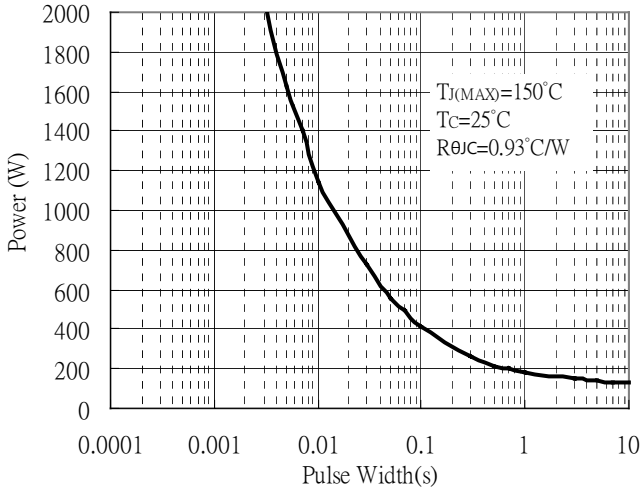

Forward Transfer Admittance vs Drain Current

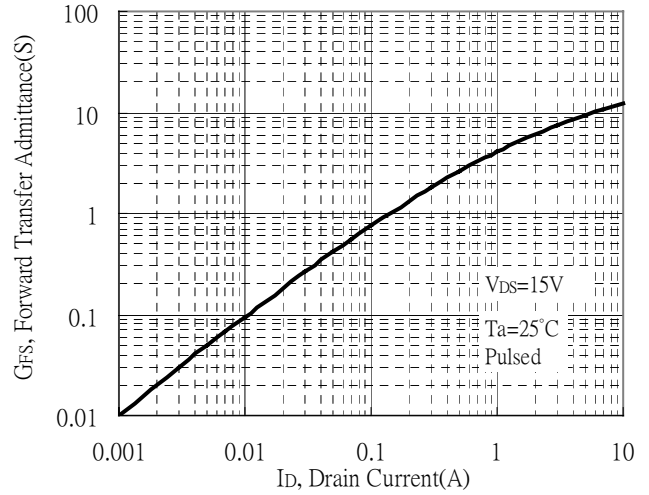


Transient Thermal Response Curves

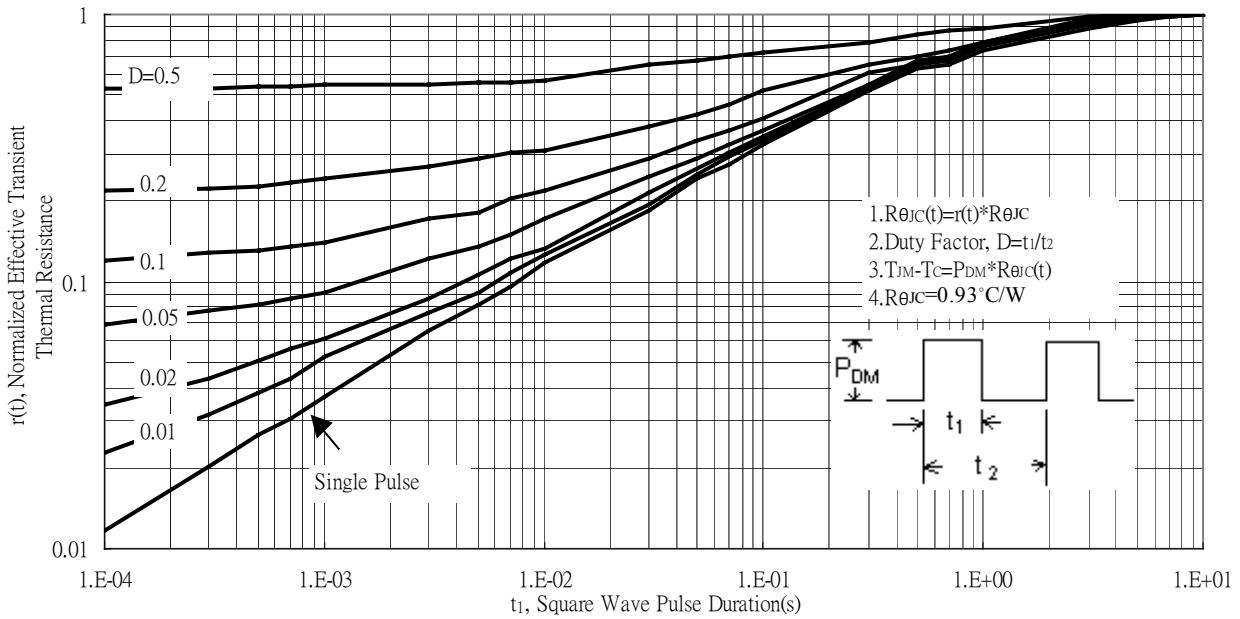

**Recommended wave soldering condition**

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds


**Recommended temperature profile for IR reflow**

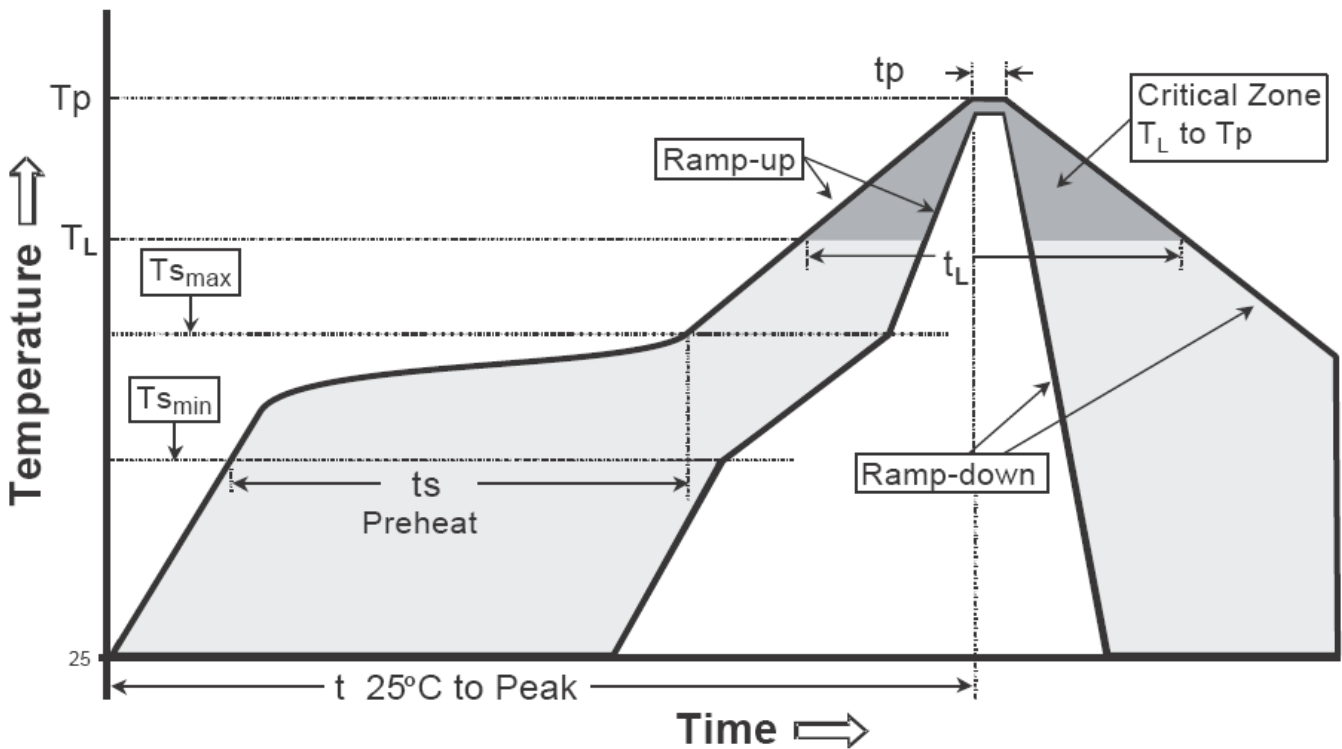

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (T <sub>smax</sub> to T <sub>p</sub> )	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(T <sub>s min</sub> )	100°C	150°C
-Temperature Max(T <sub>s max</sub> )	150°C	200°C
-Time(t <sub>s min</sub> to t <sub>s max</sub> )	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (T <sub>L</sub> )	183°C	217°C
- Time (t <sub>L</sub> )	60-150 seconds	60-150 seconds
Peak Temperature(T <sub>P</sub> )	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(t <sub>p</sub> )	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

**TO-220 Dimension**

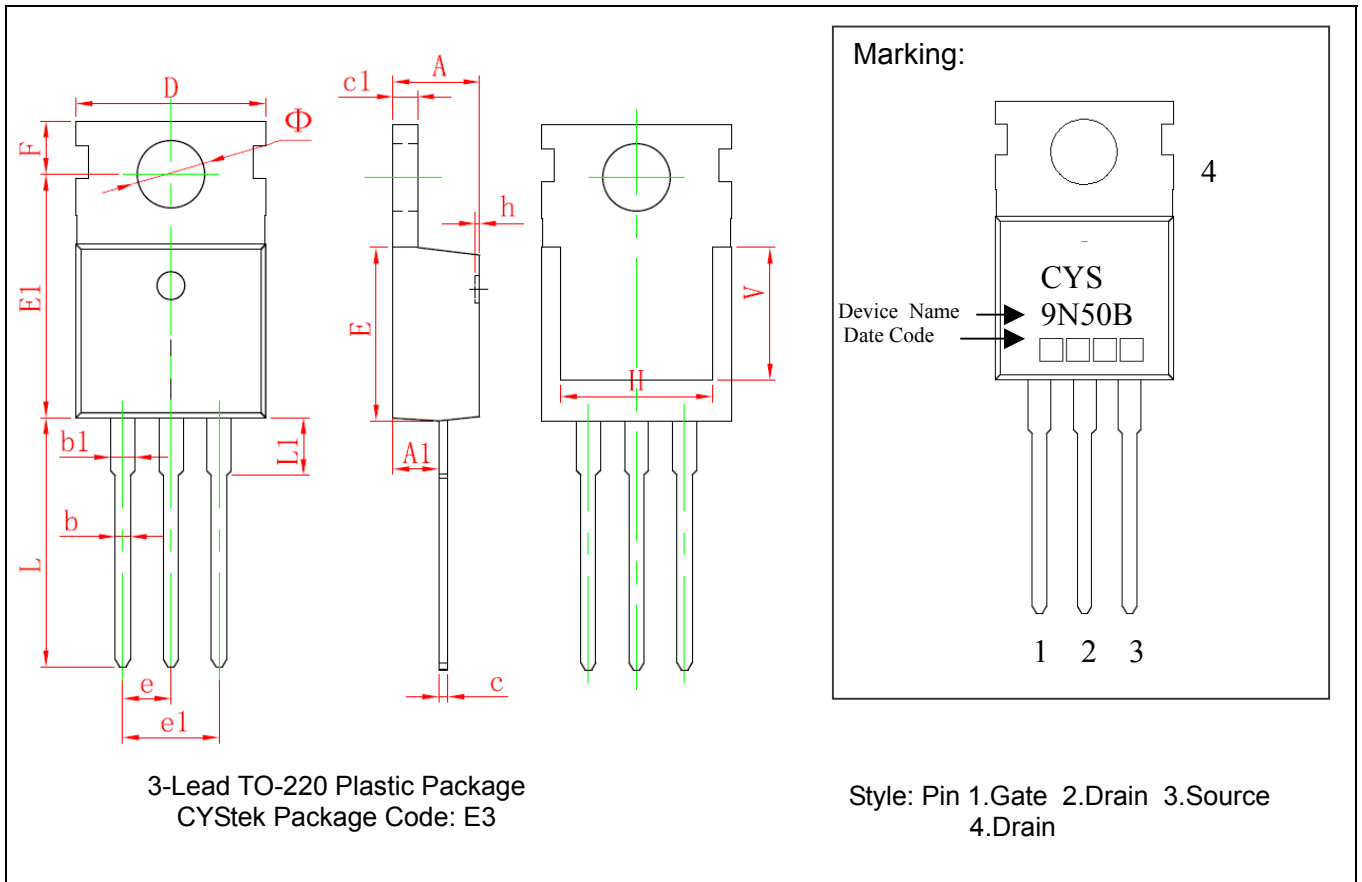

\*: Typical

DIM	Millimeters		Inches		DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	4.400	4.600	0.173	0.181	e	2.540*		0.100*	
A1	2.250	2.550	0.089	0.100	e1	4.980	5.180	0.196	0.204
b	0.710	0.910	0.028	0.036	F	2.650	2.950	0.104	0.116
b1	1.170	1.370	0.046	0.054	H	7.900	8.100	0.311	0.319
c	0.330	0.650	0.013	0.026	h	0.000	0.300	0.000	0.012
c1	1.200	1.400	0.047	0.055	L	12.900	13.400	0.508	0.528
D	9.910	10.250	0.390	0.404	L1	2.850	3.250	0.112	0.128
E	8.950	9.750	0.352	0.384	V	7.500	REF	0.295	REF
E1	12.650	12.950	0.498	0.510	Φ	3.400	3.800	0.134	0.150

Notes: 1.Controlling dimension: millimeters.  
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.  
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

**Material:**

- Lead: Pure tin plated.
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0.

**Important Notice:**

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.